


Case Study: MER/MSL Mars Rovers

- Discussion of Lunar Cargo Transport Vehicle as potential focus of term project
- Background on Mars rover development
- Mars Exploration Rovers
- Mars Science Laboratory




National Team Lunar Lander Concept

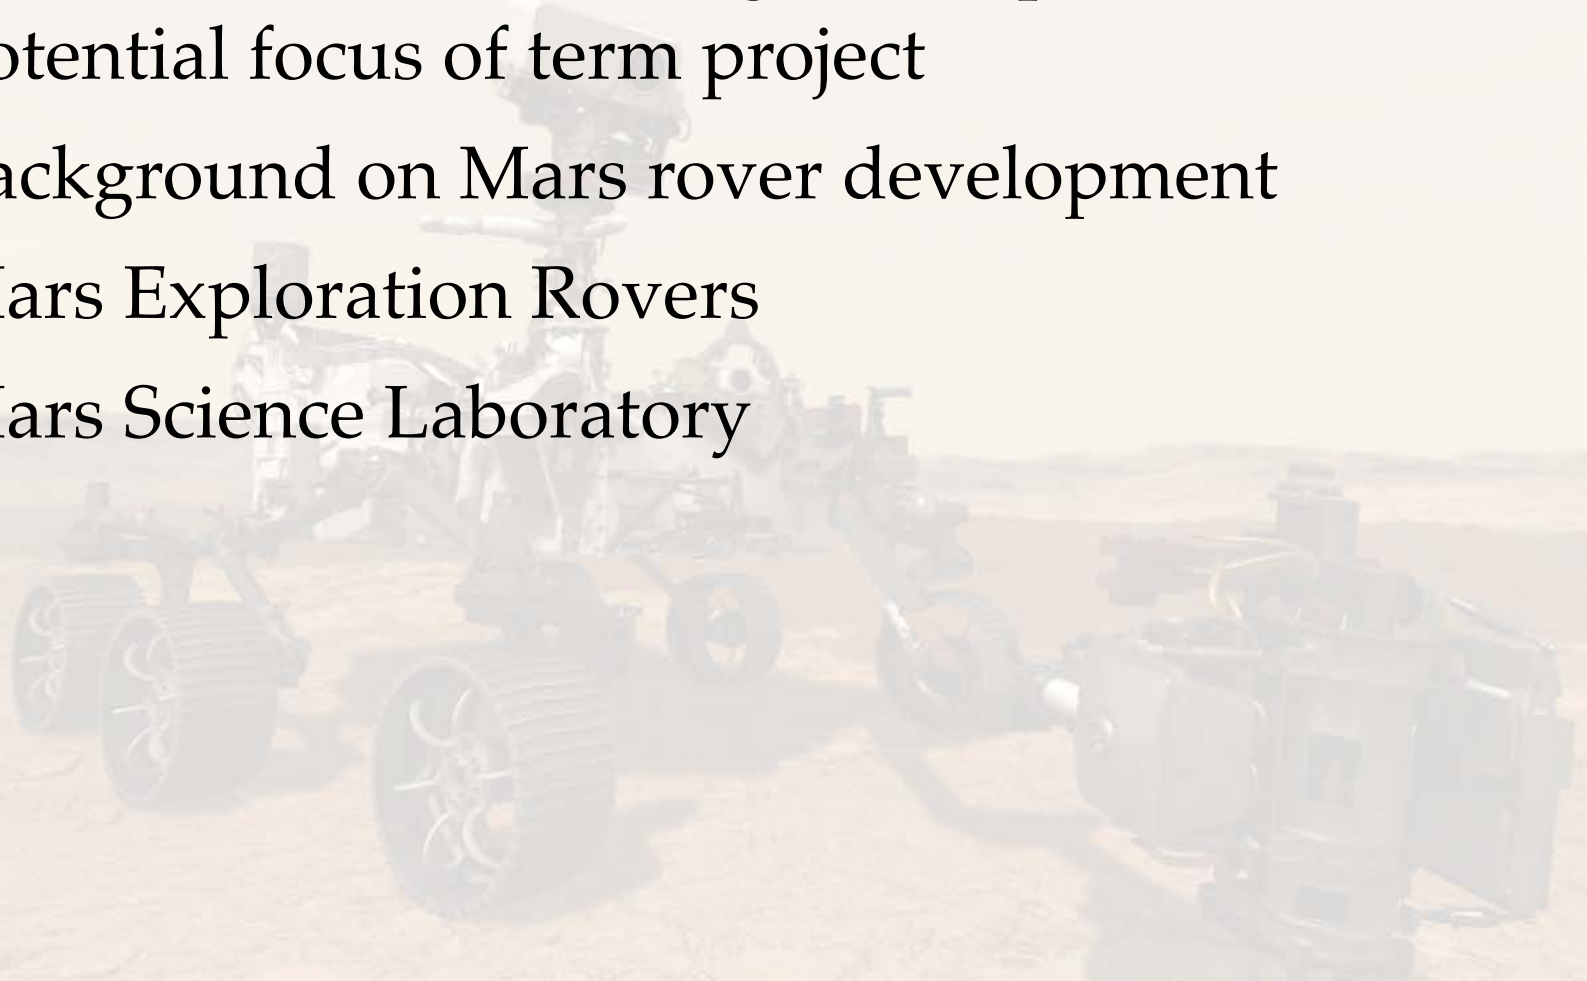


UNIVERSITY OF
MARYLAND

Lunar Crane Concept

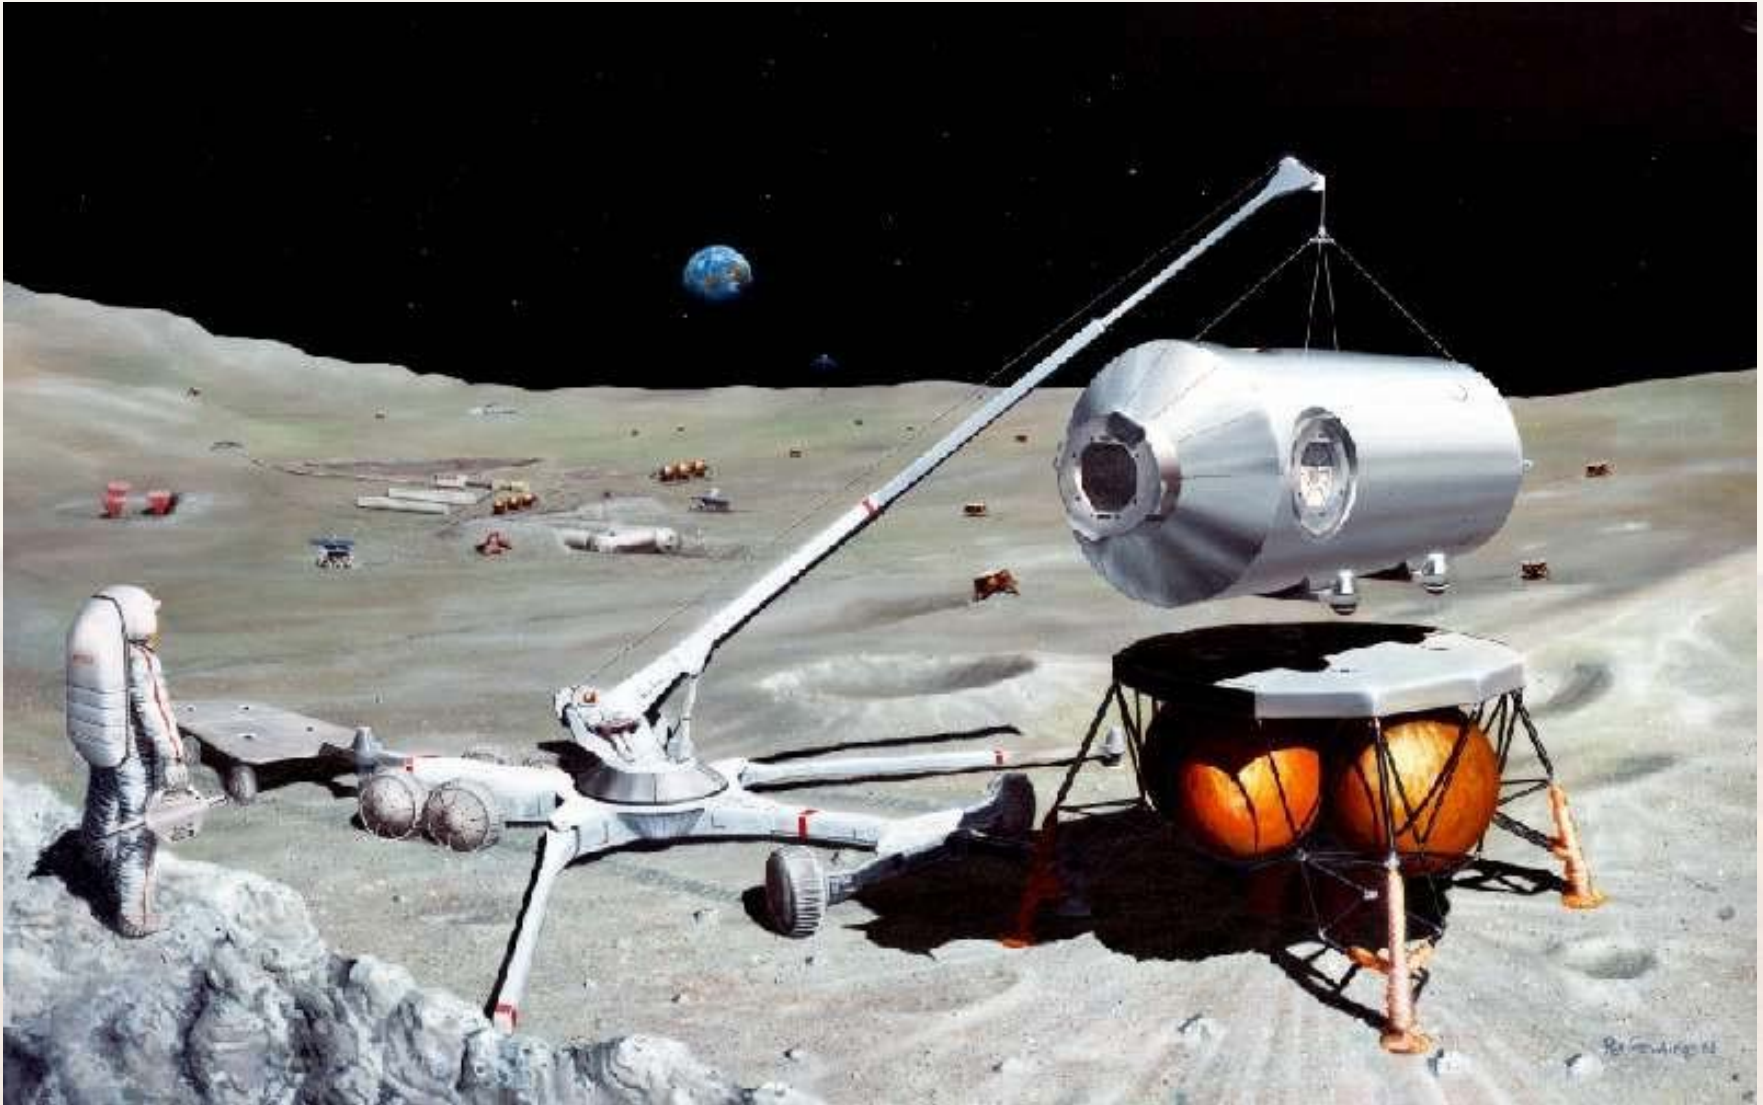

Lunar Inflatable Delivery System

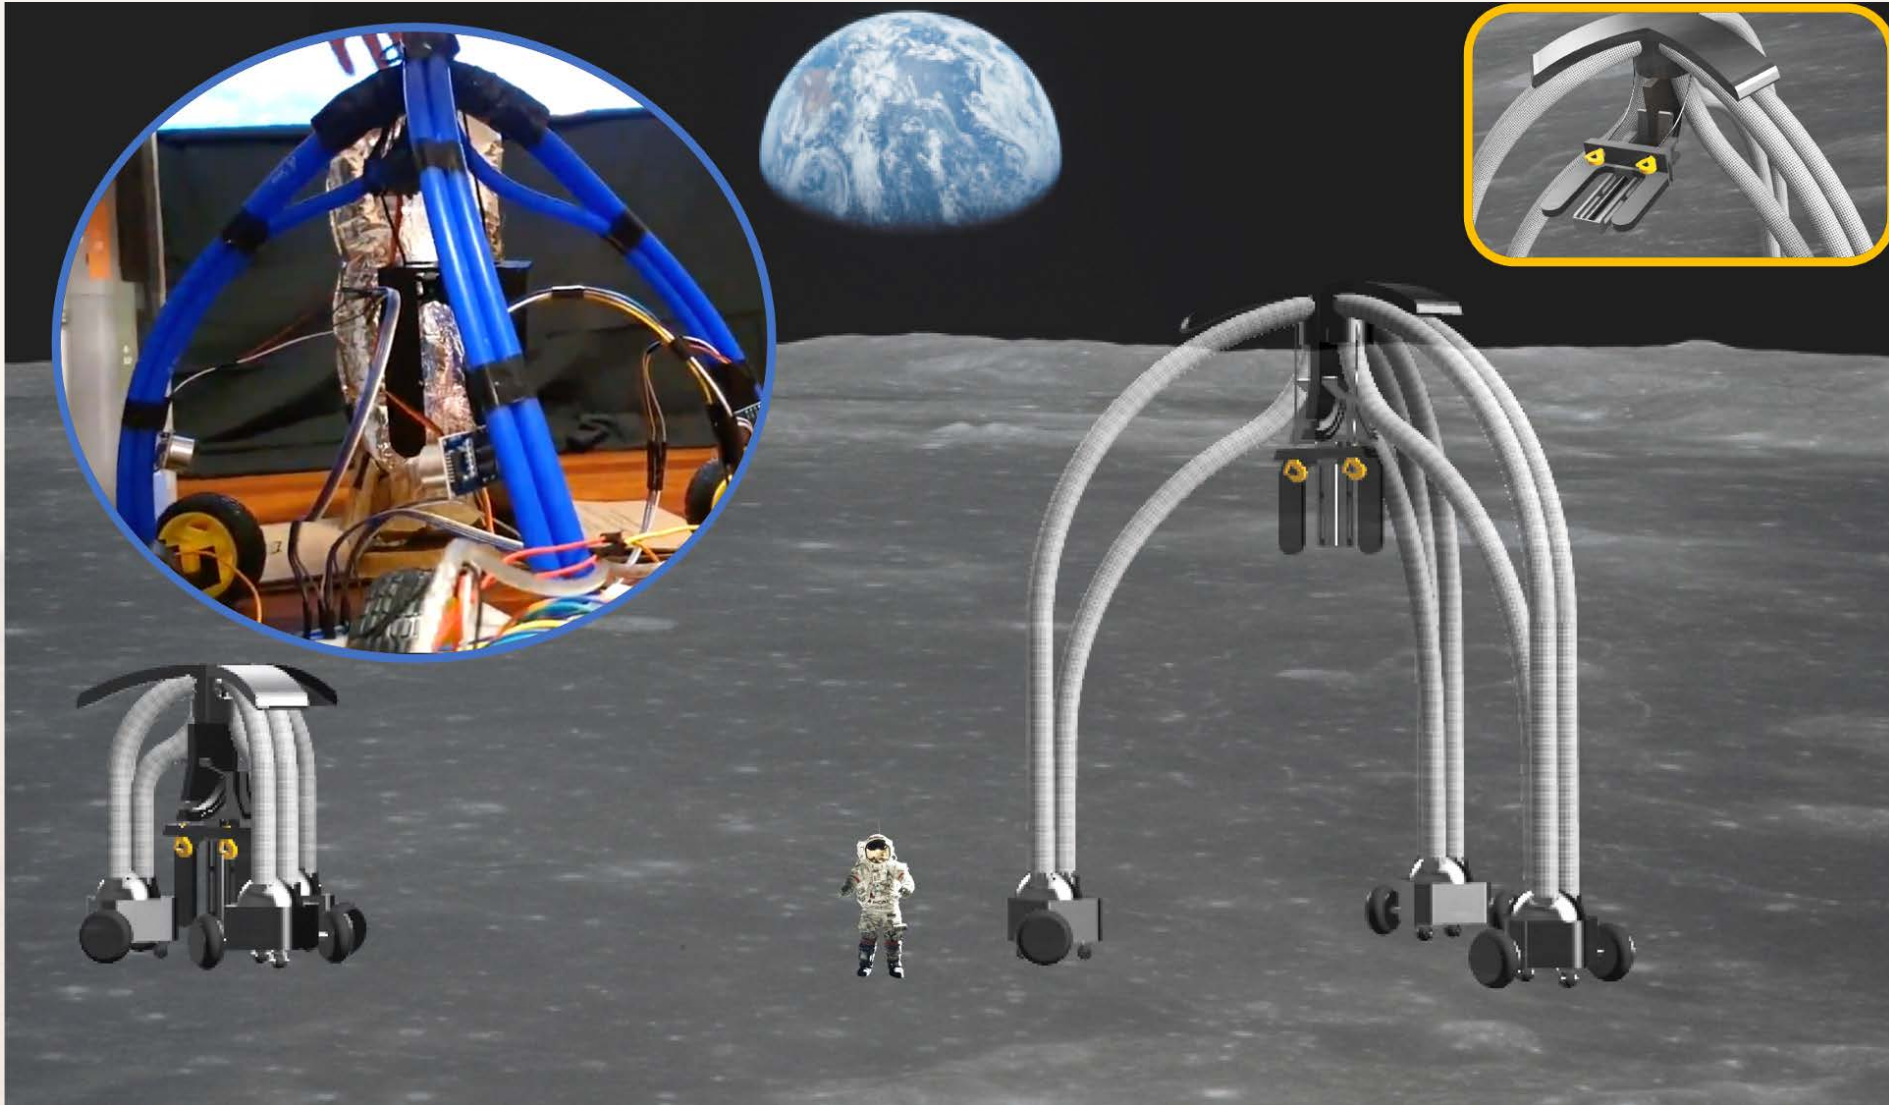

ATHLETE Unloading Lander



Lunar Cargo Transport Vehicle

- Design a vehicle to offload cargo from landers and transport them on the surface
- Offload and carry payloads up to 15 mt, 4.6 m in diameter and 7.8 m tall, up to 1000 m from lander
- Capable of self-deployment from lander
- Not designed for carrying humans or requiring human operators
- Initial operational capacity no later than 2028



Viking Panoramas (1976)





Mars Rover (circa 1990)




UNIVERSITY OF
MARYLAND

Mars Pathfinder (1997)

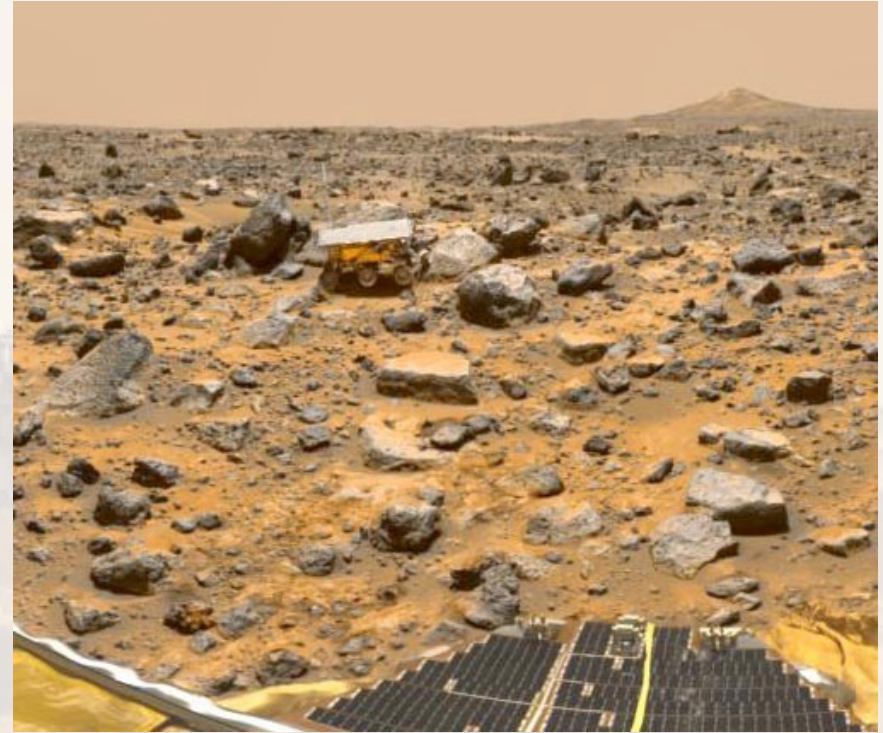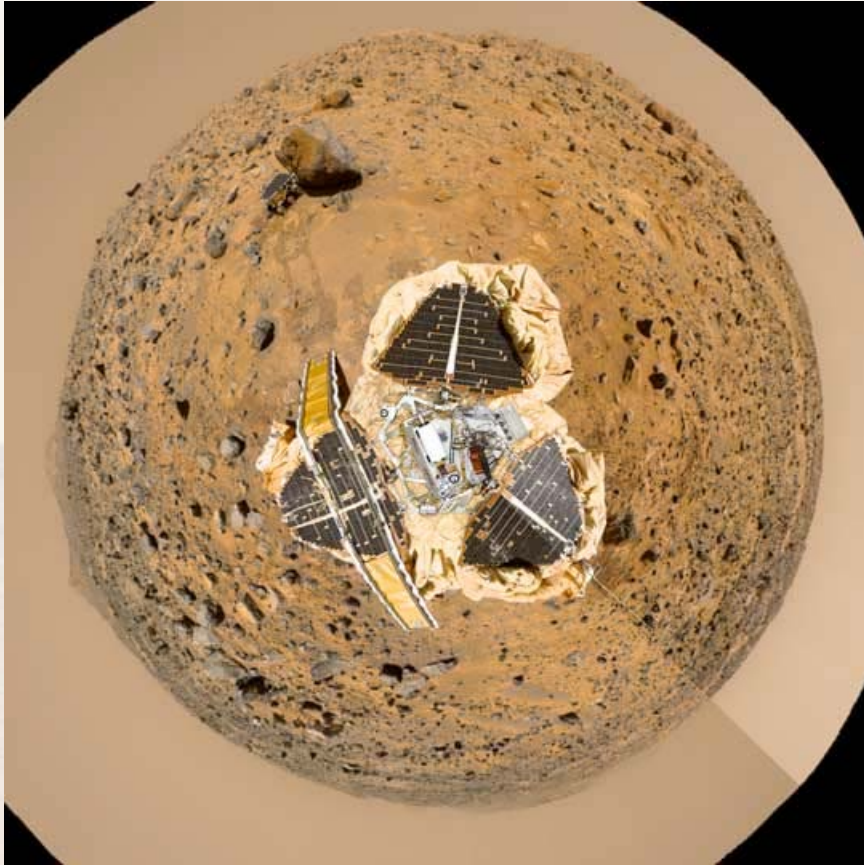

Mars Pathfinder Rover ("Sojourner")

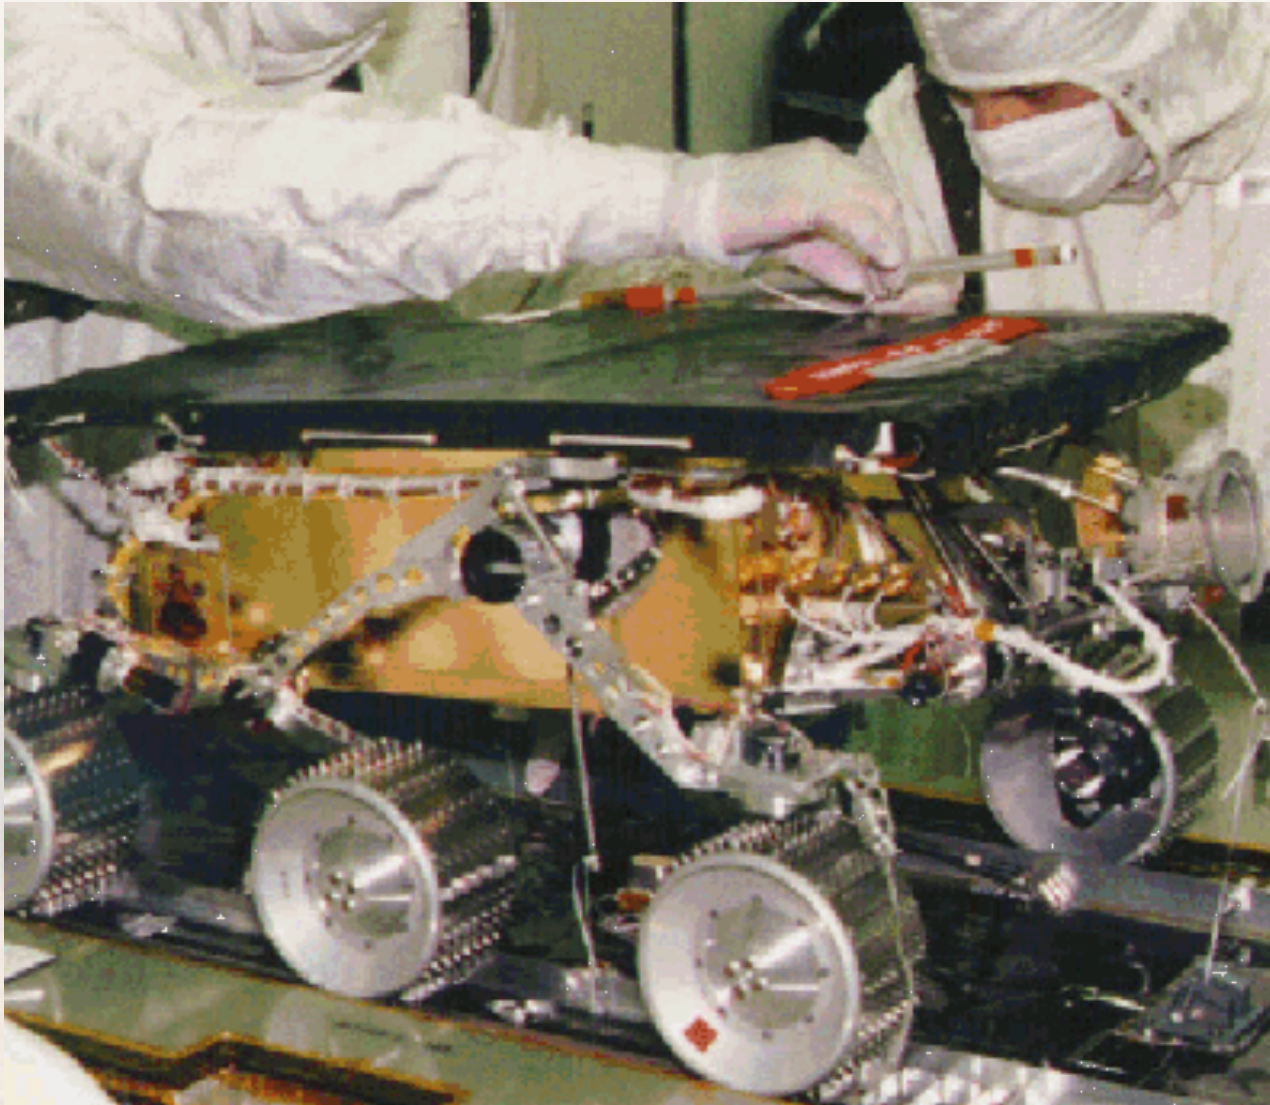

Grousers on Pathfinder Wheels



UNIVERSITY OF
MARYLAND

Case Study: MER/MSL Mars Rovers
ENAE 788X - Planetary Surface Robotics

1998 - A Bad Year at Mars

- Mars Climate Orbiter - Accidentally entered Mars atmosphere because of English-metric conversion error
- Mars Polar Lander - Known software bug shut down landing engines several hundred feet above the surface
- Two Deep Space 2 penetrators disappeared - some speculation they were on wrong frequency for MGS relay




Mars Exploration Rovers 2003

- Fly two missions
- Reuse demonstrated technologies from Mars Pathfinder (aeroshell, airbag landing system)
- All instruments are on the rover (no base station)
- “Follow the water”
- Extend technology for later missions - drive at least 600 m
- Take one PanCam panorama
- Operate for 90 sols
- Solar powered




Mars Exploration Rover

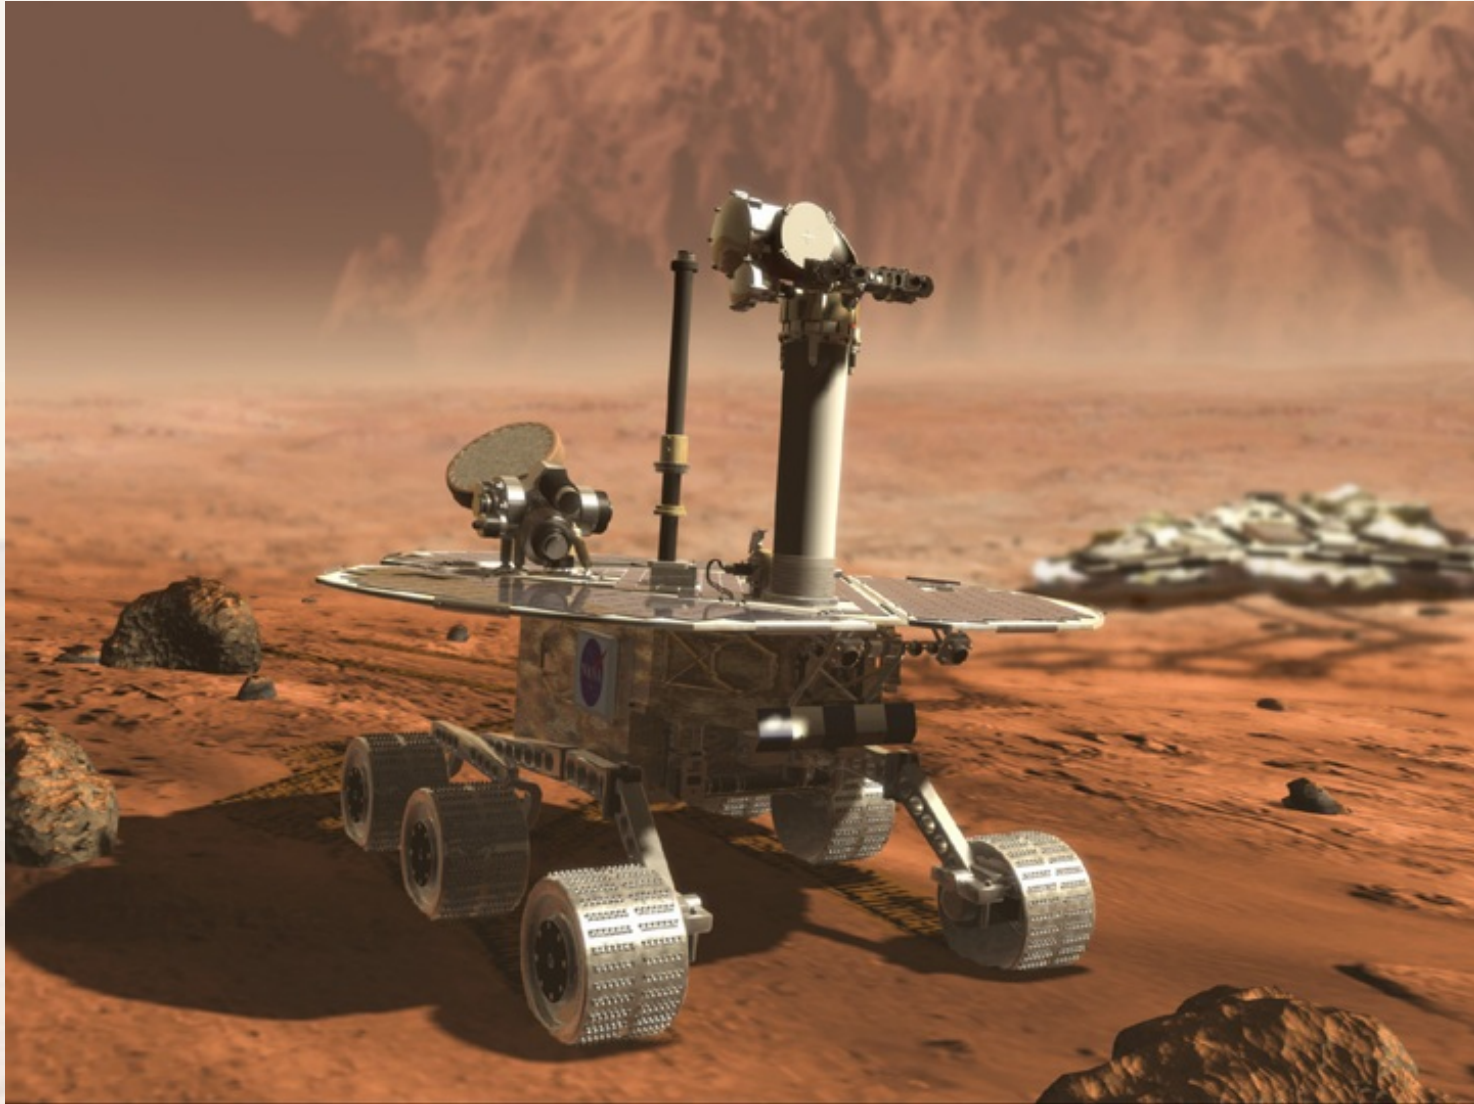


UNIVERSITY OF
MARYLAND

MER Systems

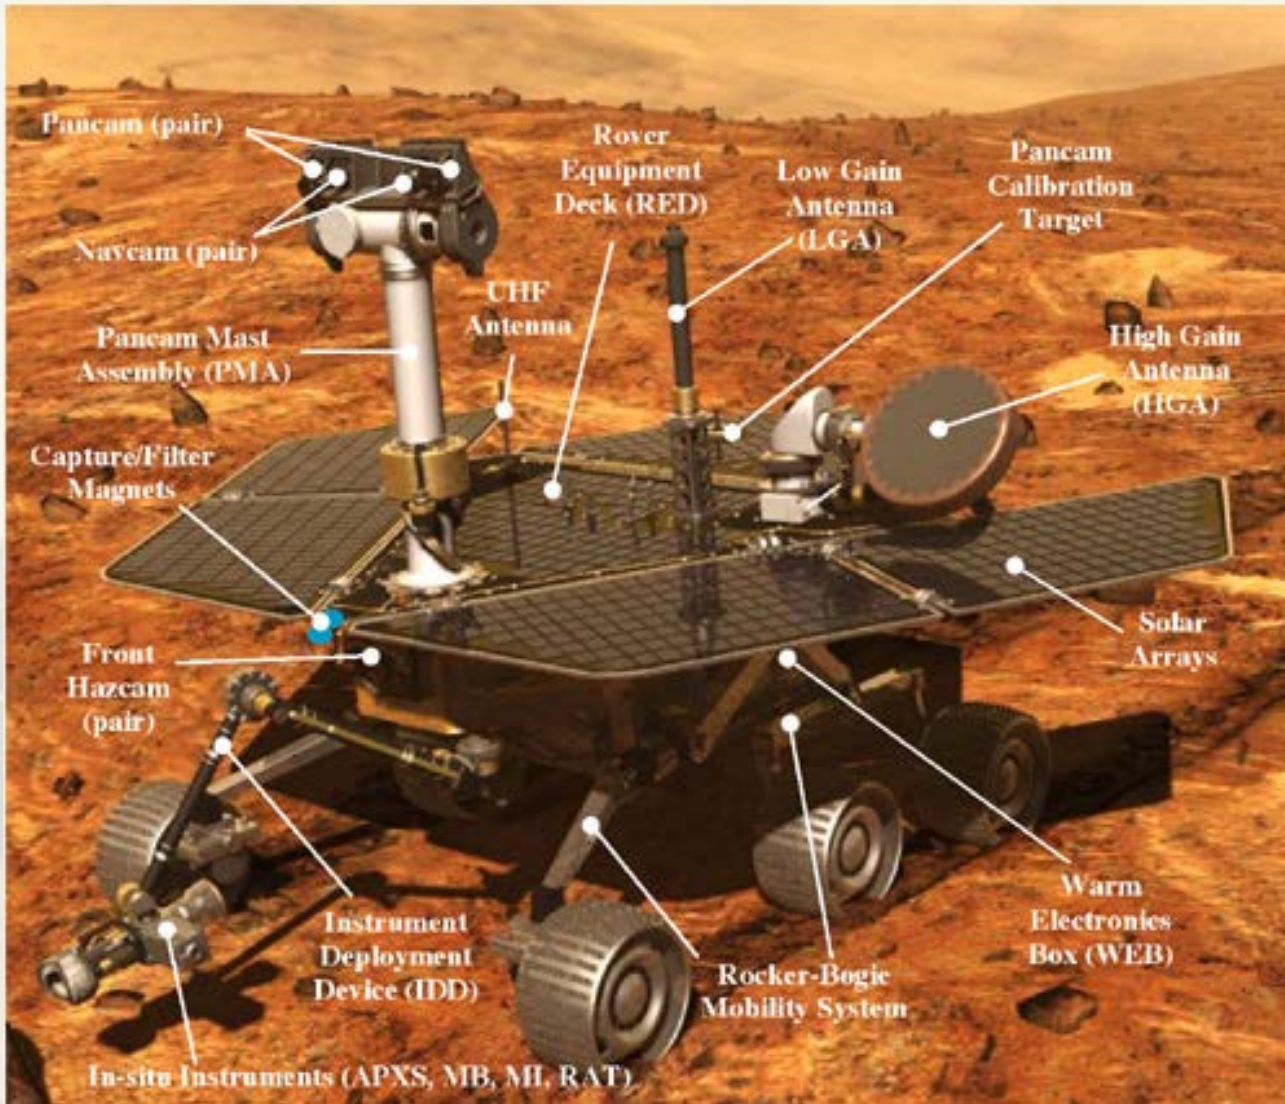



MER Warm Electronics Box (WEB)

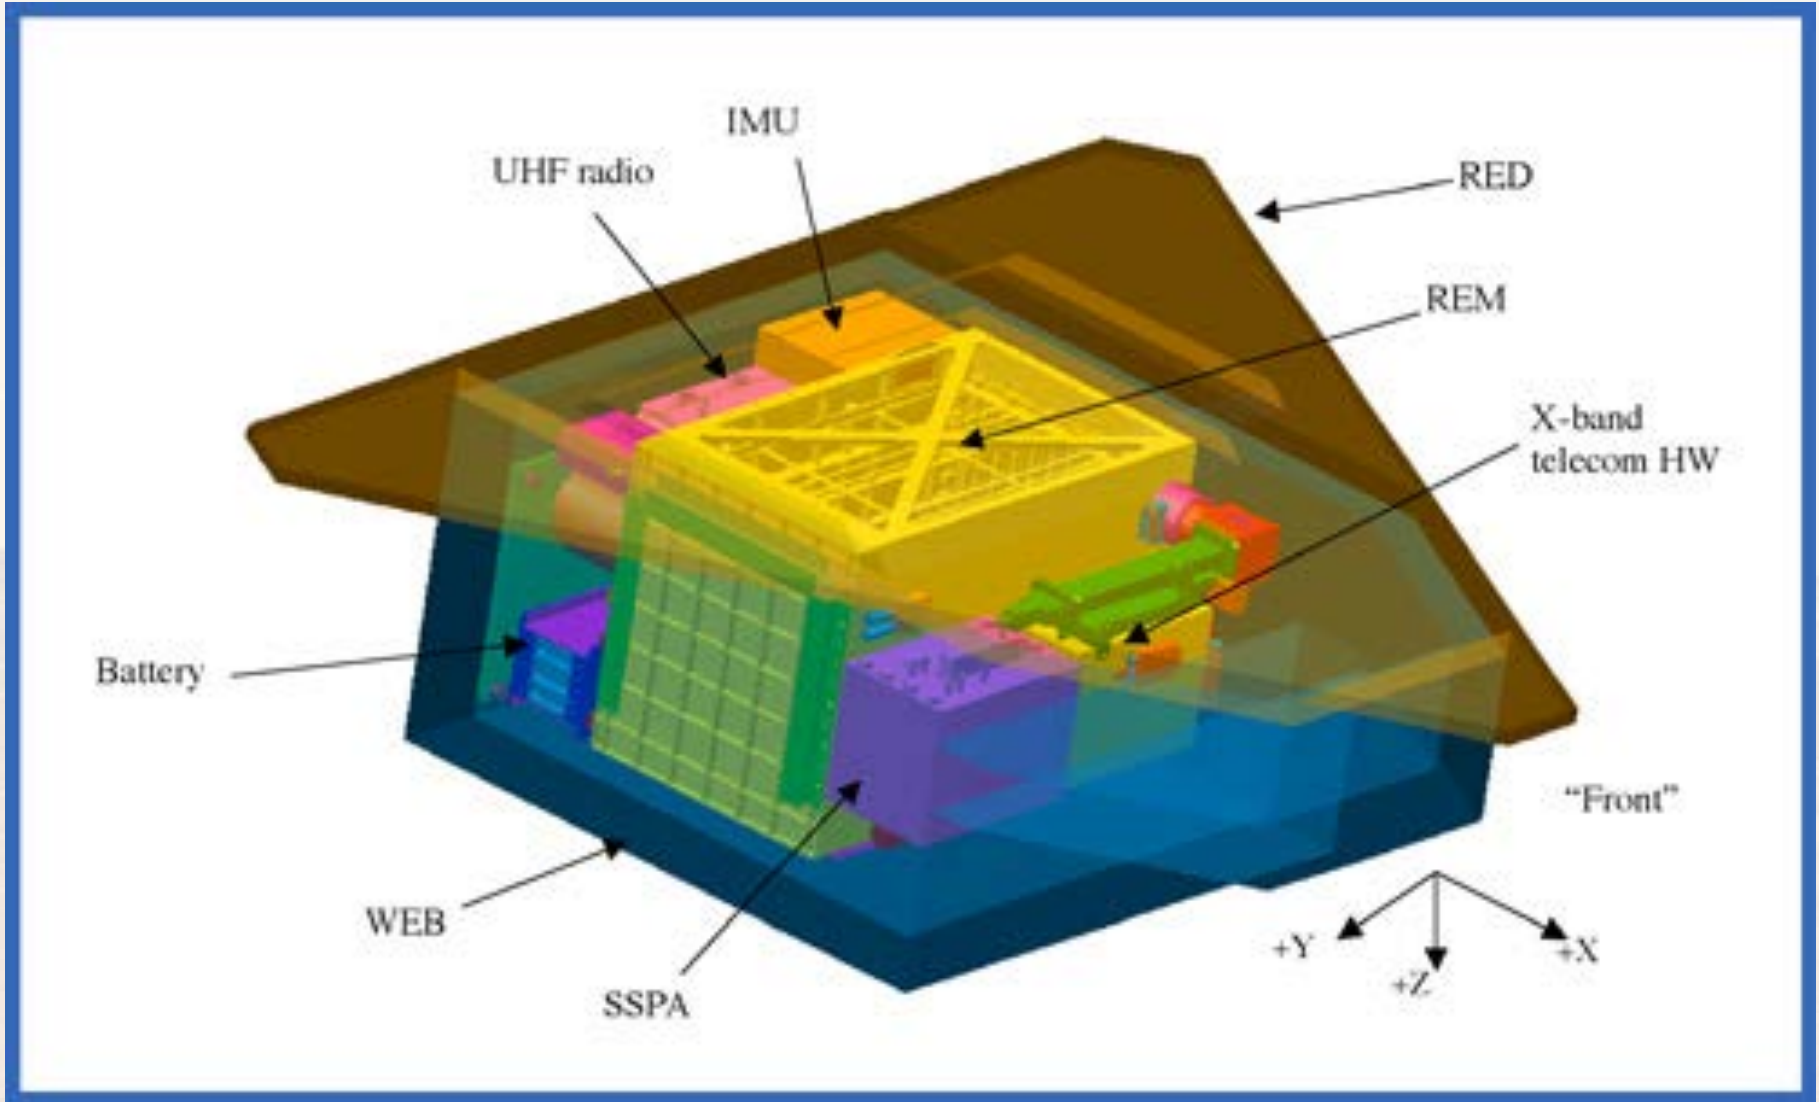



MER WEB at Start of ATLO



MER Mast

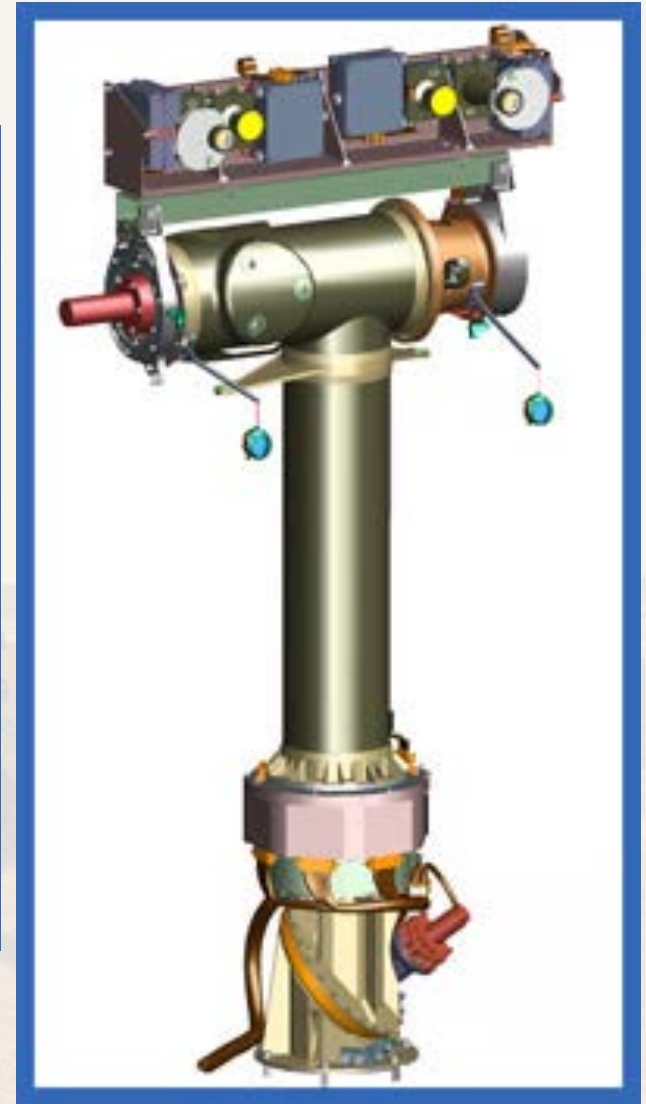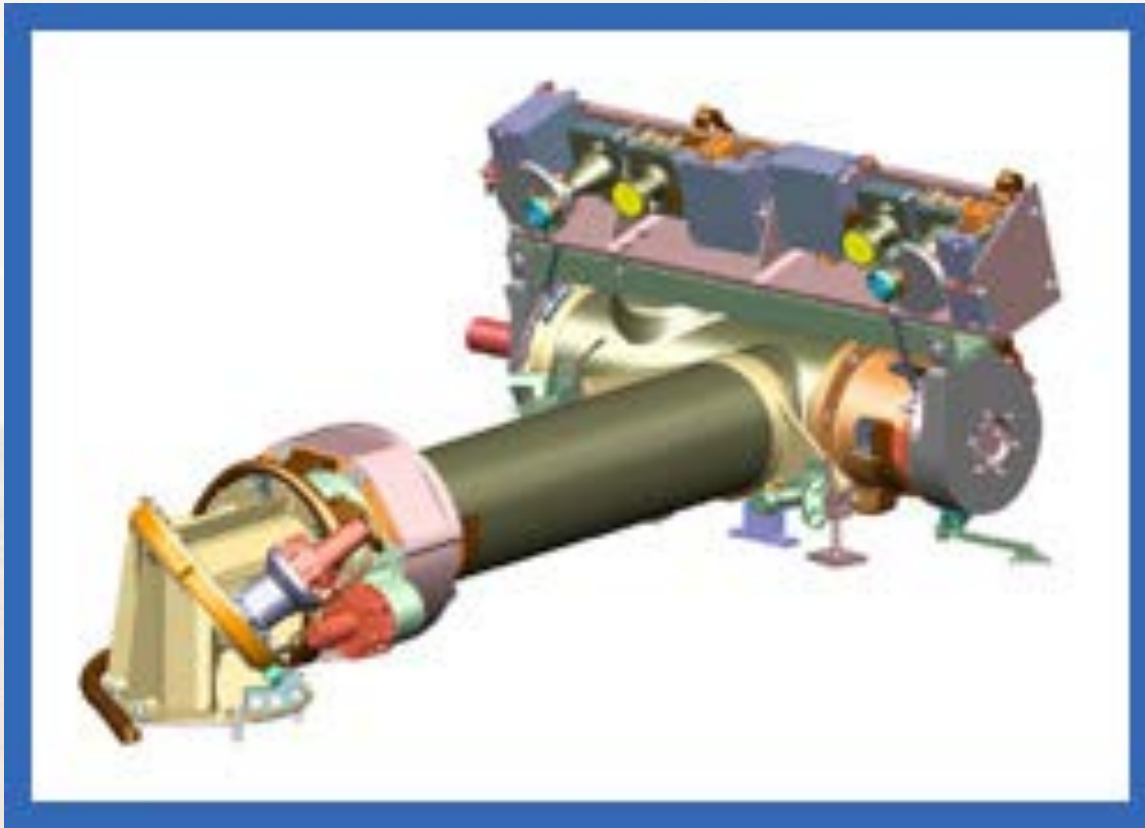


Mars Pathfinder Obstacle Detection

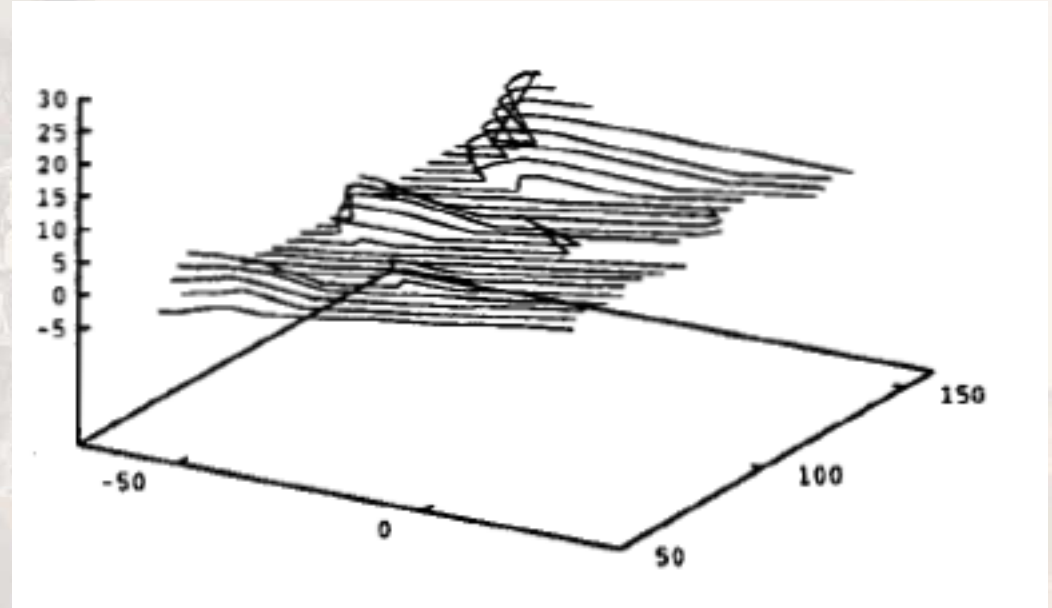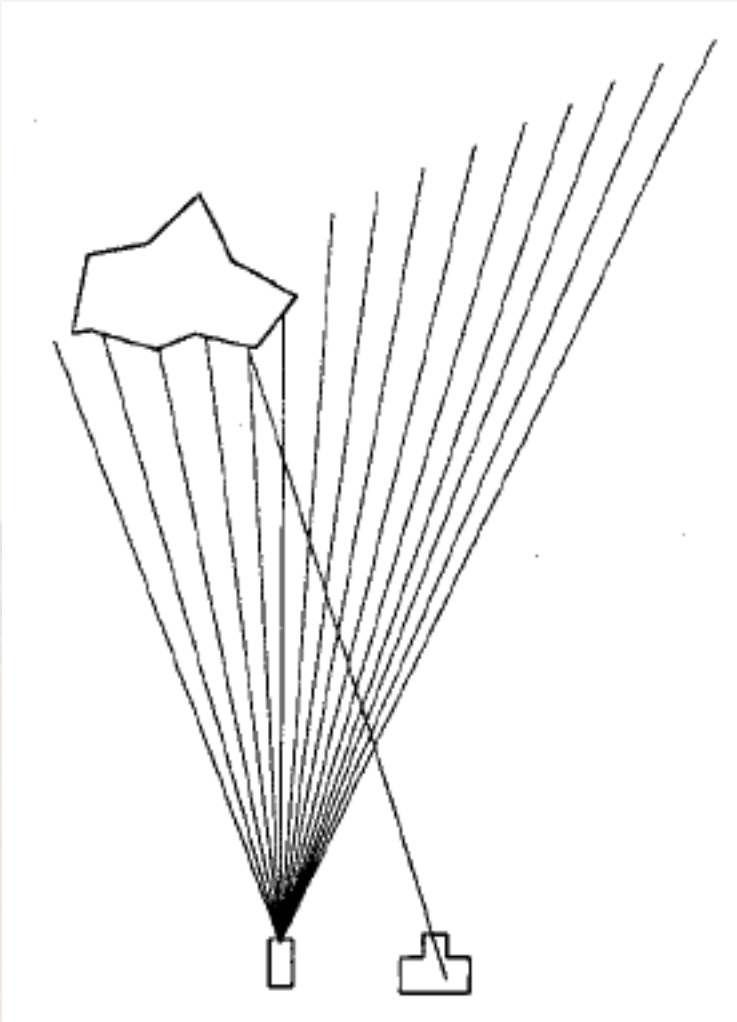

Larry Matthies, Tucker Balch, and Brian Wilcox, "Fast Optical Hazard Detection for Planetary Rovers using Multiple Spot Laser Triangulation" 1997 IEEE International Conference on Robotics and Automation, Albuquerque, NM



MER Camera Systems

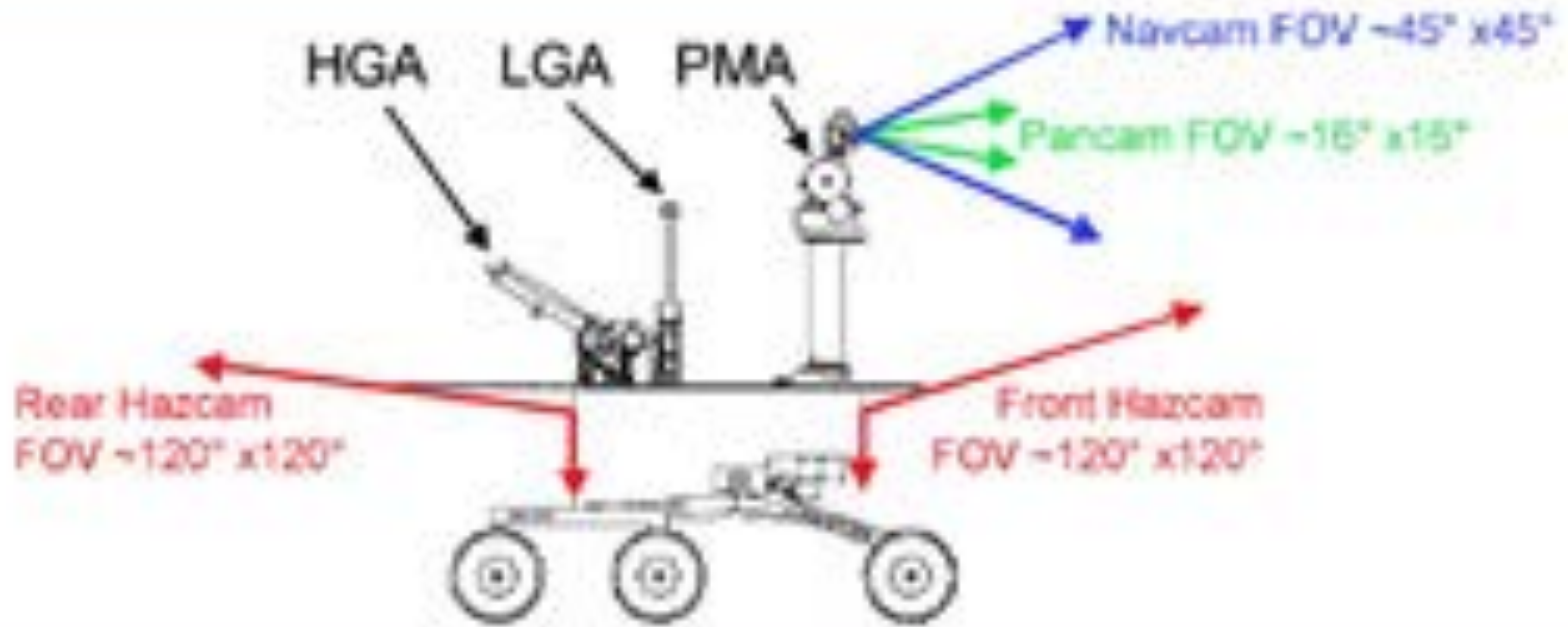




Wheels and IDD



MER Wheel Suspension and Treads




Instrument Deployment Device

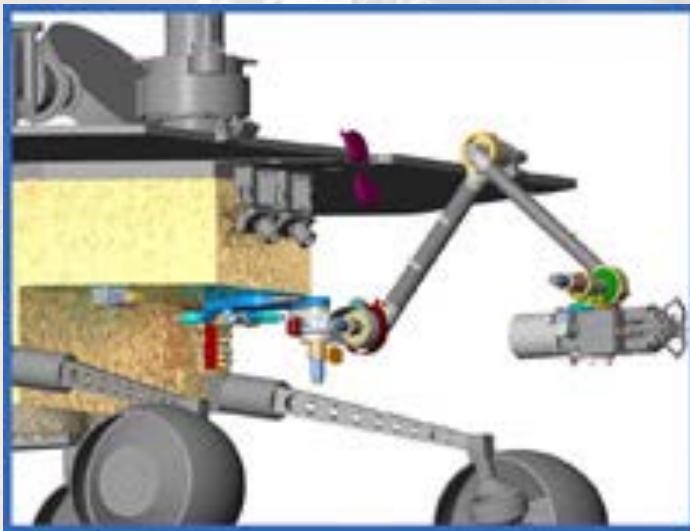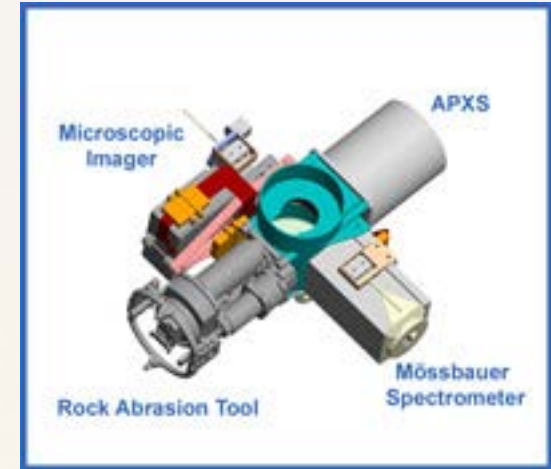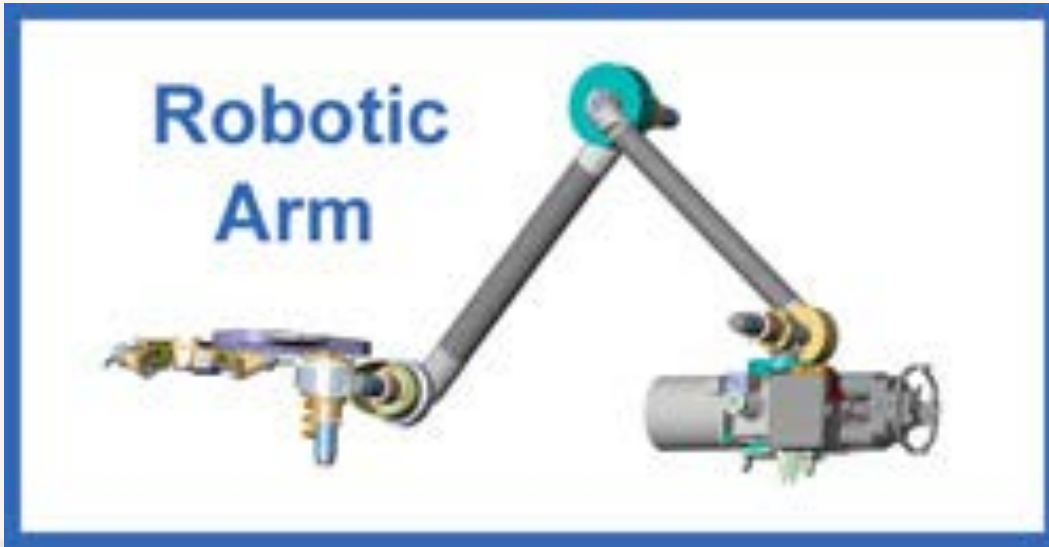


When RATs Go Bad...




Rocker-Bogey Suspension (side view)

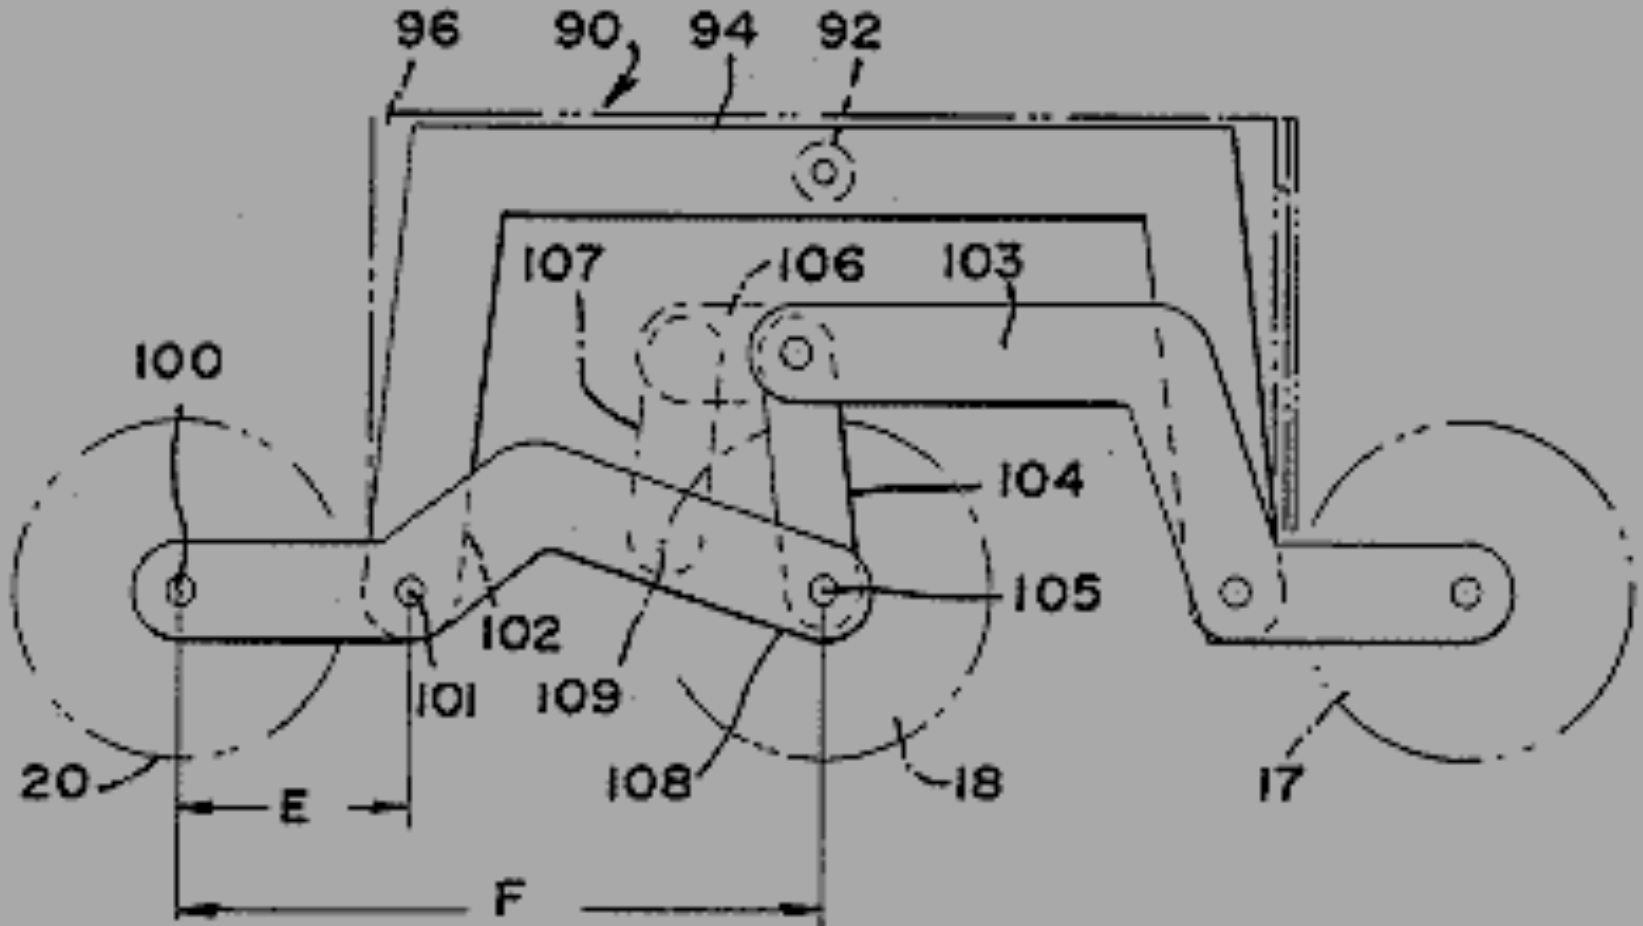

Rocker-Bogey Suspension (isometric)

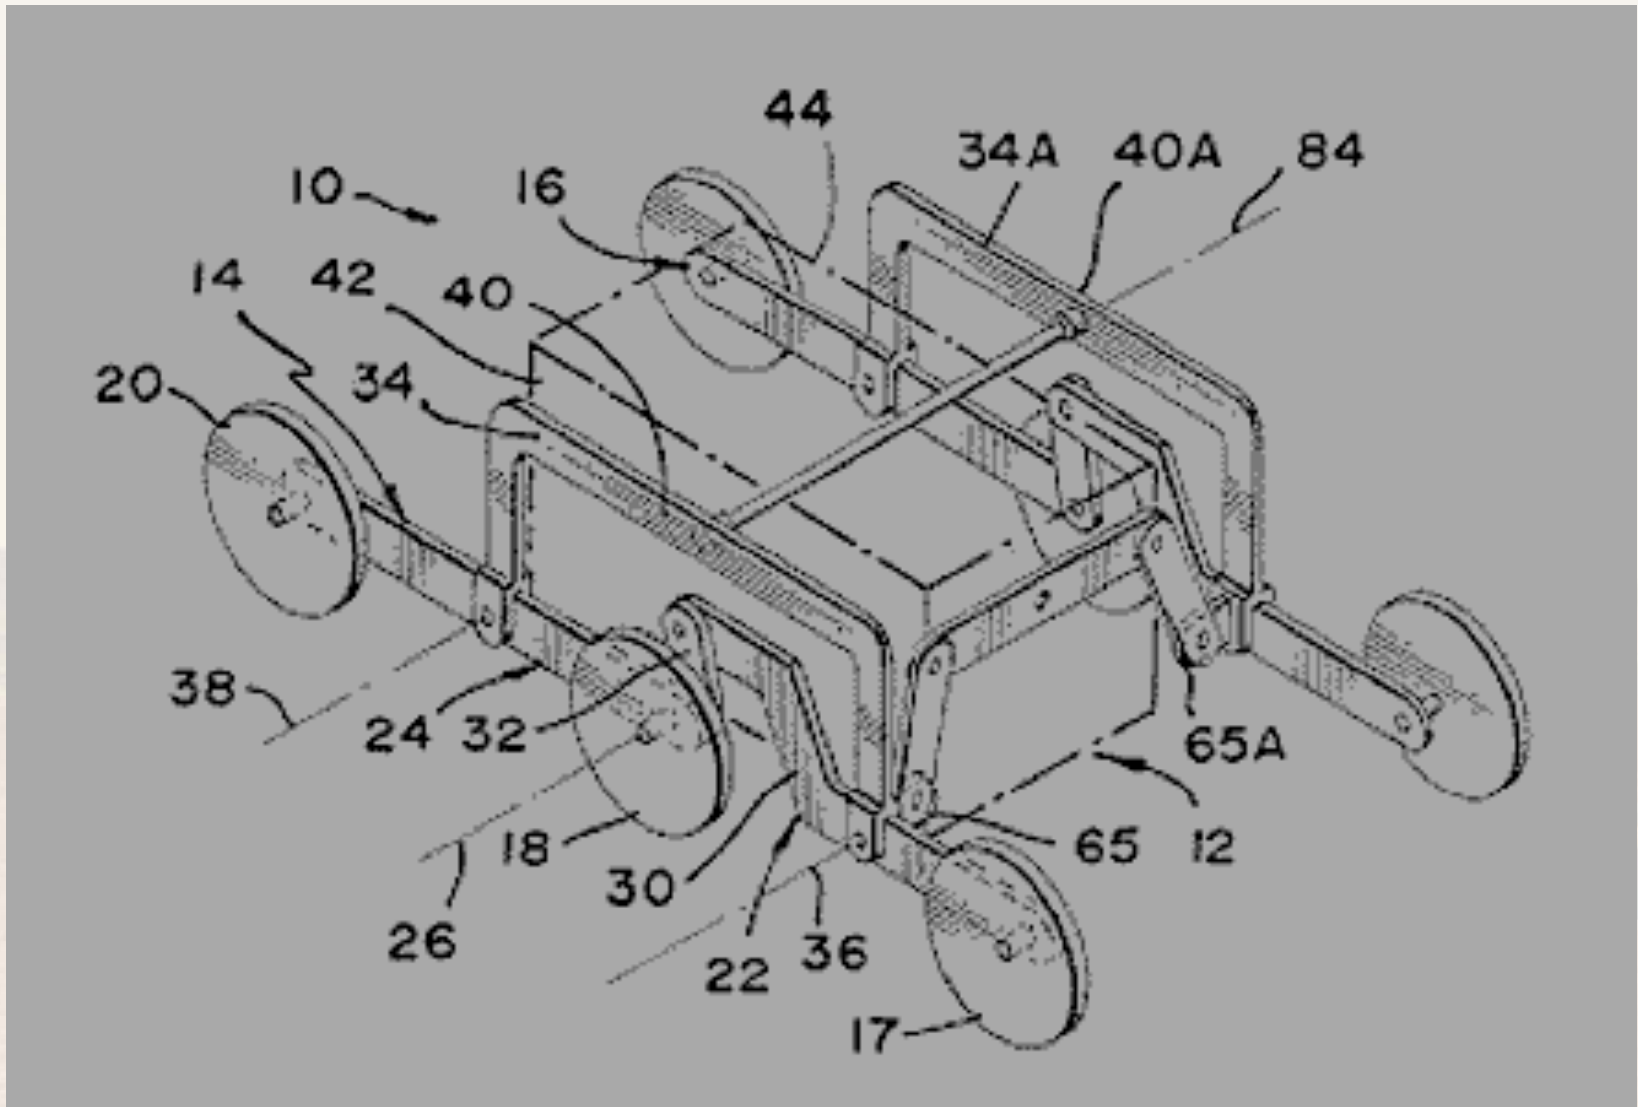

Rocker-Bogey in Action (Rocky 4)

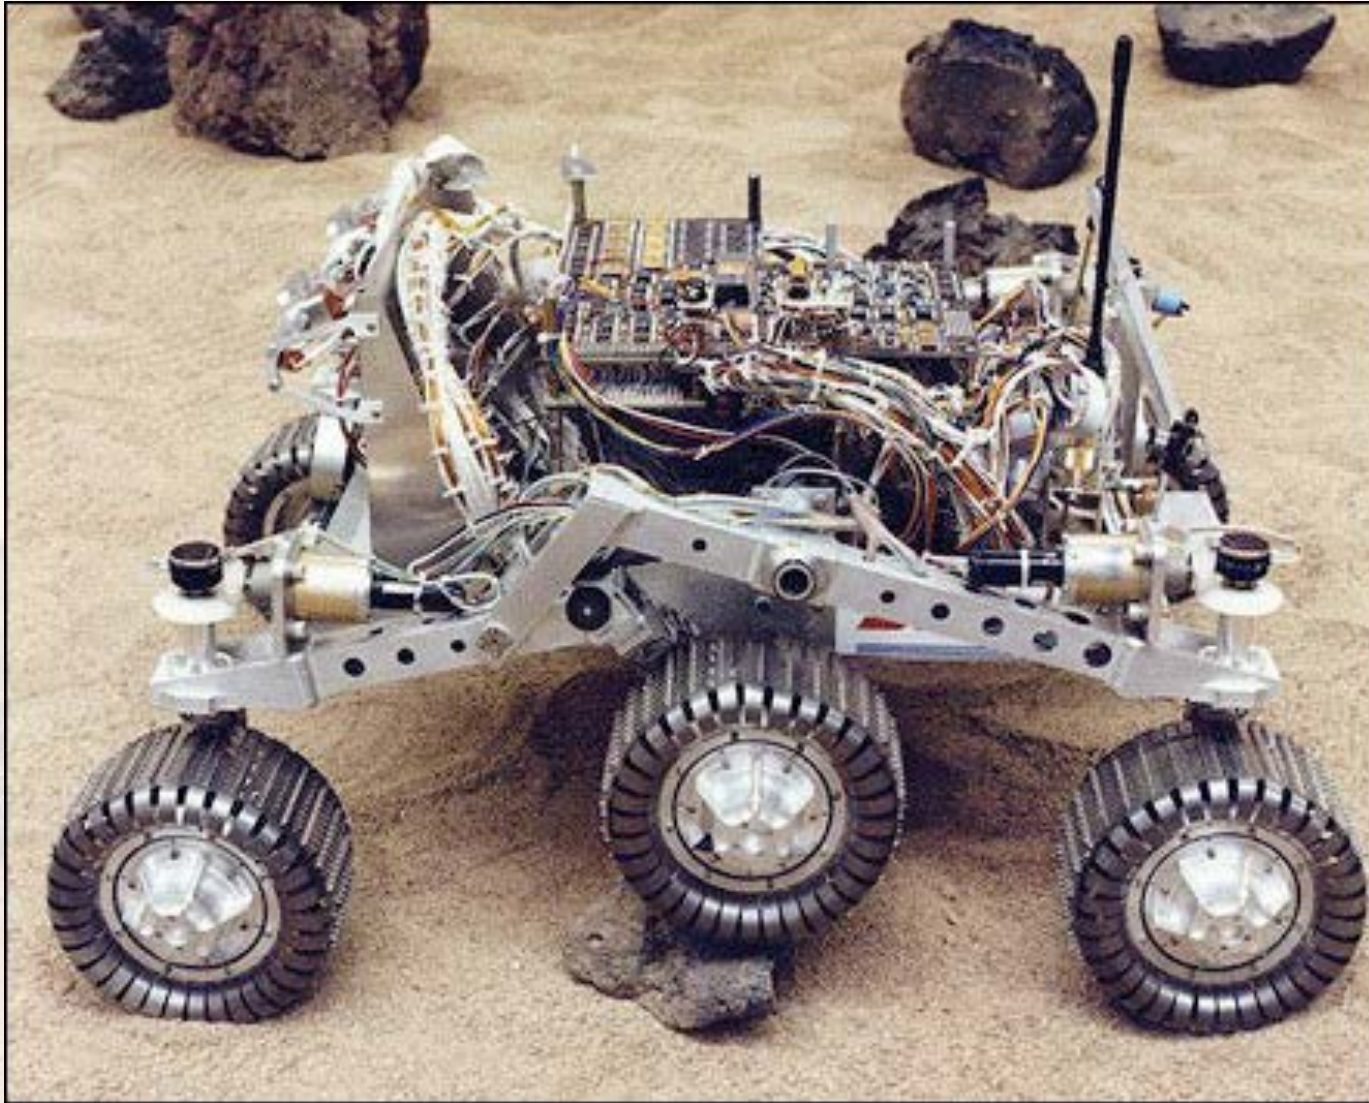

MER Wheel Design



FLYING HIGH Chris Baker, Next Intent's manufacturing manager, displays one of the now-famous wheels, each of which is made out of a single piece of airplane-quality aluminum.



Spirit Lands in Gusev Crater




UNIVERSITY OF
MARYLAND

Spirit Looks Towards Columbia Hills




Opportunity Lands in Eagle Crater

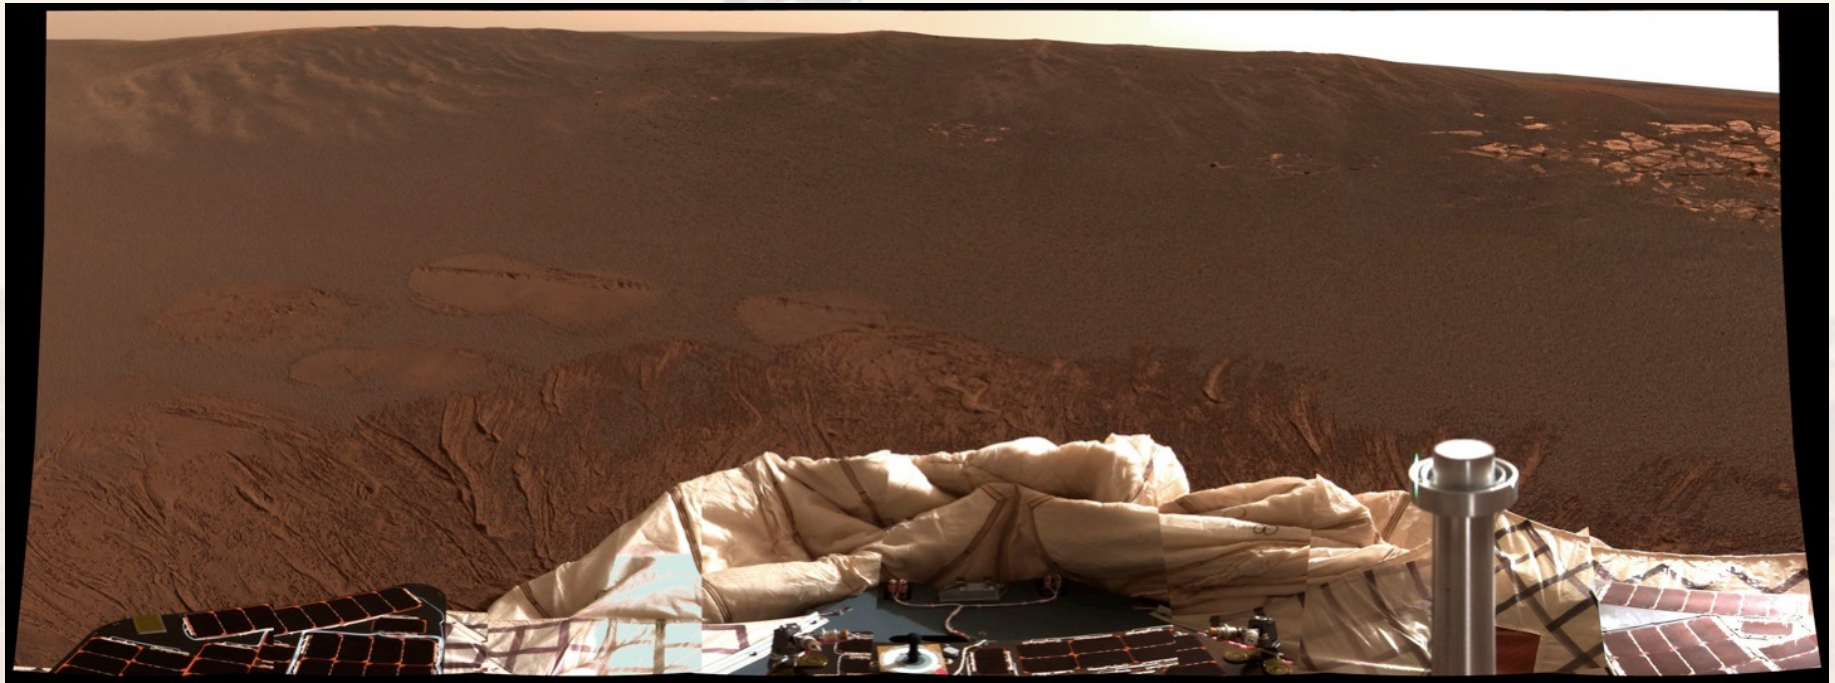


UNIVERSITY OF
MARYLAND


Opportunity Landing Targeting

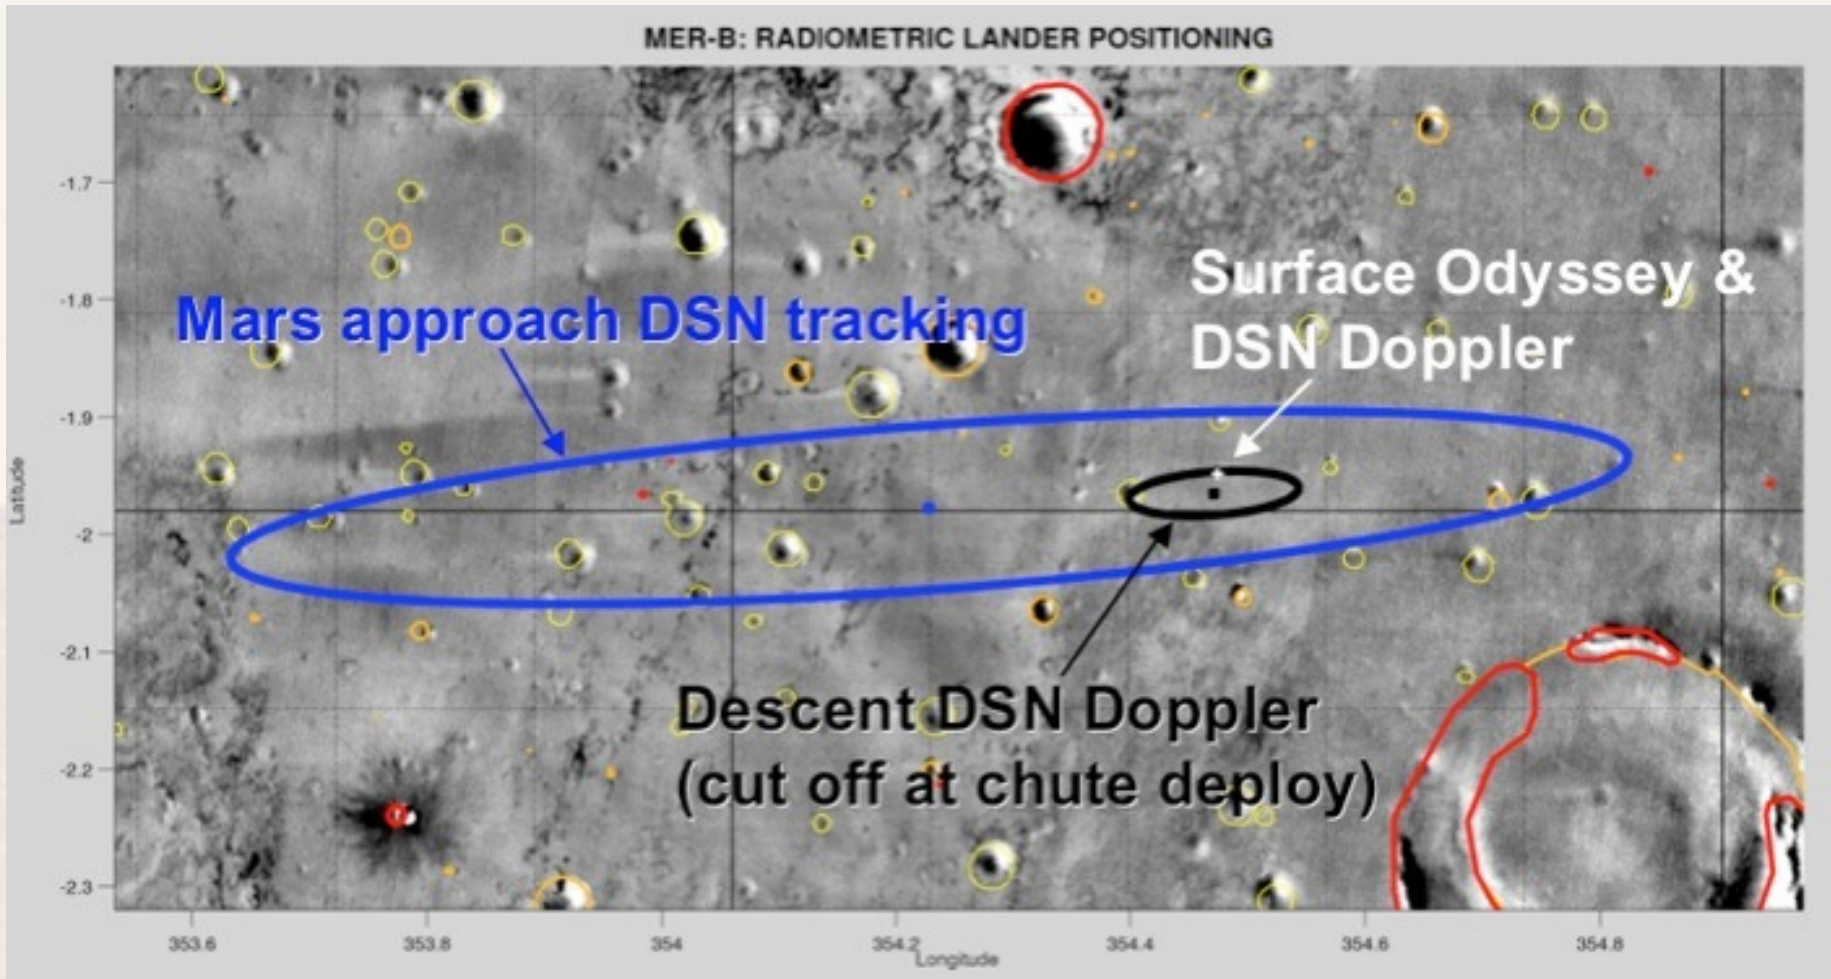


Sometimes the Bounces Go Your Way...

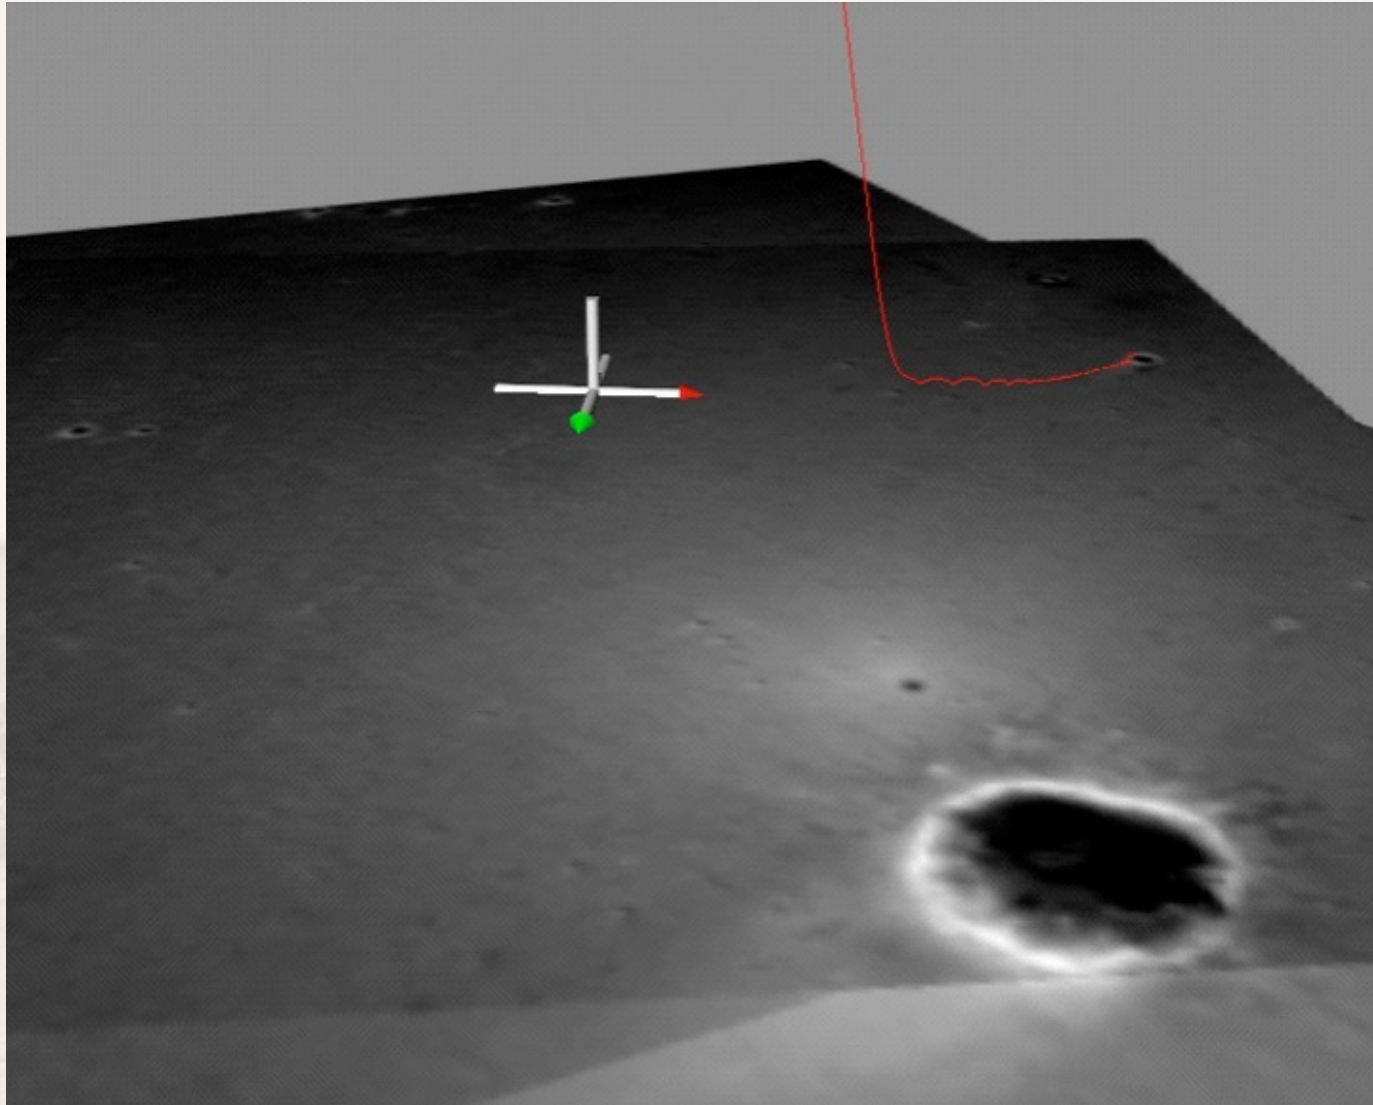


...Opportunity Scores a Hole in One

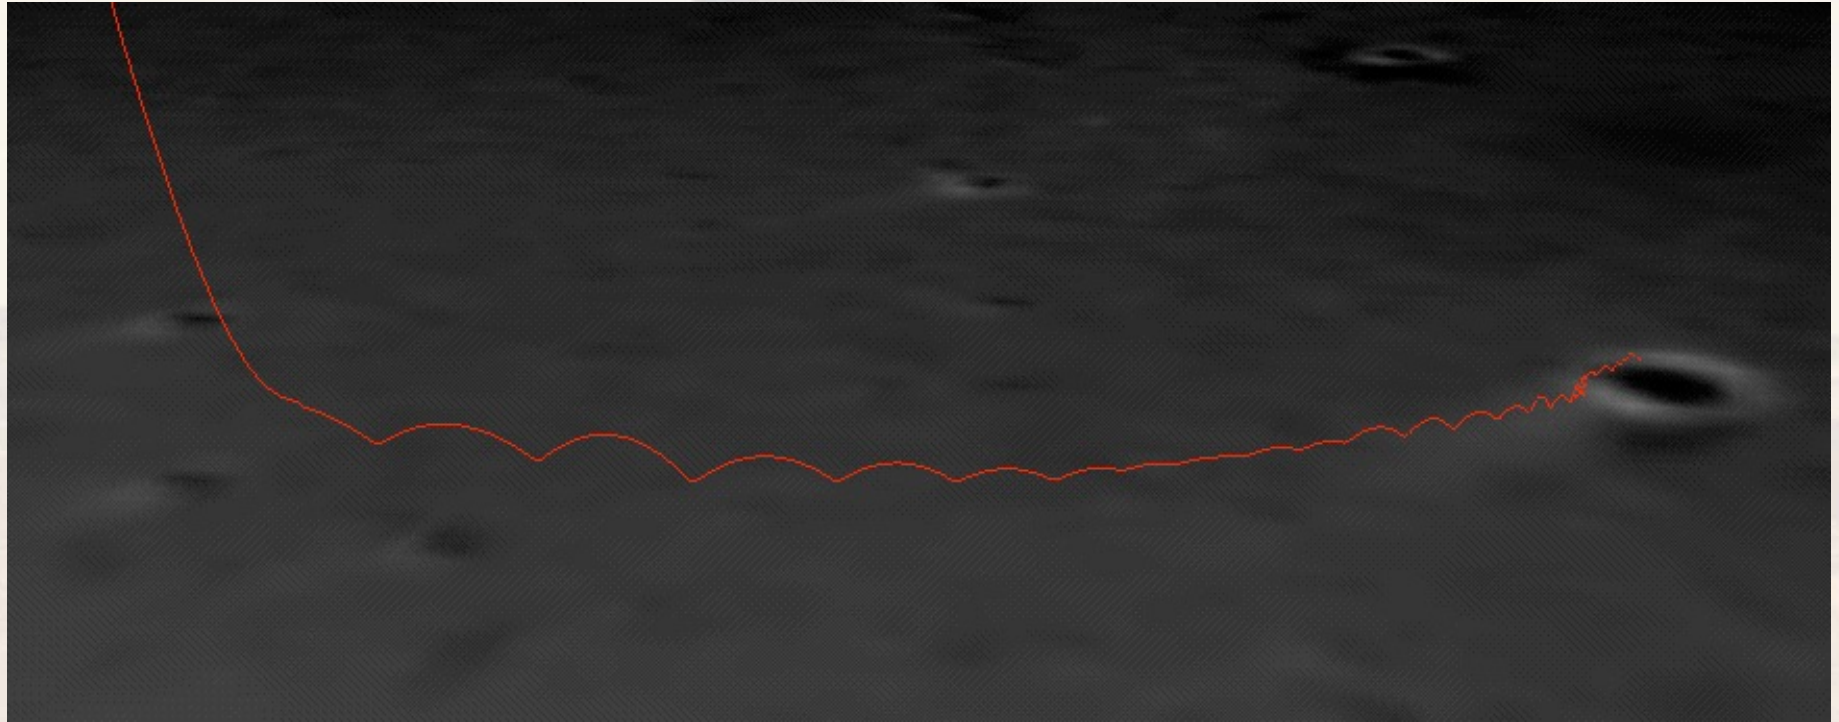

Opportunity at Endurance Crater

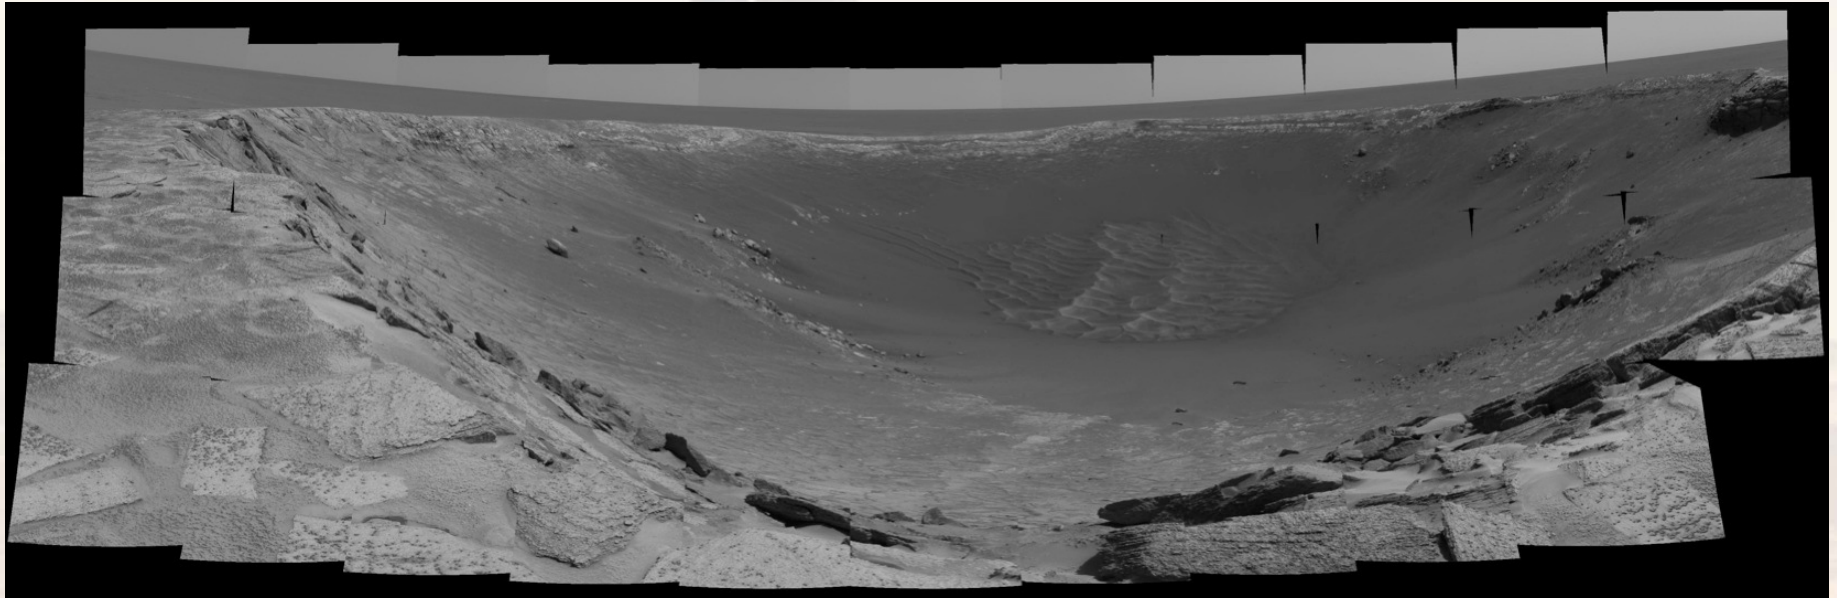

Mini-TES Map of Hematite

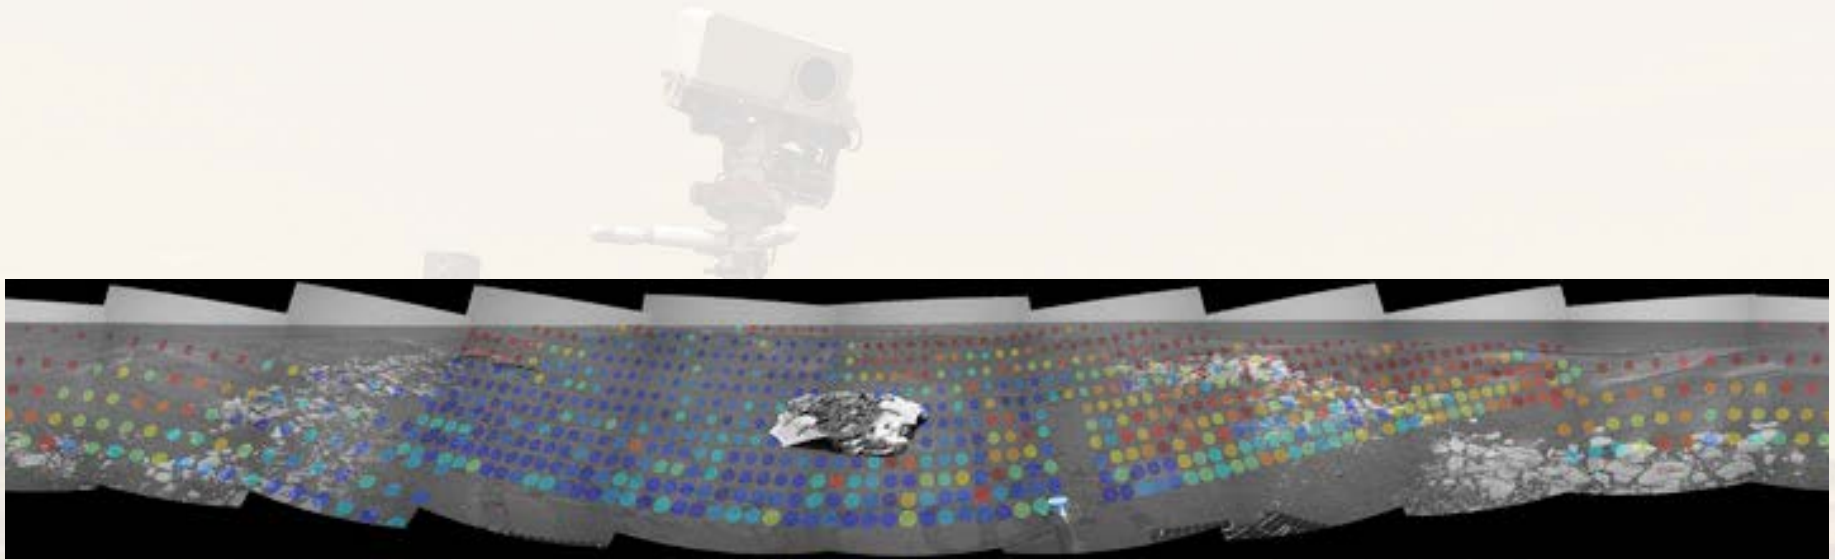


Instrument Deployment Device



UNIVERSITY OF
MARYLAND

Instruments on the End of IDD

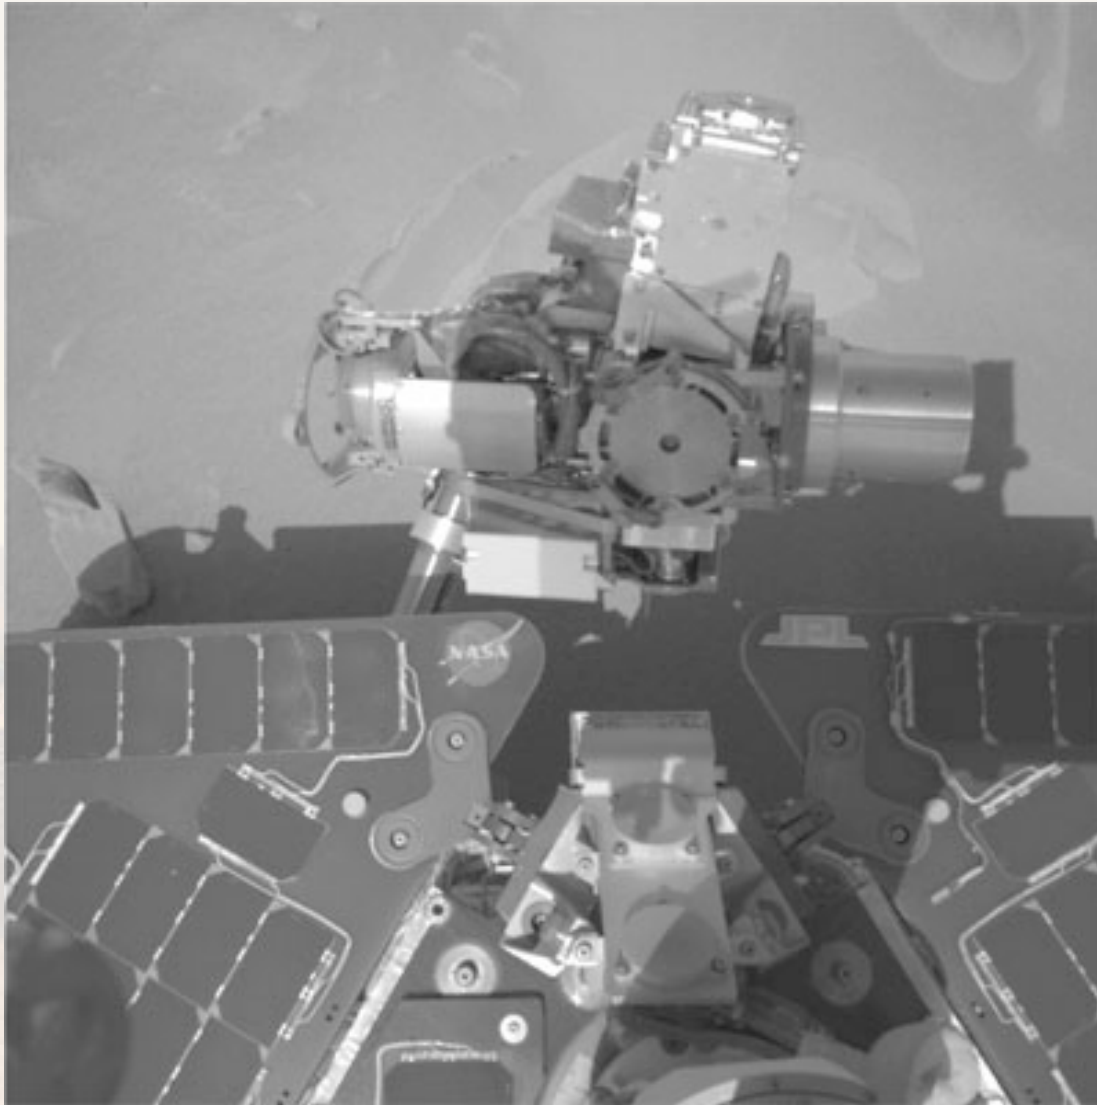


RATting the Rocks




UNIVERSITY OF
MARYLAND

Opportunity Finds Blueberries

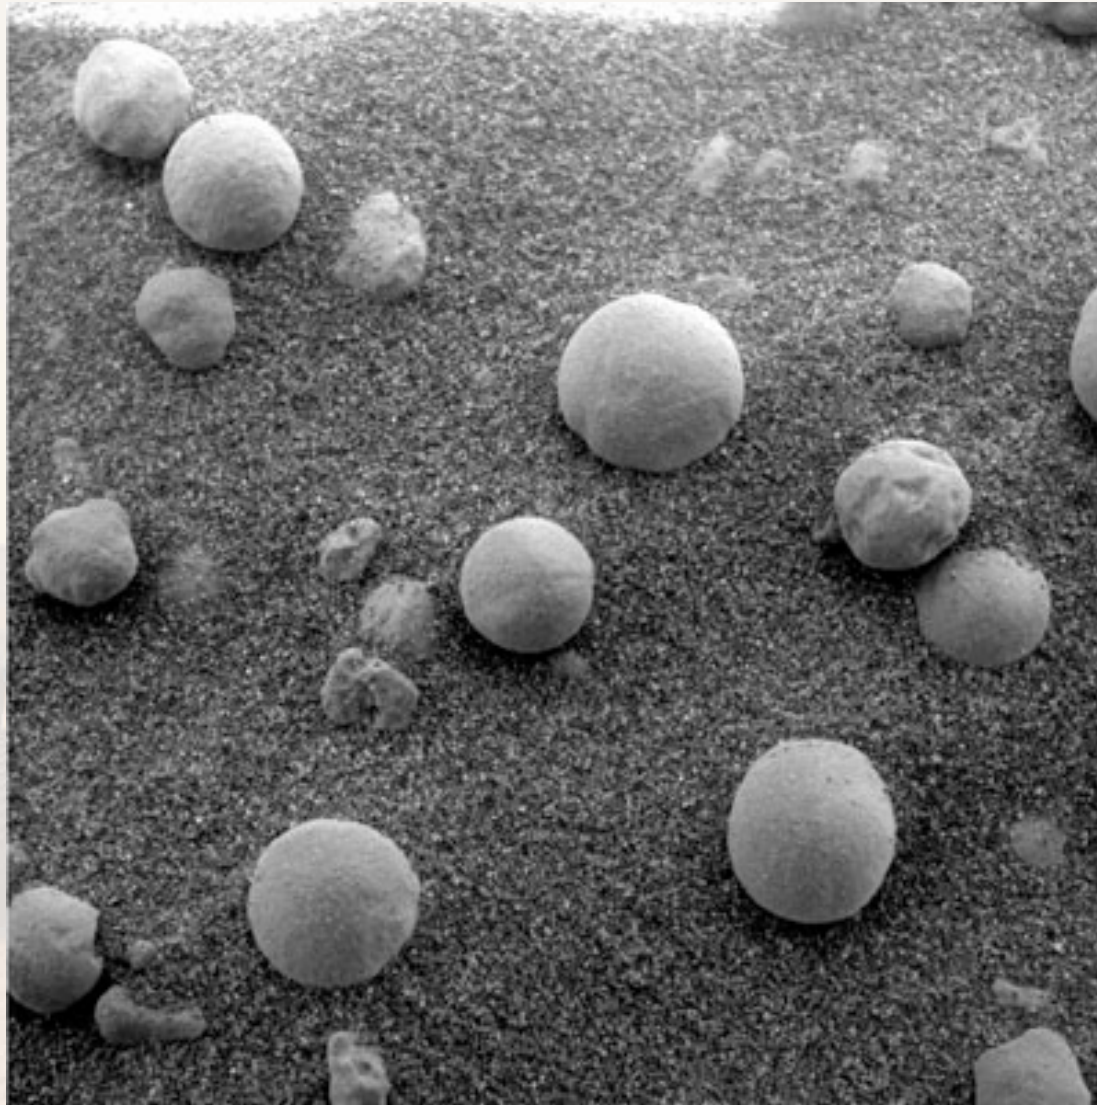

UNIVERSITY OF
MARYLAND

Burns Cliff (inside Endurance Crater)

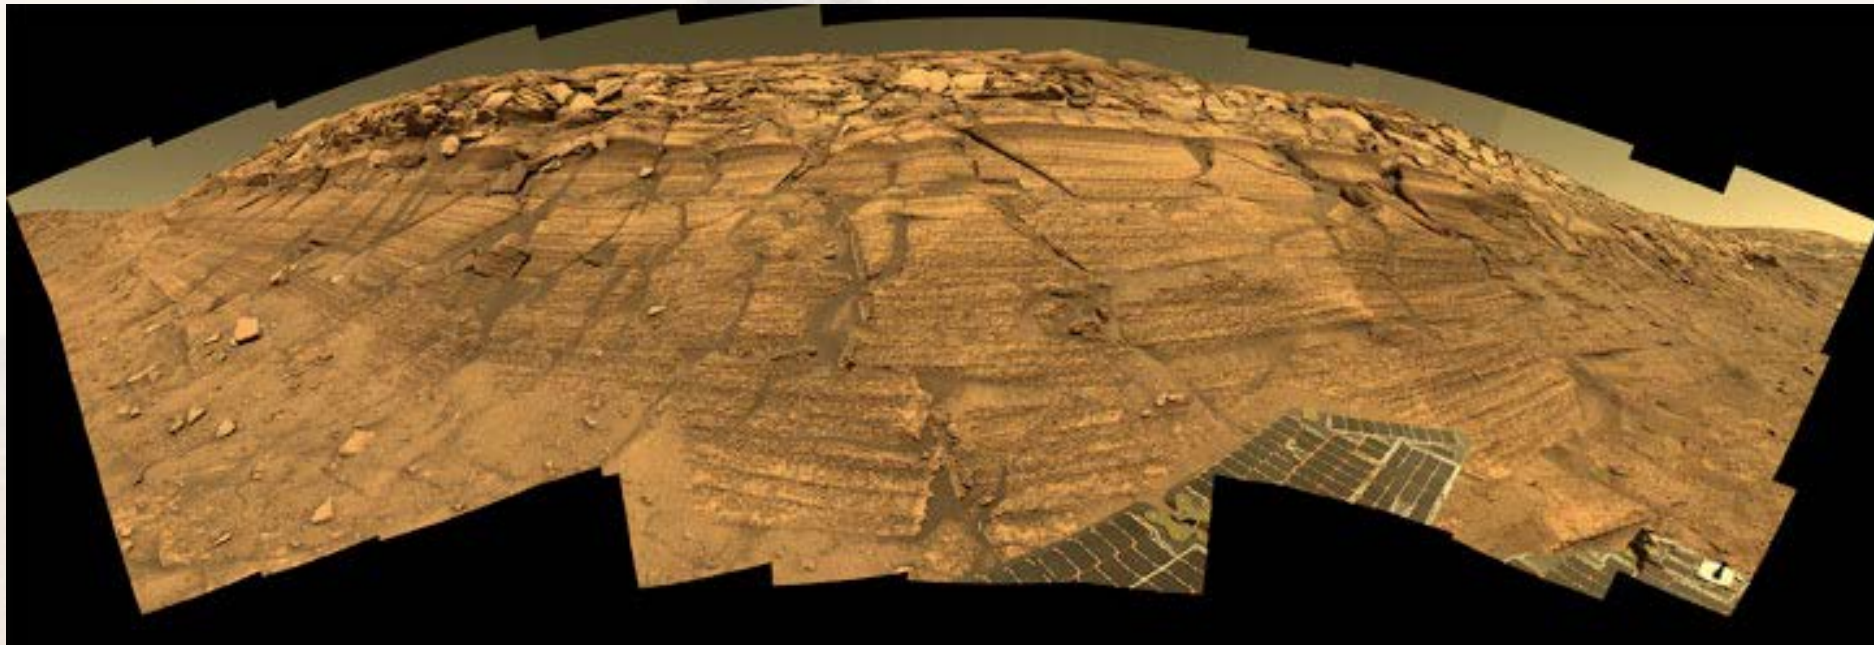

The Floor of Endurance Crater



UNIVERSITY OF
MARYLAND

Odyssey Finds its Heat Shield...




...and Something Else Unexpected



Opportunity Self-Portrait



Spirit Self-Portrait

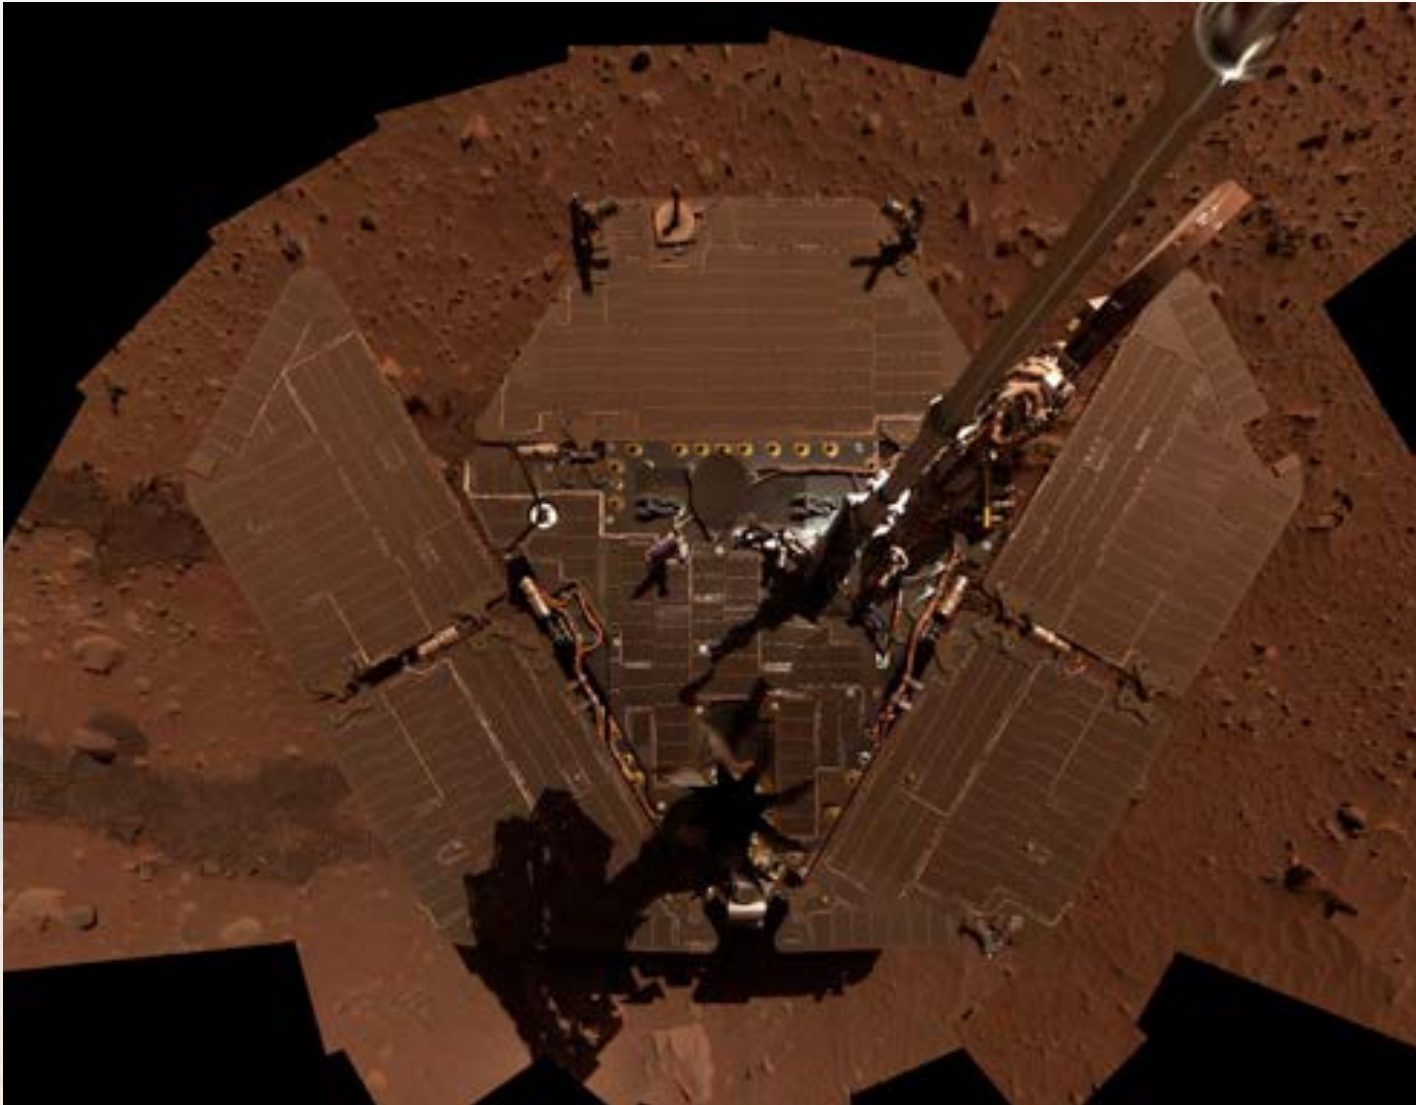

Mars Rover Evolution




Three Generations of Mars Wheels



Mars Science Lander 2009 Concept




UNIVERSITY OF
MARYLAND

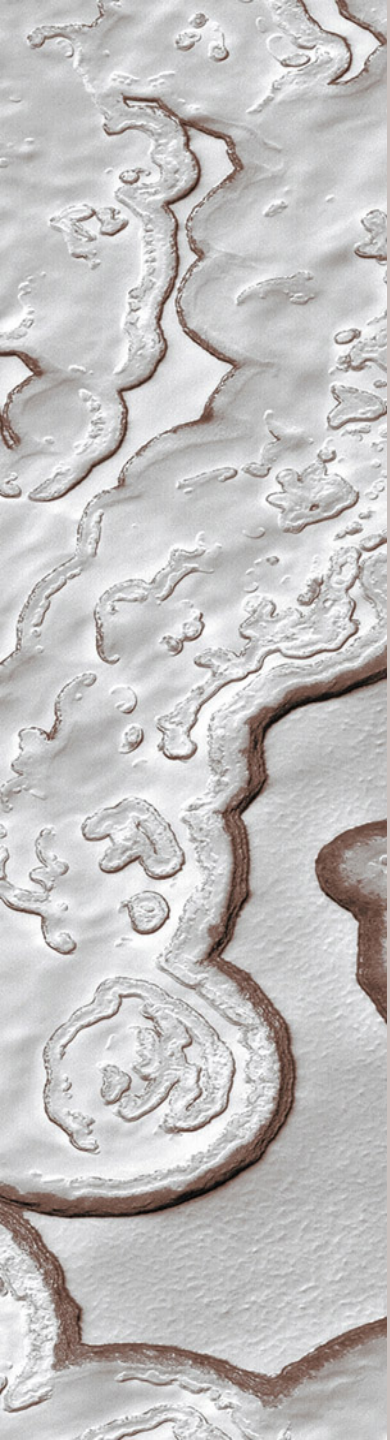

Mars Science Laboratory Project Introduction

Richard Cook
Project Manager

December 7, 2005



Project Objectives



Project Overview

Salient Features


Mobile Science Laboratory

***One Mars Year surface operational
lifetime (669 sols/687 days)***

***Discovery Responsive over wide range of
latitudes and altitudes***

Controlled Propulsive Landing

Precision Landing via Guided Entry

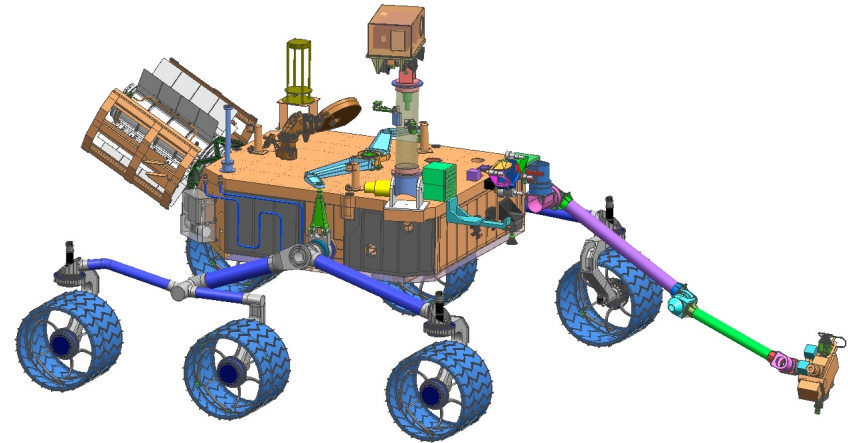

Science

Mission science will focus on Mars habitability

Next generation analytical laboratory science investigations

Remote sensing/contact investigations

Suite of Environmental Monitoring Instruments



Science Objectives

1. Characterization of geological features, contributing to deciphering geological history and the processes that have modified rocks and regolith, including the role of water;
2. Determination of the mineralogy and chemical composition (including an inventory of elements such as C, H, N, O, P, S, etc. known to be building blocks for life) of surface and near-surface materials;
3. Determination of energy sources that could be used to sustain biological processes;
4. Characterization of organic compounds and potential biomarkers in representative regolith, rocks, and ices;
5. Determination the stable isotopic and noble gas composition of the present-day bulk atmosphere;
6. Identification potential bio-signatures (chemical, textural, isotopic) in rocks and regolith;
7. Characterization of the broad spectrum of surface radiation, including galactic cosmic radiation, solar proton events, and secondary neutrons; and
8. Characterization of the local environment, including basic meteorology, the state and cycling of water and CO₂, and the near-surface distribution of hydrogen.



Technology Objectives

1. demonstration of improved landing precision through the use of guided entry; and
2. demonstration of a landing system capable of accessing a significant fraction of the surface of Mars.



Level 1 Requirements (1 of 2)

- The project shall launch a mobile surface mission to Mars during the 2009 opportunity from the Eastern Test Range
- The project shall deliver a flight system to be launched on a launch vehicle competitively selected under the NASA Launch Services contract compatible with both Atlas 5 and Delta IV intermediate-class launch vehicles.
- The project system shall be able to land at altitudes of up to +2.0 km relative to the MOLA aeroid.
- The project system shall be capable of landing and operating at sites between 60°N and 60°S latitude selected as late as one year before launch without compromising overall mission safety.
- The project system shall be able to land with an error of 10 km or less radially from a designated point on the surface of Mars (excluding any uncontrolled effects of winds during parachute descent) utilizing a guided atmospheric entry.
- Accommodate the NASA selected payload.



Level 1 Requirements (2 of 2)

- The project system shall provide data communication throughout critical events at a rate sufficient to determine the state of the spacecraft in support of fault reconstruction to relay assets provided by the Mars Program or to the Deep Space Network.
- The project system shall acquire scientific data about the rover's local region and conduct mobile in-situ analysis with the rover and its scientific payload on the surface of Mars for at least one martian year.
- The project shall deliver to Mars a rover with the capability of a total traverse path length of at least 20 km.
- The project system shall be able to select, acquire, process, distribute, and analyze at least 74 samples of rock, rock fragments, and/or regolith.
- The project shall conduct near real-time public release of imagery and other science/technology data via the Internet and will provide regular releases for public information purposes.



Threshold L1 Requirements (1 of 2)

- The project shall launch a mobile surface mission to Mars during the 2009 opportunity from the Eastern Test Range
- The project shall deliver a flight system to be launched on a launch vehicle competitively selected under the NASA Launch Services contract compatible with both Atlas 5 and Delta IV intermediate-class launch vehicles.
- The project system shall be able to land at altitudes of up to +1.5 km relative to the MOLA areoid.
- The project system shall be capable of landing and operating at sites between 45°N and 45°S latitude selected as late as one year before launch without compromising overall mission safety.
- The project system shall be able to land with an error of 20 km or less radially from a designated point on the surface of Mars (excluding any uncontrolled effects of winds during parachute descent) utilizing a guided atmospheric entry.
- The project shall accommodate the NASA selected payload specified in Section 4.2. Any change in this complement would take into consideration the ability of the remaining payload complement to meet the threshold of the first three science goals (described in Section 2.1) and the mission success criteria (described in Section 4.3).



Threshold L1 Requirements (2 of 2)

- The project system shall provide data communication throughout critical events at a rate sufficient to determine the state of the spacecraft in support of fault reconstruction to relay assets provided by the Mars Program or to the Deep Space Network.
- The project system shall acquire scientific data about the rover's local region and conduct mobile in-situ analysis with the rover and its scientific payload on the surface of Mars for at least 335 sols.
- The project shall deliver to Mars a rover with the capability of a total traverse path length of at least 10 km.
- The project system shall be able to select, acquire, process, distribute, and analyze at least 28 samples of rock, rock fragments, and/or regolith.
- The project shall conduct near real-time public release of imagery and other science/technology data via the Internet and will provide regular releases for public information purposes.



Mission Success Criteria (1 of 2)

- Land safely on the surface of Mars
- Provide mobility capability of at least 50m/sol on the surface of Mars any day requested (monthly average)
- Periodically archive a copy of verified, validated, and calibrated data acquired by the mission to the Planetary Data System within six months after receipt of data on Earth.



Mission Success Criteria (2 of 2)

- Characterize the landing region by conducting the following sets of investigations at levels equal to or above those necessary to fulfill their science objectives for 335 sols after landing; (Note that the balance of actual utilization of the various instruments will depend on the nature of the materials and environments actually encountered on the surface of Mars and evaluation of each instrument's usefulness in the context of the scientific opportunities as they evolve during the mission);
 - Remote imaging for target identification and navigation with one of the two stereoscopic imaging systems (Mastcam or engineering Navigation Cameras), and,
 - Microscopic imaging with one of the two available instruments (MAHLI or Chemcam RMI), and,
 - Chemical composition analysis with one of two available instruments (APXS or ChemCam LIBS), and,
 - Return data from a total of 28 distinct samples analyzed by either available sample analysis investigation (CheMin and/or SAM)




Project Constraints

- Meet Planetary Protection Category IV-C requirements
- Land at sites selected approximately 1 year before launch
- Complete the Project within the not-to-exceed cost established in the commitment.
- Provide UHF communications capability compatible with existing and planned orbiting assets at Mars, including MRO and Odyssey
- Formulate and implement the Project consistent with the JPL Flight Project Practices and Design Principles



Technical Overview

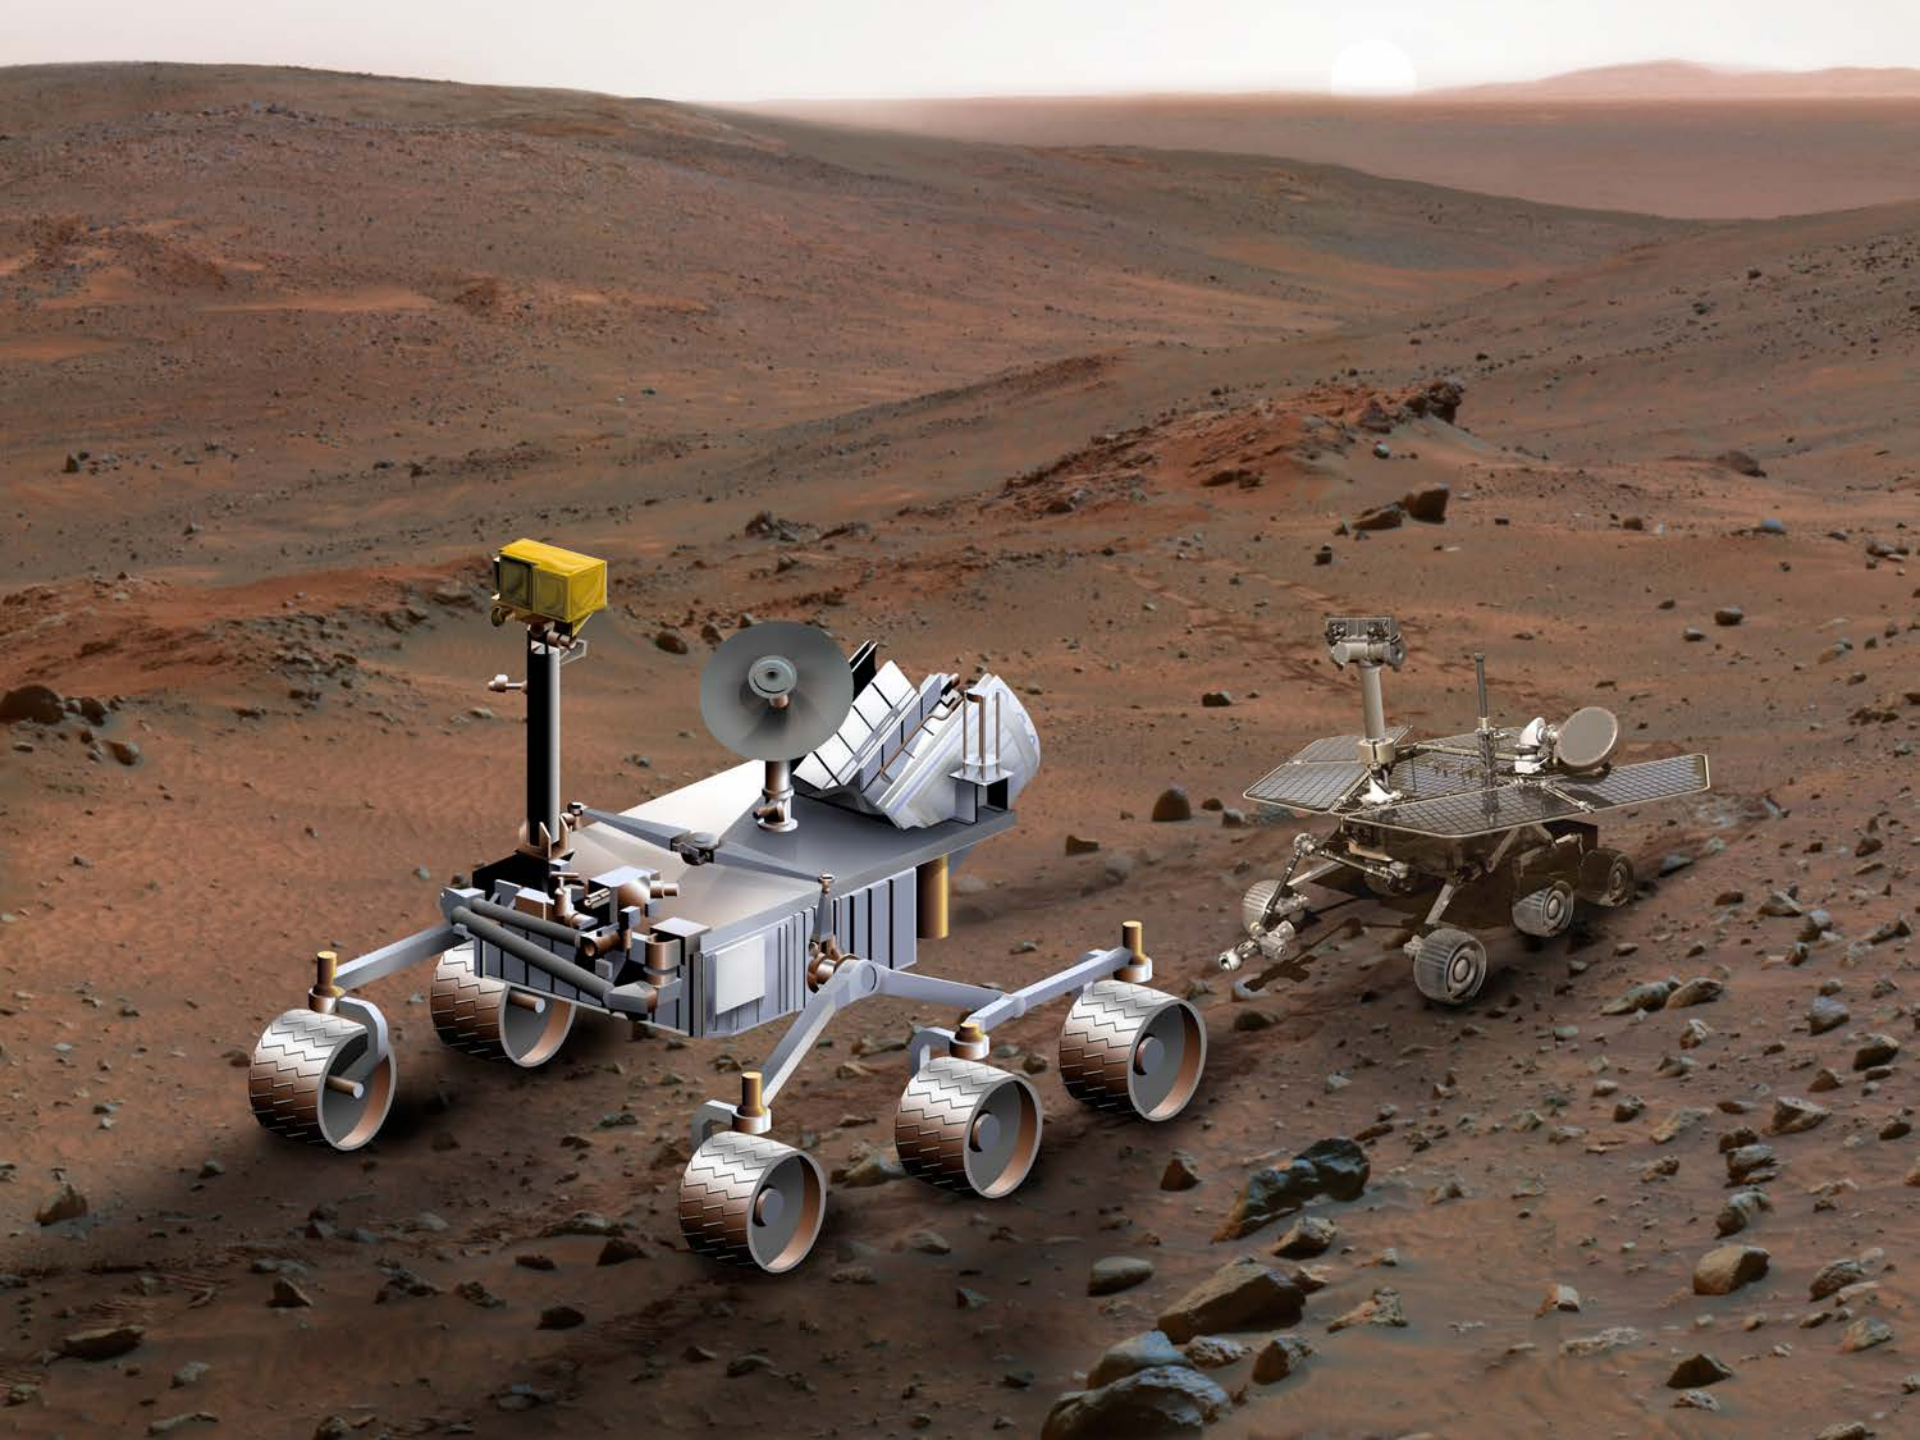




MSL-MER Comparison

	MSL	MER
LV/Launch Mass	Delta 4/Atlas V/3600 kg	Delta II/1050 kg
Design Mission Life	1 yr cruise/2 yrs surface	7m cruise/3 mo surface
Redundancy	Redundant Surface, Single String Cruise/EDL	Limited/Dual Mission
Payload	10 instruments (75 kg)	5 instrument (~9 kg)
Sample Acquisition	Arm + RAT + Corer + Scoop	Arm + RAT
Sample Processing	Rock Crusher	None
EDL System	Guided Entry/Skycrane	MPF Heritage/Airbags
Heatshield Diam	4.5 m	2.65 m
EDL Comm	UHF + Partial DTE or DTE	DTE + Partial UHF
Rover Mass	775 kg (allocation)	170 kg (actual)
Rover Range	>20 km	>5 km
Surface Power	RTG*/2500 Whr/sol	Solar/<900 Whr/sol
Surface Comm	X-band DTE + UHF	X-band DTE + UHF




MSL Rover Size Comparison

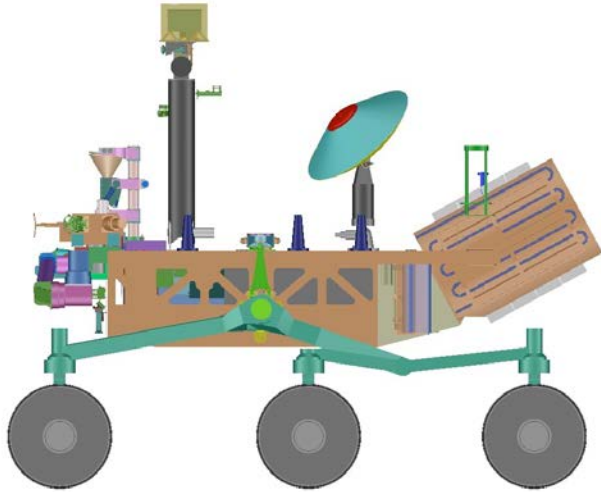

JPL 2009 MSL Rover




 2005 MINI Cooper S

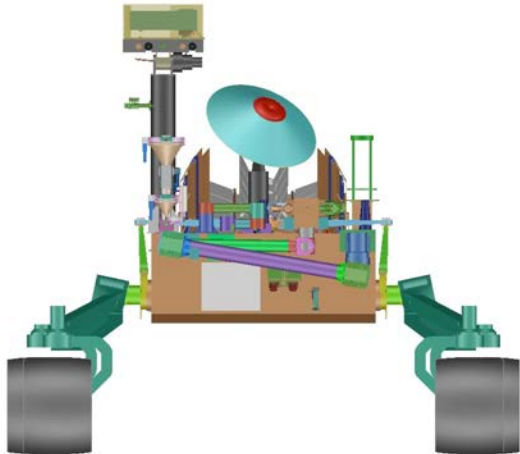




Launch Configuration

- 5m Fairing with 4.65 m internal envelope.
- 66 inch payload interface to MSL Spacecraft.
- RTG integration access
- Heat Rejection System (HRS) loading access
- Requested fairing cleanliness for PP
- Emergency de-fueling access

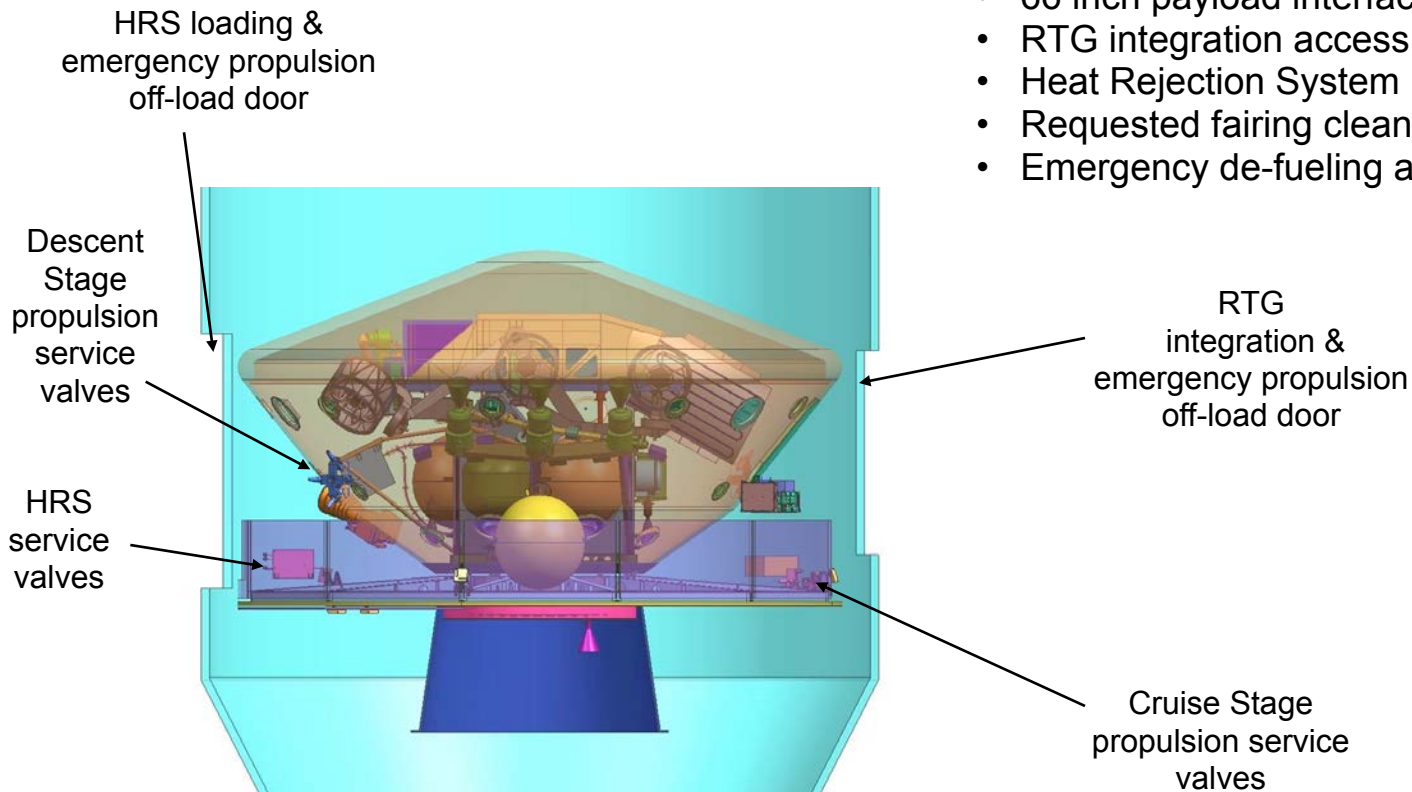




Cruise Configuration (Ghost View)

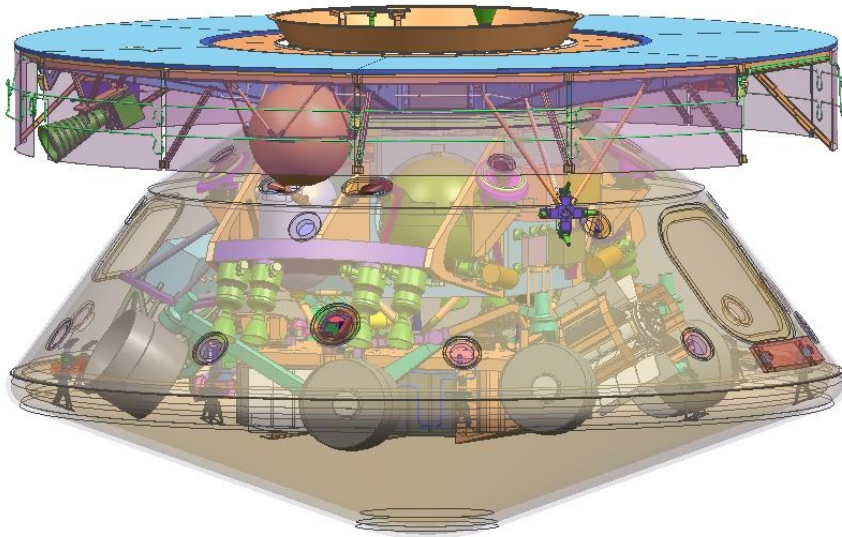


- HRS venting prior to CS release
- MGA and LGA DTE during cruise

- Spinning cruise configuration
 - 2RPM
 - Spun up by Launch Vehicle
- Cruise Mission Time = 9 months (TBR)
- Launch of Delta IV or Atlas V class Vehicle






Event Timeline 1/2

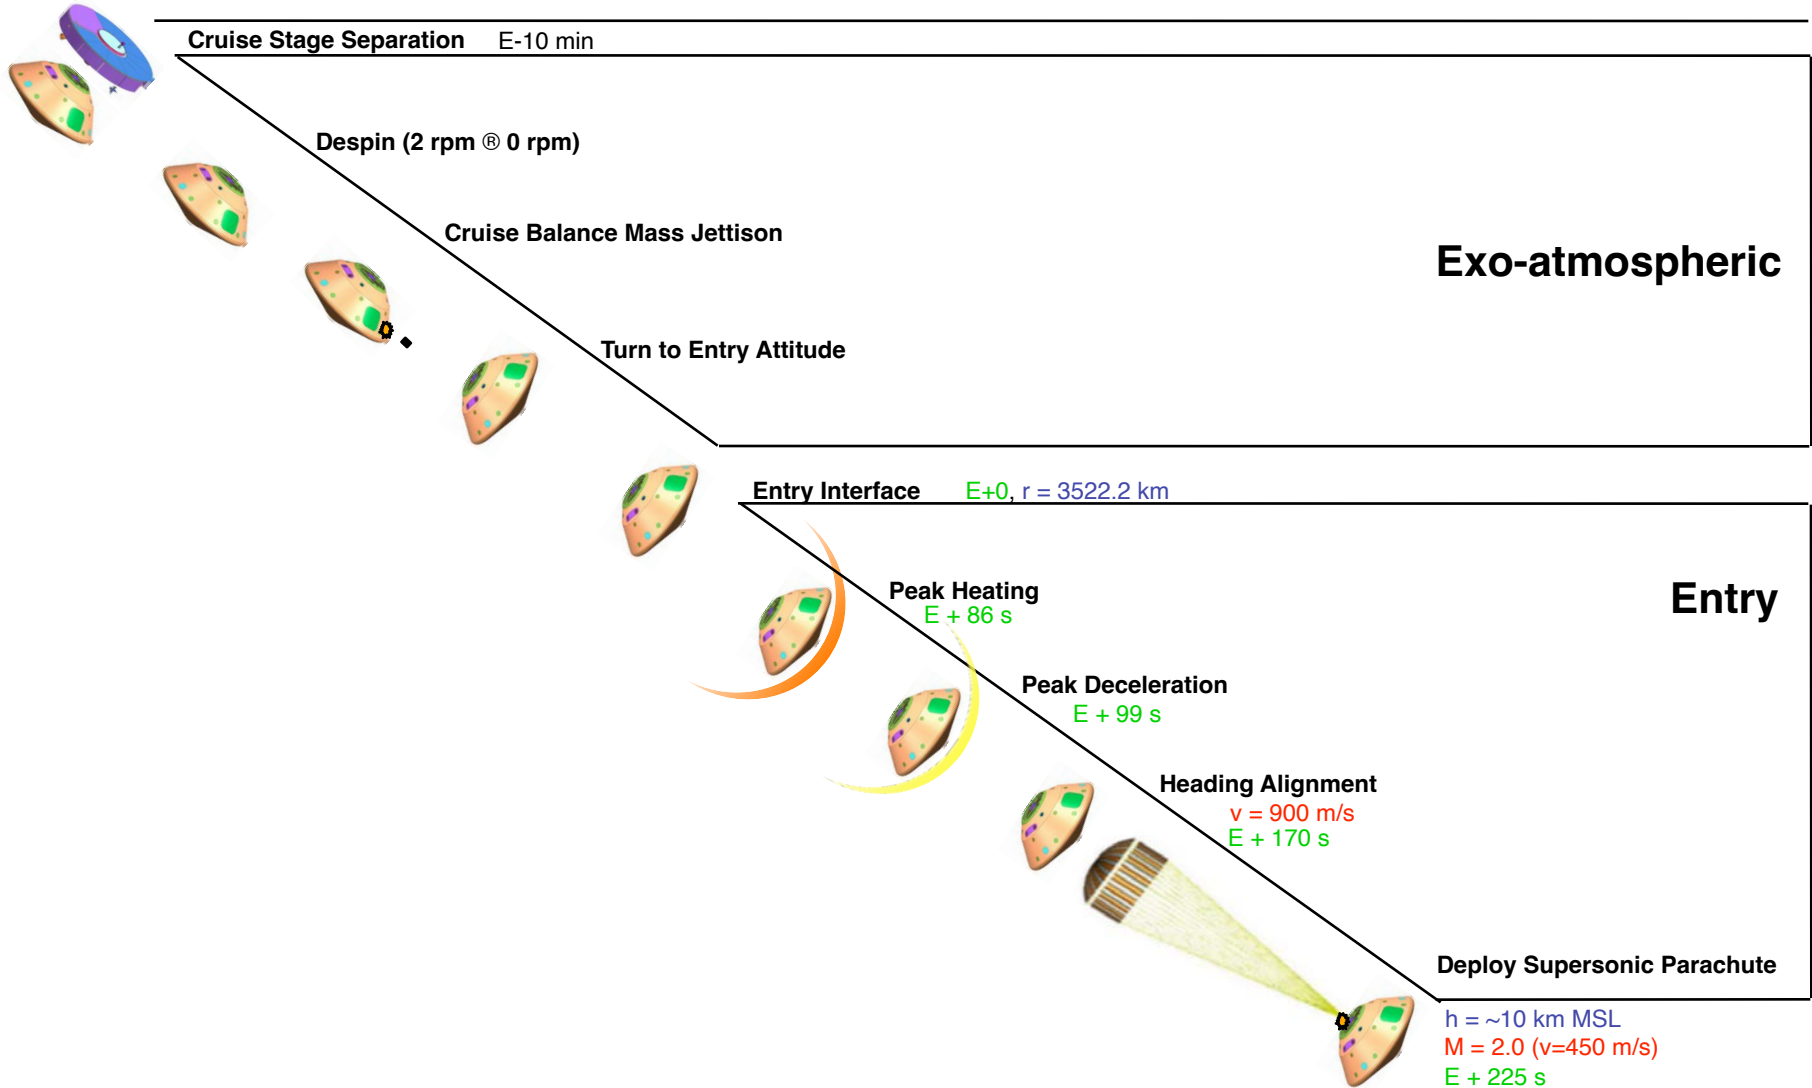




Event Timeline 2/2

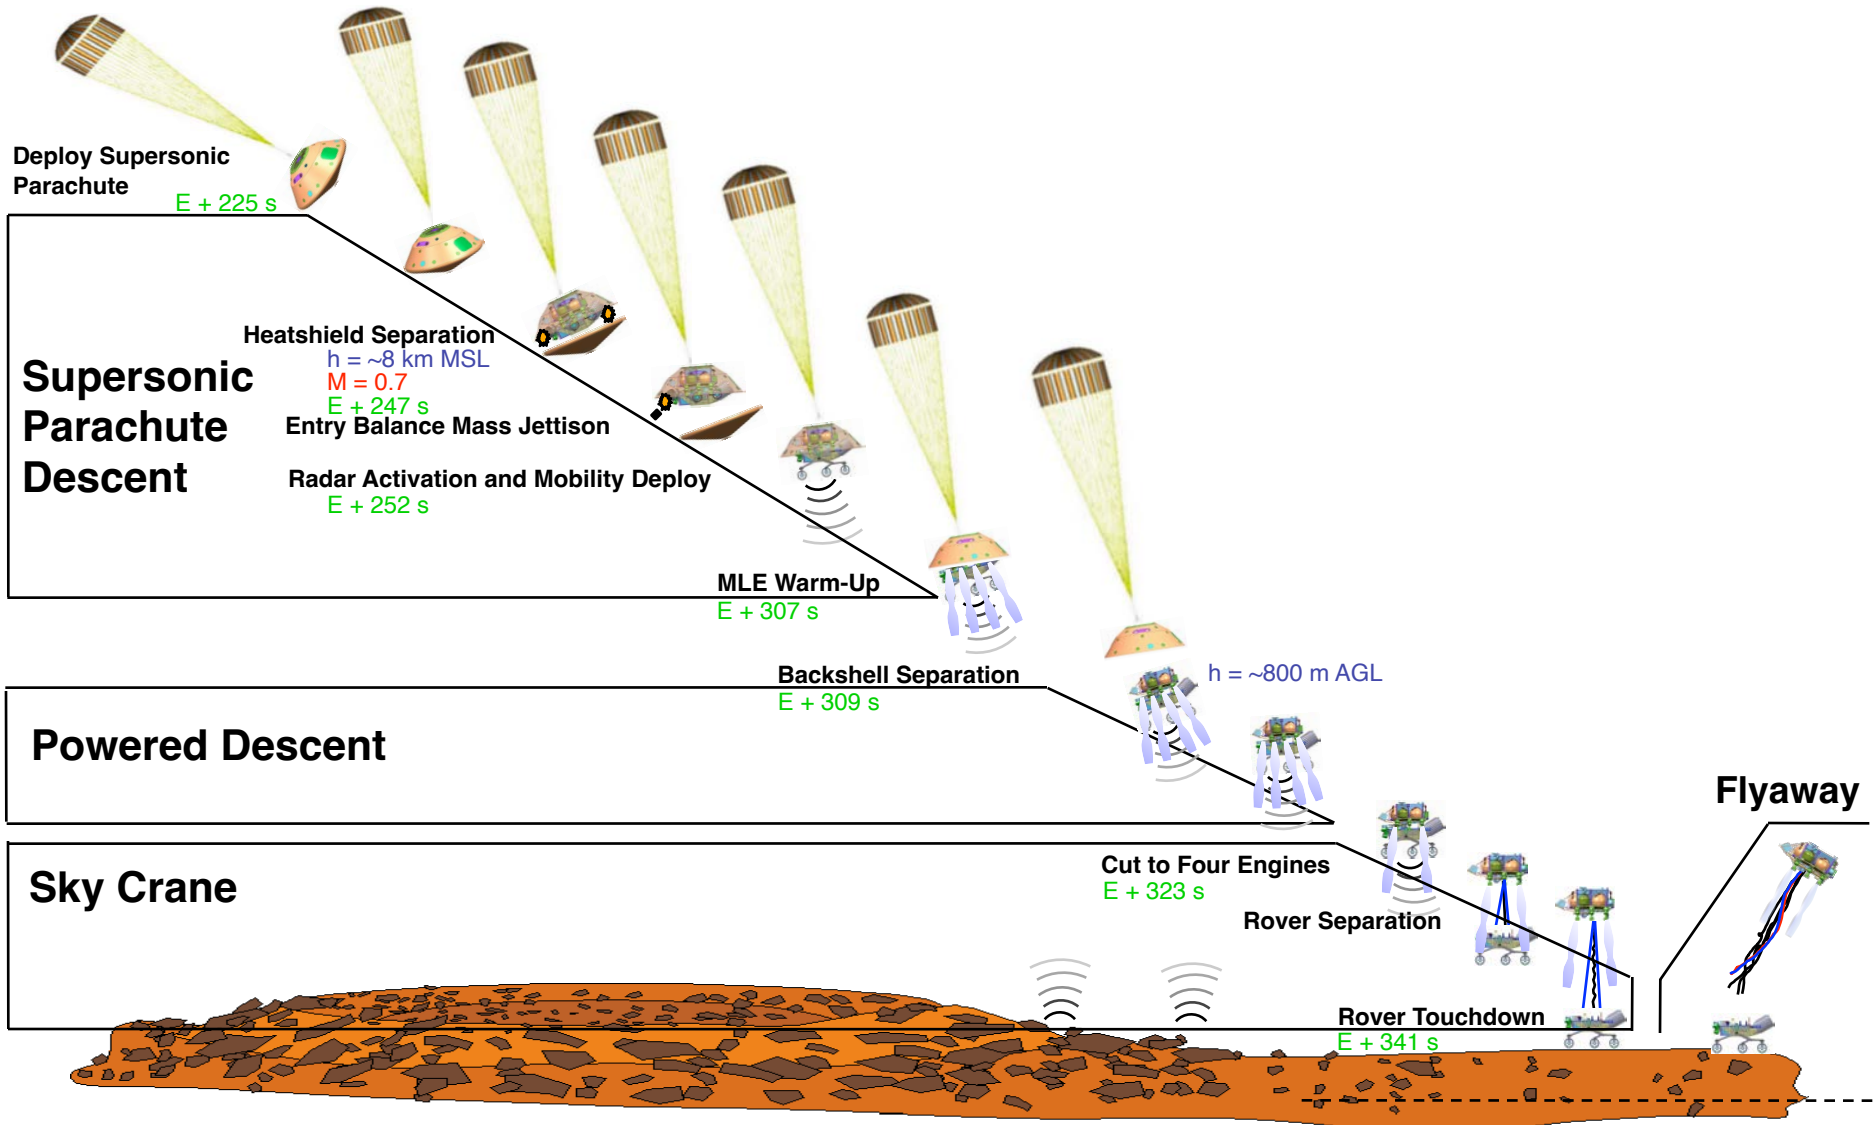




Powered Descent Vehicle (deployed)

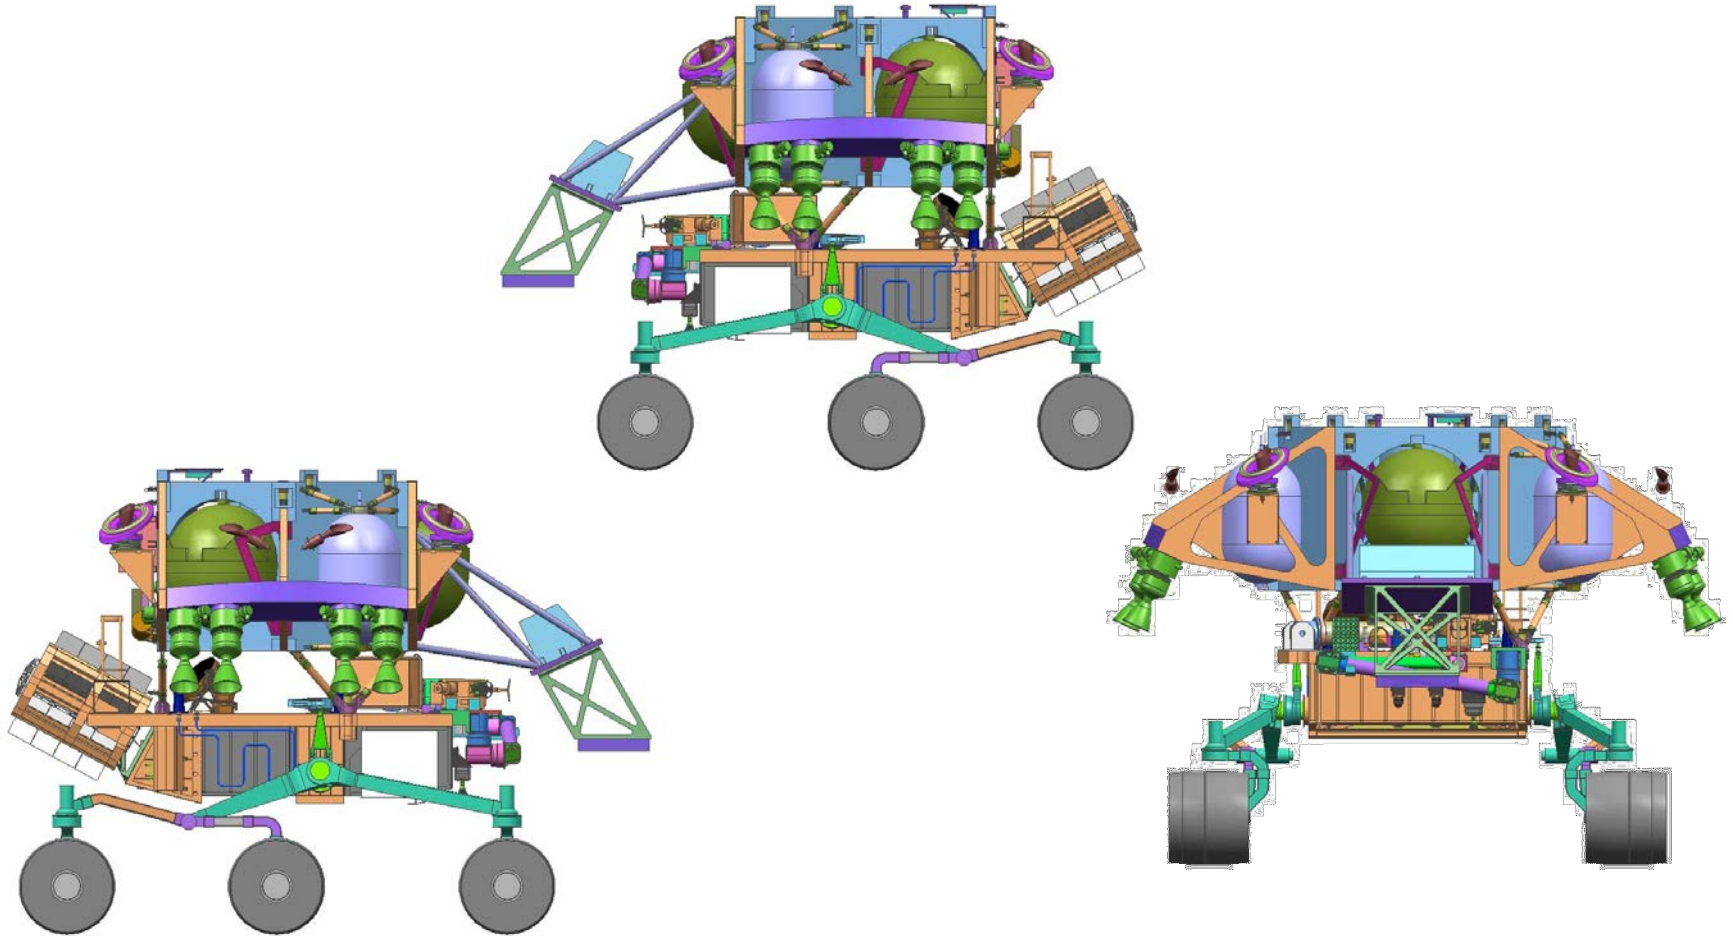




Rover Engineering Capabilities

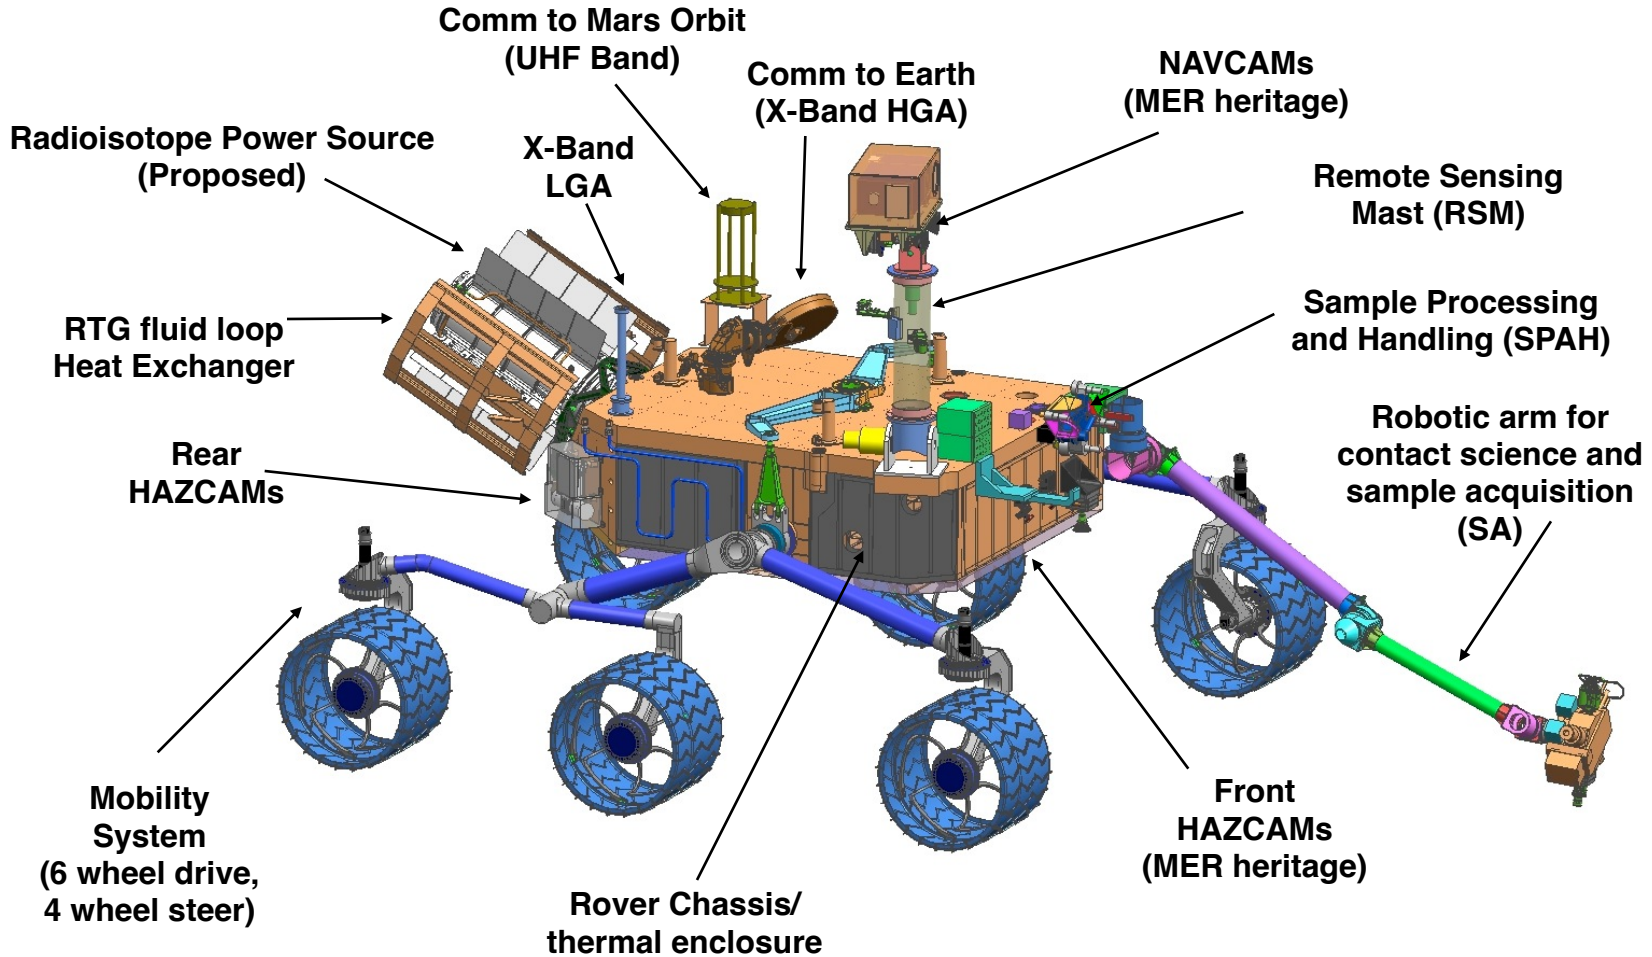



MSL Payload

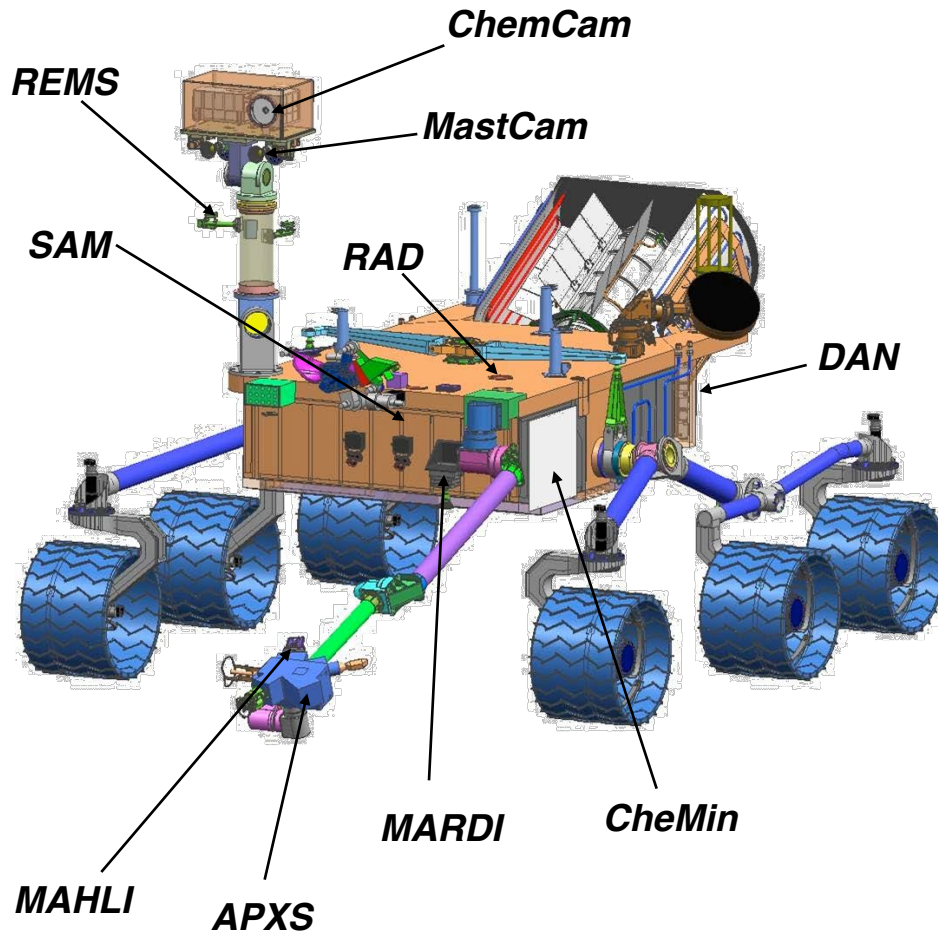

Remote Sensing (Mast)

ChemCam – Laser Induced Breakdown Spectrometer

MastCam - Color Stereo Imager

Contact Instruments (Arm)

MAHLI - Microscopic Imager

APXS - Proton/X-ray Backscatter Spectrometer

Analytical Laboratory (Front Chassis)

SAM - Gas Chromatograph/Mass Spectrometer/
Tunable Laser Spectrometer
(Sample Composition / Organics Detection)

CheMin - X-ray Diffraction / Florescence
(Sample Mineralogy)

Environmental Characterization (Body-mount)

MARDI - Descent Imager

REMS - Meteorological monitoring

RAD - Surface Radiation Flux Monitor
(future human health & safety)

DAN - Neutron Backscatter subsurface hydrogen
(water/ice) detection

MSL High Fidelity Ground Testbed



UNIVERSITY OF
MARYLAND

MSL Wheel (Pristine)



JPL MSL Wheel Test Fixture



MSL Wheel (Well-Loved)



The Ultimate Mars Rover..

