# Orbital Mechanics

- Planetary launch and entry overview
- Energy and velocity in orbit
- Elliptical orbit parameters
- Orbital elements
- Coplanar orbital transfers
- Noncoplanar transfers
- Time in orbit
- Interplanetary trajectories

© 2020 David L. Akin - All rights reserved
http://spacecraft.ssl.umd.edu

# Orbital Mechanics: 500 years in 40 min.

- Newton's Law of Universal Gravitation

$$F = \frac{G m_1 m_2}{r^2}$$

- Newton's First Law meets vector algebra

$$\vec{F} = m\vec{a}$$

# Relative Motion Between Two Bodies

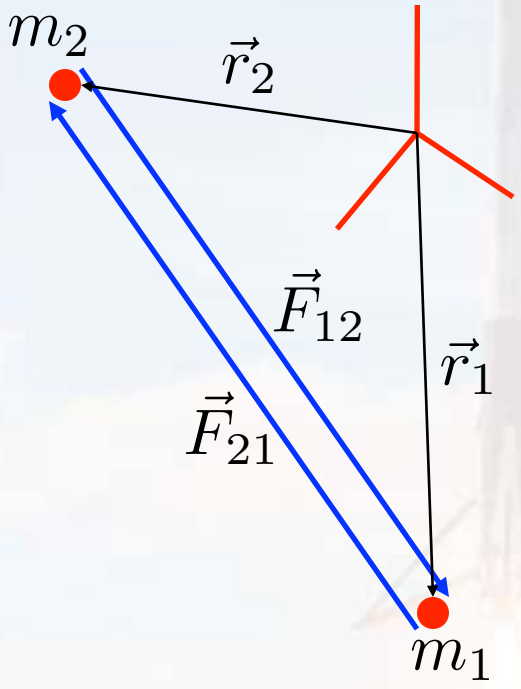


$$m_1 \frac{d^2\vec{r}_1}{dt^2} = G\frac{m_1 m_2}{\left|\vec{r}_{21}\right|^2}\frac{\vec{r}_{21}}{\left|\vec{r}_{21}\right|}$$

$$= G\frac{m_1 m_2}{\left|\vec{r}_{21}\right|^3}\vec{r}_{21} = G\frac{m_1 m_2}{\left|\vec{r}_{21}\right|^3}\left(\vec{r}_2 - \vec{r}_1\right)$$

$$m_2 \frac{d^2\vec{r}_2}{dt^2} = G\frac{m_1 m_2}{\left|\vec{r}_{12}\right|^3}\left(\vec{r}_1 - \vec{r}_2\right)$$

$\vec{F}_{12} =$ force due to body 1 on body 2

# Gravitational Motion

$$\text{Let } r = |\vec{r}_{12}| = |\vec{r}_{21}| \qquad \text{Let } \vec{r} = \vec{r}_1 - \vec{r}_2$$

$$\frac{d^2\vec{r}}{dt^2} = \frac{G}{r^3}\left[m_2\left(-\vec{r}\right) - m_1\left(\vec{r}\right)\right] = \frac{-G}{r^3}\left(m_1 + m_2\right)\vec{r}$$

$$\text{Let } \mu = G(m_1 + m_2)$$

$$\boxed{\frac{d^2\vec{r}}{dt^2} + \mu\frac{\vec{r}}{r^3} = \vec{0}}$$

"Equation of Orbit" -
Orbital motion is simple harmonic motion

# Orbital Angular Momentum

$$\vec{v} = \frac{d\vec{r}}{dt} \qquad \frac{d\vec{v}}{dt} + \mu \frac{\vec{r}}{r^3} = \vec{0}$$

$$\vec{r} \times \frac{d\vec{v}}{dt} + \frac{\mu}{r^3}(\vec{r} \times \vec{r}) = \vec{0} \qquad \vec{r} \times \frac{d\vec{v}}{dt} = \vec{0}$$

$$\frac{d}{dt}(\vec{r} \times \vec{v}) = \frac{d\vec{r}}{dt} \times \vec{v} + \vec{r} \times \frac{d\vec{v}}{dt}$$

$$= \vec{v} \times \vec{v} + \vec{r} \times \frac{d\vec{v}}{dt} = \vec{r} \times \frac{d\vec{v}}{dt} = \vec{0}$$

$$\frac{d}{dt}(\vec{r} \times \vec{v}) = \vec{0} \qquad \vec{r} \times \vec{v} = constant \qquad \vec{r} \times \vec{v} = \vec{h}$$

$\vec{h}$ is angular momentum vector (constant) $\Longrightarrow$
$\vec{r}$ and $\vec{v}$ are in a constant plane

# Fun and Games with Algebra

$$\frac{d\vec{v}}{dt} + \mu\frac{\vec{r}}{r^3} = \vec{0}$$

$$\frac{d\vec{v}}{dt} \times \vec{h} + \frac{\mu}{r^3}\left(\vec{r} \times \vec{h}\right) = \vec{0}$$

$$\frac{d}{dt}\left(\vec{v} \times \vec{h}\right) = \frac{d\vec{v}}{dt} \times \vec{h} + \vec{v} \times \frac{d\vec{h}}{dt}$$

0

$$\frac{d}{dt}\left(\vec{v} \times \vec{h}\right) = -\frac{\mu}{r^3}\left(\vec{r} \times \vec{h}\right) = -\frac{\mu}{r^3}\left(\vec{r} \times \vec{r} \times \vec{v}\right)$$

$$\frac{d}{dt}\left(\vec{v} \times \vec{h}\right) = -\frac{\mu}{r^3}\left[\left(\vec{r} \cdot \vec{v}\right)\vec{r} - \left(\vec{r} \cdot \vec{r}\right)\vec{v}\right]$$

$$\vec{r} \cdot \vec{v} = rv\cos\gamma = r\frac{dr}{dt}$$

# More Algebra, More Fun

$$\frac{d}{dt}\left(\vec{v}\times\vec{h}\right)=-\frac{\mu}{r^3}\left[r\frac{dr}{dt}\vec{r}-r^2\frac{d\vec{r}}{dt}\right]$$

$$\frac{d}{dt}\left(\frac{\vec{r}}{r}\right)=\frac{\left(r\frac{d\vec{r}}{dt}-\vec{r}\frac{dr}{dt}\right)}{r^2}=\left(\frac{1}{r}\frac{d\vec{r}}{dt}-\frac{\vec{r}}{r^2}\frac{dr}{dt}\right)$$

$$\frac{d}{dt}\left(\vec{v}\times\vec{h}\right)=-\mu\left(\frac{1}{r^2}\frac{dr}{dt}\vec{r}-\frac{1}{r}\frac{d\vec{r}}{dt}\right)=\mu\frac{d}{dt}\left(\frac{\vec{r}}{r}\right)$$

$$\frac{d}{dt}\left(\vec{v}\times\vec{h}-\mu\frac{\vec{r}}{r}\right)=\vec{0}$$

# Orientation of the Orbit

$$\vec{v} \times \vec{h} - \mu \frac{\vec{r}}{r} = \text{constant}$$

$$\vec{v} \times \vec{h} - \mu \frac{\vec{r}}{r} = \mu \vec{e}$$

$\vec{e} \equiv$ eccentricity vector, in orbital plane

$\vec{e}$ points in the direction of periapsis

$$\vec{r} \cdot \vec{v} \times \vec{h} - \vec{r} \cdot \mu \frac{\vec{r}}{r} = \mu \left( \vec{r} \cdot \vec{e} \right)$$

$$\vec{r} \times \vec{v} \cdot \vec{h} - \mu \frac{\vec{r} \cdot \vec{r}}{r} = \mu r e \cos \theta$$

$$\vec{h} \cdot \vec{h} - \mu \frac{r^2}{r} = \mu r e \cos \theta$$

# Position in Orbit

$$h^2 - \mu r = \mu r e \cos\theta$$

$$r = \frac{h^2/\mu}{1 + e\cos\theta}$$

θ = true anomaly: angular travel from perigee passage

$$\text{at } \theta = \pm\frac{\pi}{2};\ \cos\theta = 0;\ r = p \equiv h^2/\mu$$

# Relating Velocity and Orbital Elements

$$\mu\vec{e} = \vec{v} \times \vec{h} - \mu\frac{\vec{r}}{r}$$

$$\mu\vec{e} \cdot \mu\vec{e} = \vec{v} \times \vec{h} \cdot \vec{v} \times \vec{h} - 2\mu\left(\vec{v} \times \vec{h}\right) \cdot \frac{\vec{r}}{r} + \mu^2\left(\frac{\vec{r}}{r} \cdot \frac{\vec{r}}{r}\right)$$

$$\mu^2 e^2 = v^2 h^2 - 2\mu\frac{h^2}{r} + \mu^2$$

$$e^2 = \frac{v^2}{\mu}p - 2\frac{p}{r} + 1$$

# Vis-Viva Equation

$$p \equiv a(1-e^2) = \frac{1-e^2}{\frac{2}{r} - \frac{v^2}{\mu}}$$

$$a = \left(\frac{2}{r} - \frac{v^2}{\mu}\right)^{-1}$$

$$v^2 = \mu\left(\frac{2}{r} - \frac{1}{a}\right)$$

<--Vis-Viva Equation

$$\frac{v^2}{2} - \frac{\mu}{r} = -\frac{\mu}{2a}$$

# Energy in Orbit

- Kinetic Energy

$$K.E. = \frac{1}{2}mv^2 \Rightarrow \frac{K.E.}{m} = \frac{v^2}{2}$$

- Potential Energy

$$P.E. = -\frac{m\mu}{r} \Rightarrow \frac{P.E.}{m} = -\frac{\mu}{r}$$

- Total Energy

$$Const. = \frac{v^2}{2} - \frac{\mu}{r} = -\frac{\mu}{2a}$$

<--Vis-Viva Equation

# Suborbital Tourism - Spaceship Two

# How Close are we to Space Tourism?

- Energy for 100 km vertical climb

$$-\frac{\mu}{r_E + 100\ km} + \frac{\mu}{r_E} = 0.965\ \frac{km^2}{sec^2} = 0.965\ \frac{MJ}{kg}$$

- Energy for 200 km circular orbit

$$-\frac{\mu}{2(r_E + 200\ km)} + \frac{\mu}{r_E} = 32.2\ \frac{km^2}{sec^2} = 32.2\ \frac{MJ}{kg}$$

- Energy difference is a factor of 33!

# Implications of Vis-Viva

- Circular orbit (r=a)

$$v_{circular} = \sqrt{\frac{\mu}{r}}$$

- Parabolic escape orbit (a tends to infinity)

$$v_{escape} = \sqrt{\frac{2\mu}{r}}$$

- Relationship between circular and parabolic orbits

$$v_{escape} = \sqrt{2} v_{circular}$$

# Some Useful Constants

- Gravitation constant $\mu = GM$
  - Earth: 398,604 $km^3/sec^2$
  - Moon: 4667.9 $km^3/sec^2$
  - Mars: 42,970 $km^3/sec^2$
  - Sun: $1.327 \times 10^{11}$ $km^3/sec^2$
- Planetary radii
  - $r_{Earth} = 6378$ km
  - $r_{Moon} = 1738$ km
  - $r_{Mars} = 3393$ km

# Classical Parameters of Elliptical Orbits

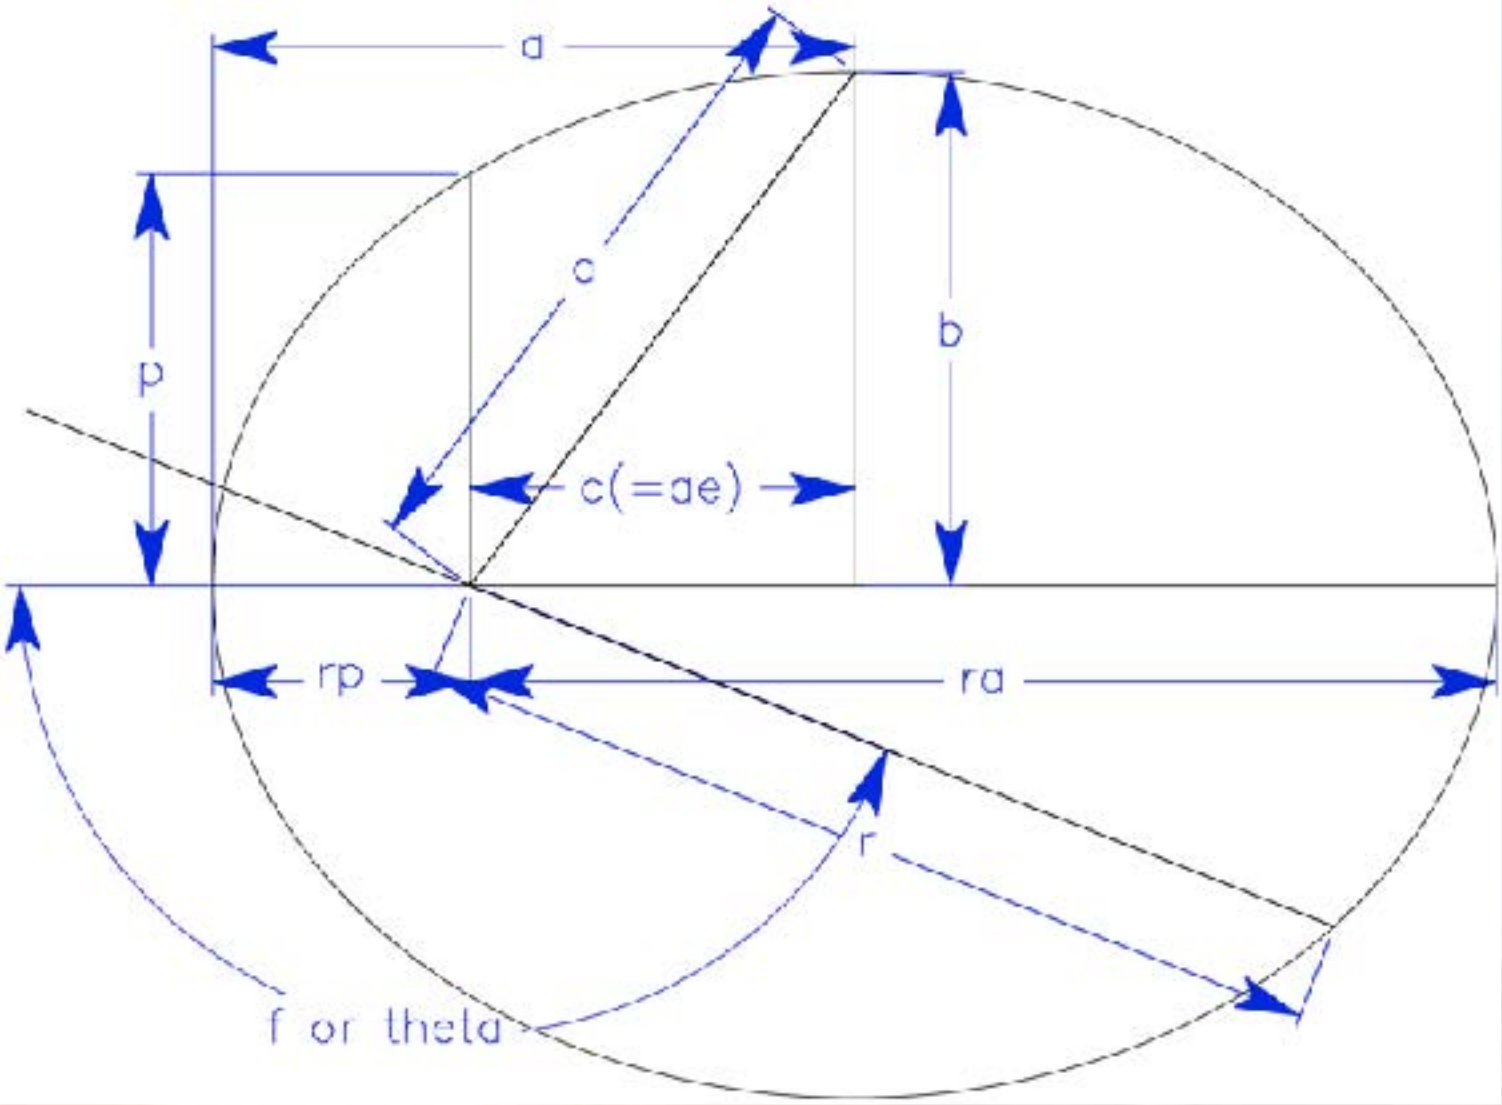

# Basic Orbital Parameters

- Semi-latus rectum (or parameter)

$$p = a(1 - e^2)$$

- Radial distance as function of orbital position

$$r = \frac{p}{1 + e\cos\theta}$$

- Periapse and apoapse distances

$$r_p = a(1 - e) \qquad r_a = a(1 + e)$$

- Angular momentum

$$\vec{h} = \vec{r} \times \vec{v} \qquad h = \sqrt{\mu p}$$

# The Classical Orbital Elements

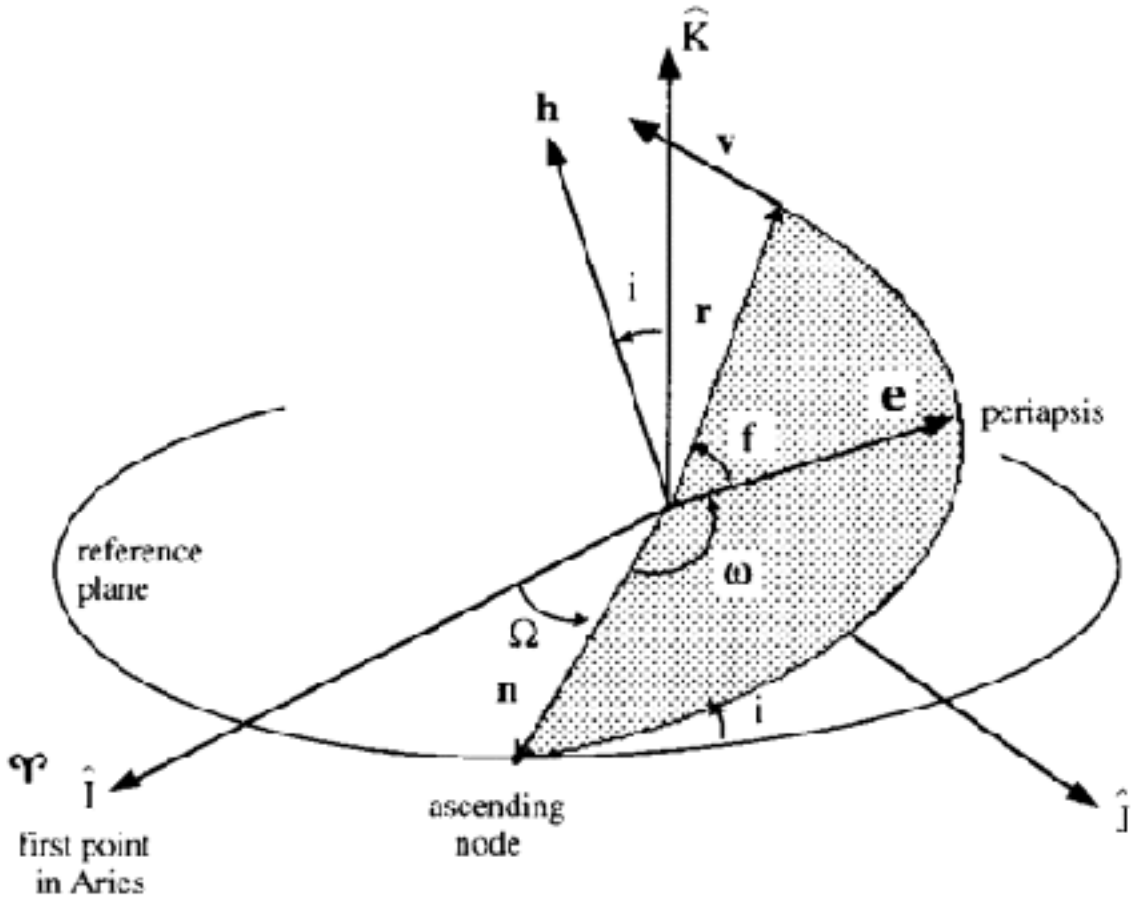


Ω : longitude of the ascending node

ω : argument of periapsis

$\tilde{\omega} = \Omega + \omega$ : longitude of periapsis

f : true anomaly

$L = \tilde{\omega} + f$ : true longitude

Ref: J. E. Prussing and B. A. Conway, Orbital Mechanics Oxford University Press, 1993

# The Hohmann Transfer

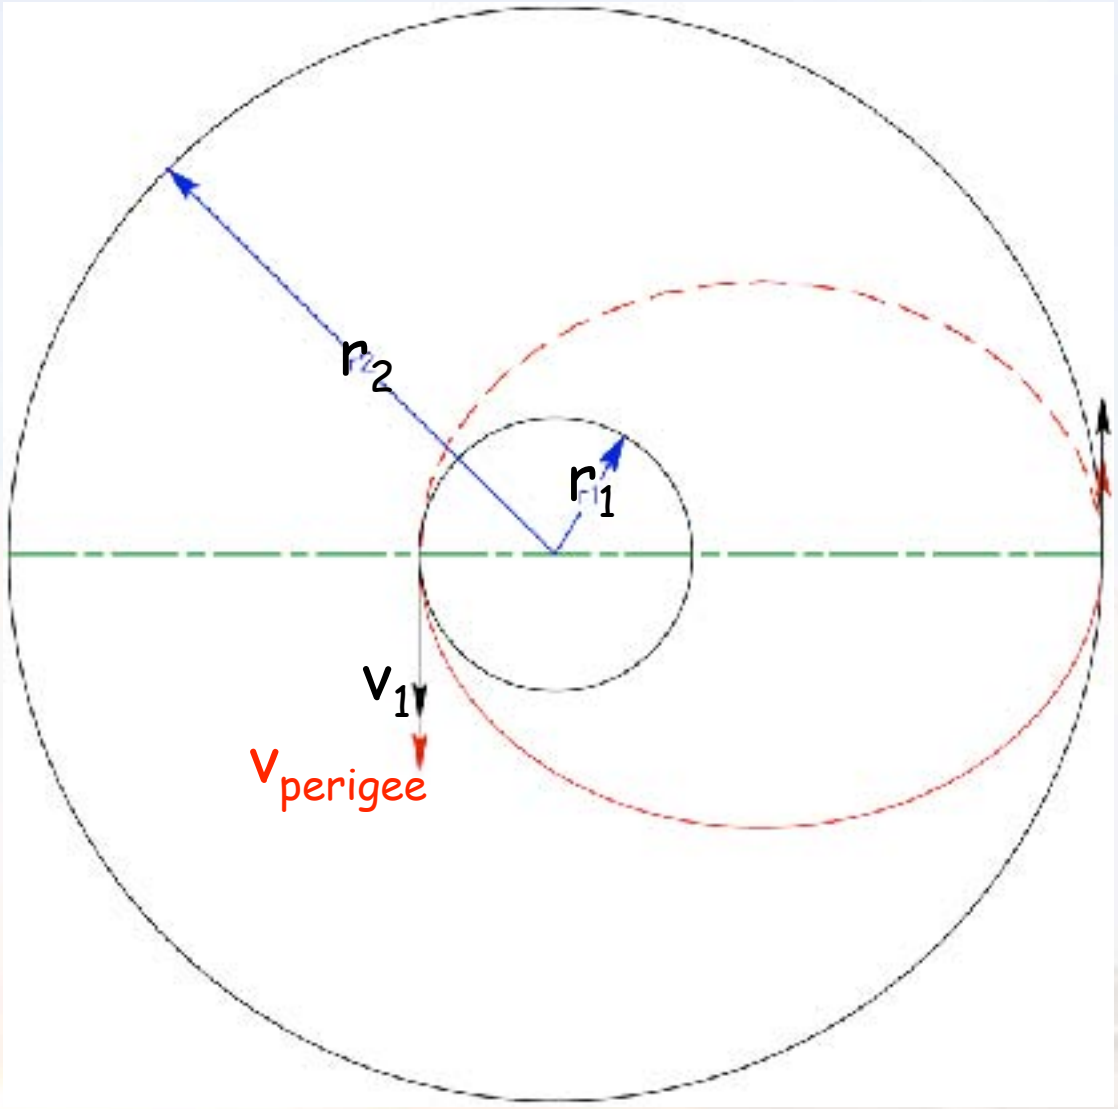

# First Maneuver Velocities

- Initial vehicle velocity

$$v_1 = \sqrt{\frac{\mu}{r_1}}$$

- Needed final velocity

$$v_{perigee} = \sqrt{\frac{\mu}{r_1}}\sqrt{\frac{2r_2}{r_1 + r_2}}$$

- Required $\Delta V$

$$\Delta v_1 = \sqrt{\frac{\mu}{r_1}}\left(\sqrt{\frac{2r_2}{r_1 + r_2}} - 1\right)$$

# Second Maneuver Velocities

- Initial vehicle velocity

$$v_{apogee} = \sqrt{\frac{\mu}{r_2}}\sqrt{\frac{2r_1}{r_1 + r_2}}$$

- Needed final velocity

$$v_2 = \sqrt{\frac{\mu}{r_2}}$$

- Required $\Delta V$

$$\Delta v_2 = \sqrt{\frac{\mu}{r_2}}\left(1 - \sqrt{\frac{2r_1}{r_1 + r_2}}\right)$$

# Limitations on Launch Inclinations

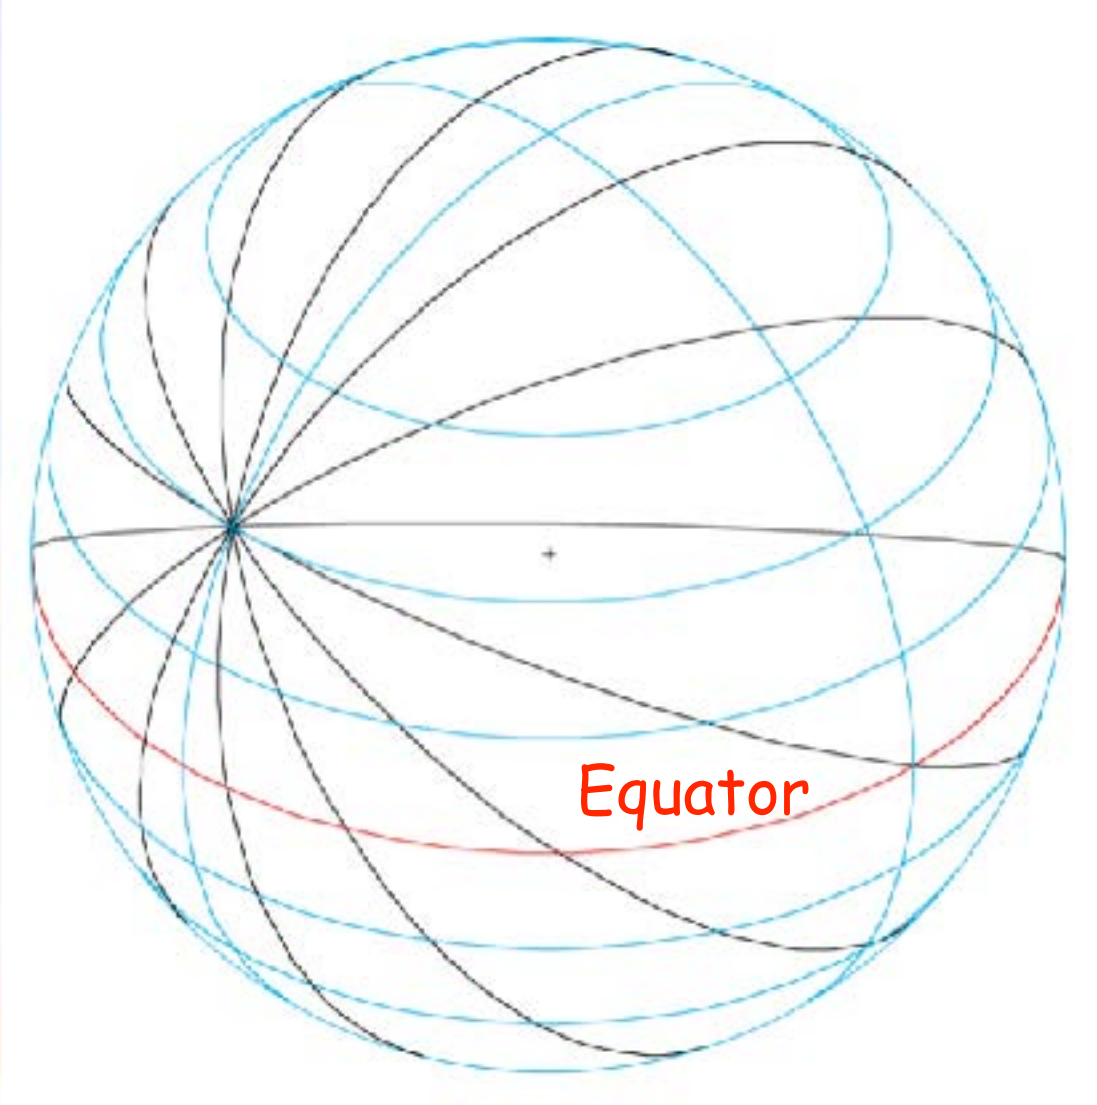

# Differences in Inclination

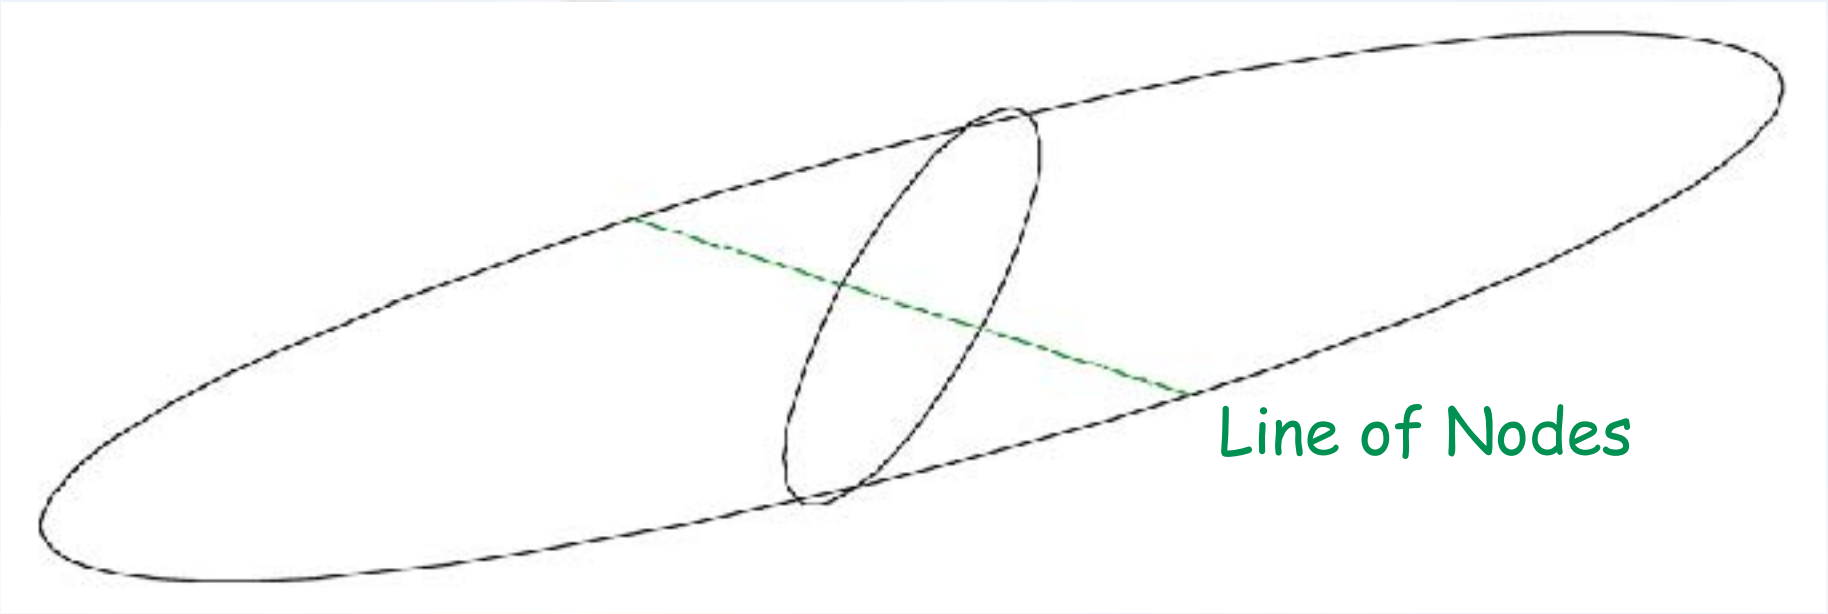

# Choosing the Wrong Line of Apsides

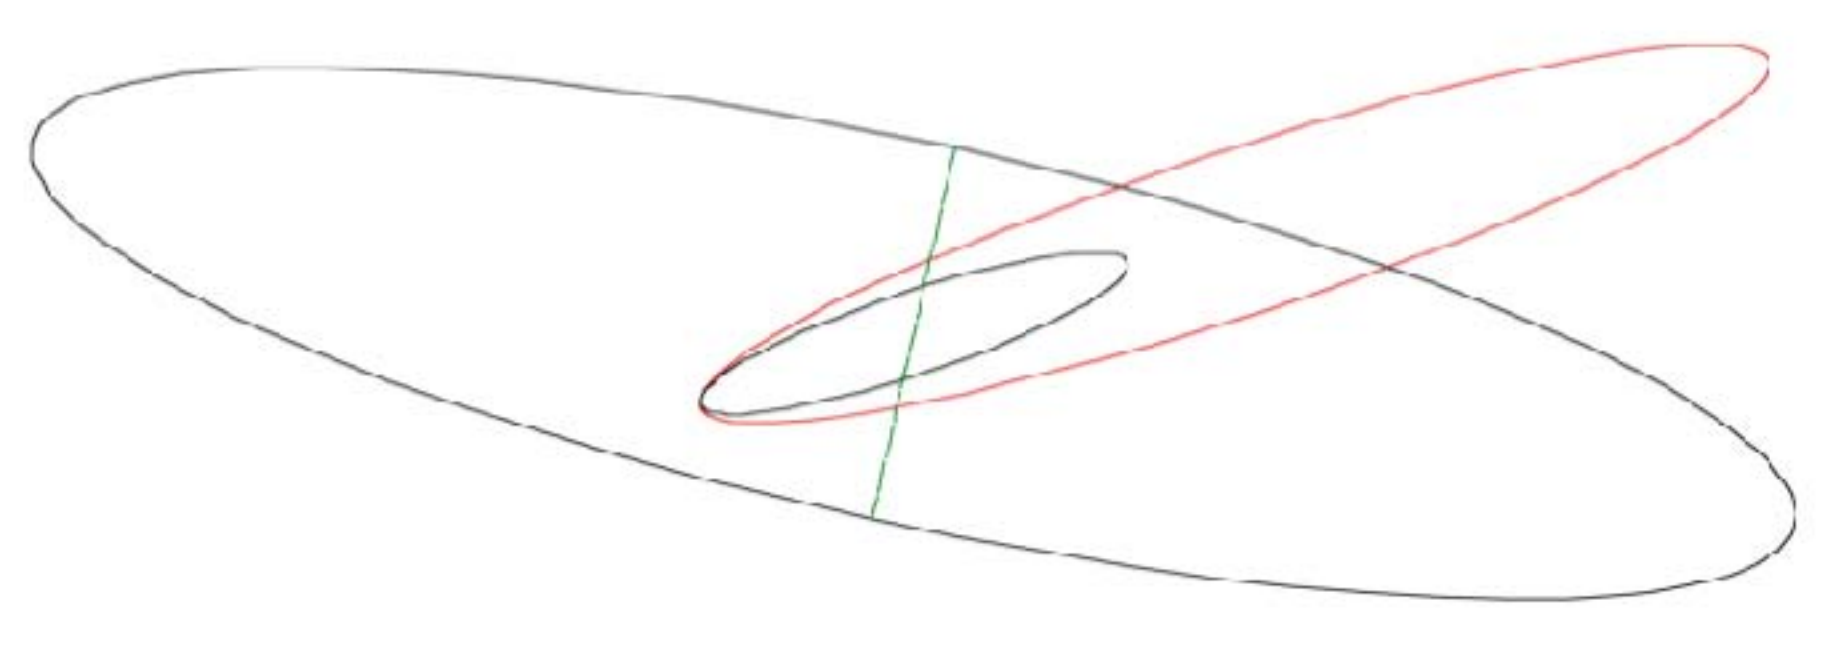

# Simple Plane Change

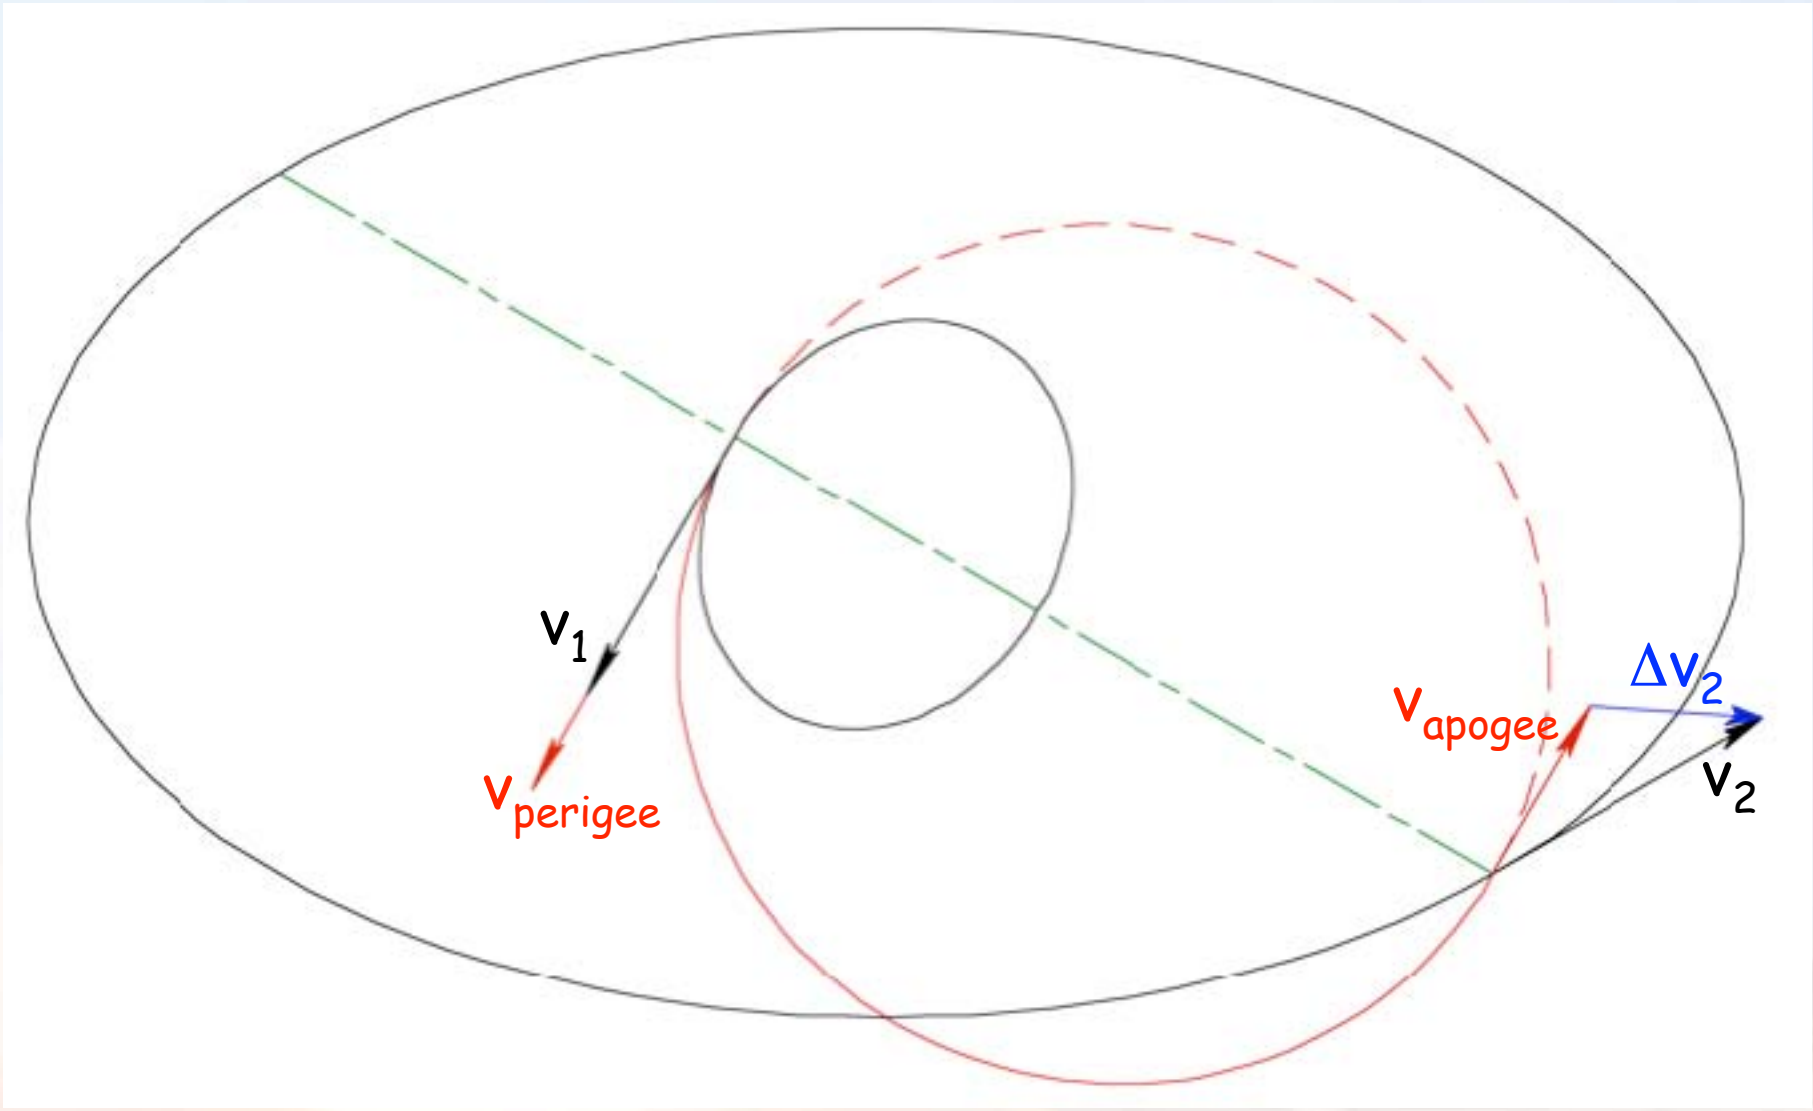

# Optimal Plane Change

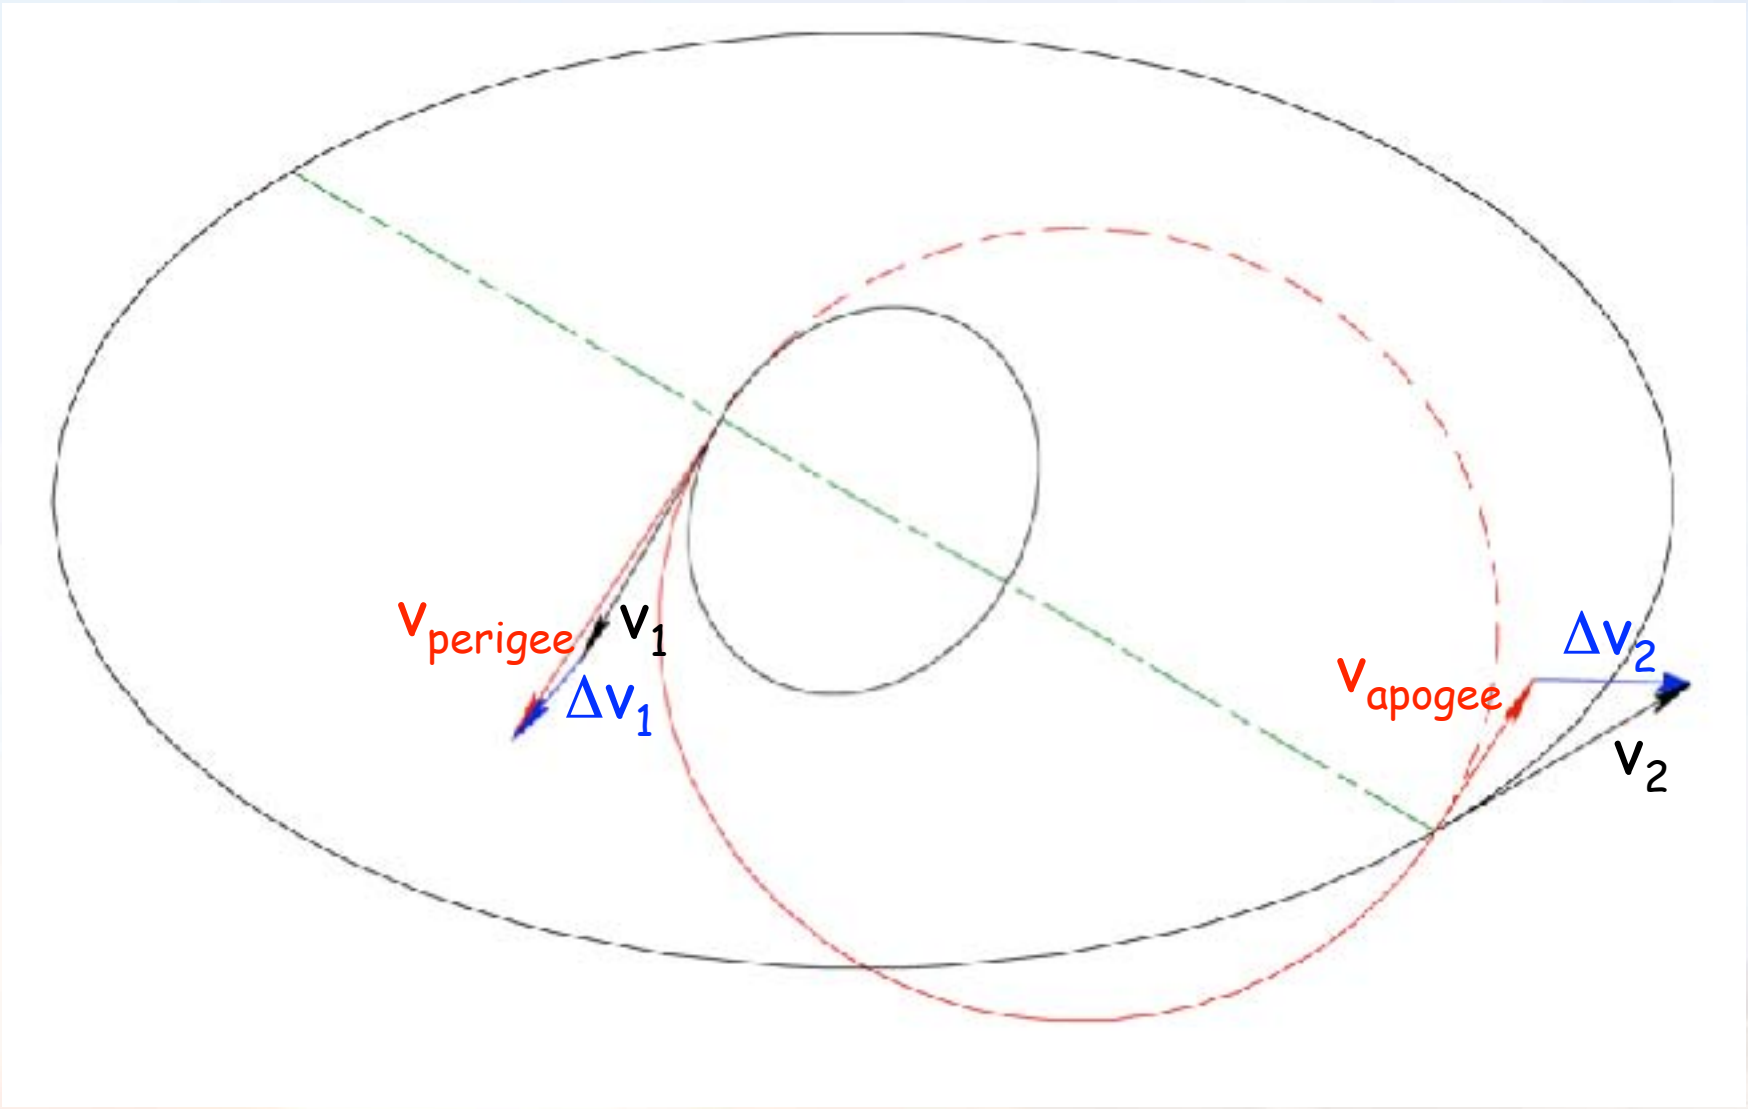

# First Maneuver with Plane Change $\Delta i_1$

- Initial vehicle velocity

$$v_1 = \sqrt{\frac{\mu}{r_1}}$$

- Needed final velocity

$$v_p = \sqrt{\frac{\mu}{r_1}}\sqrt{\frac{2r_2}{r_1 + r_2}}$$

- Required $\Delta V$

$$\Delta v_1 = \sqrt{v_1^2 + v_p^2 - 2v_1 v_p \cos \Delta i_1}$$

# Second Maneuver with Plane Change $\Delta i_2$

- Initial vehicle velocity

$$v_a = \sqrt{\frac{\mu}{r_2}}\sqrt{\frac{2r_1}{r_1 + r_2}}$$

- Needed final velocity

$$v_2 = \sqrt{\frac{\mu}{r_2}}$$

- Required $\Delta V$

$$\Delta v_2 = \sqrt{v_2^2 + v_a^2 - 2v_2 v_a \cos \Delta i_2}$$

# Sample Plane Change Maneuver

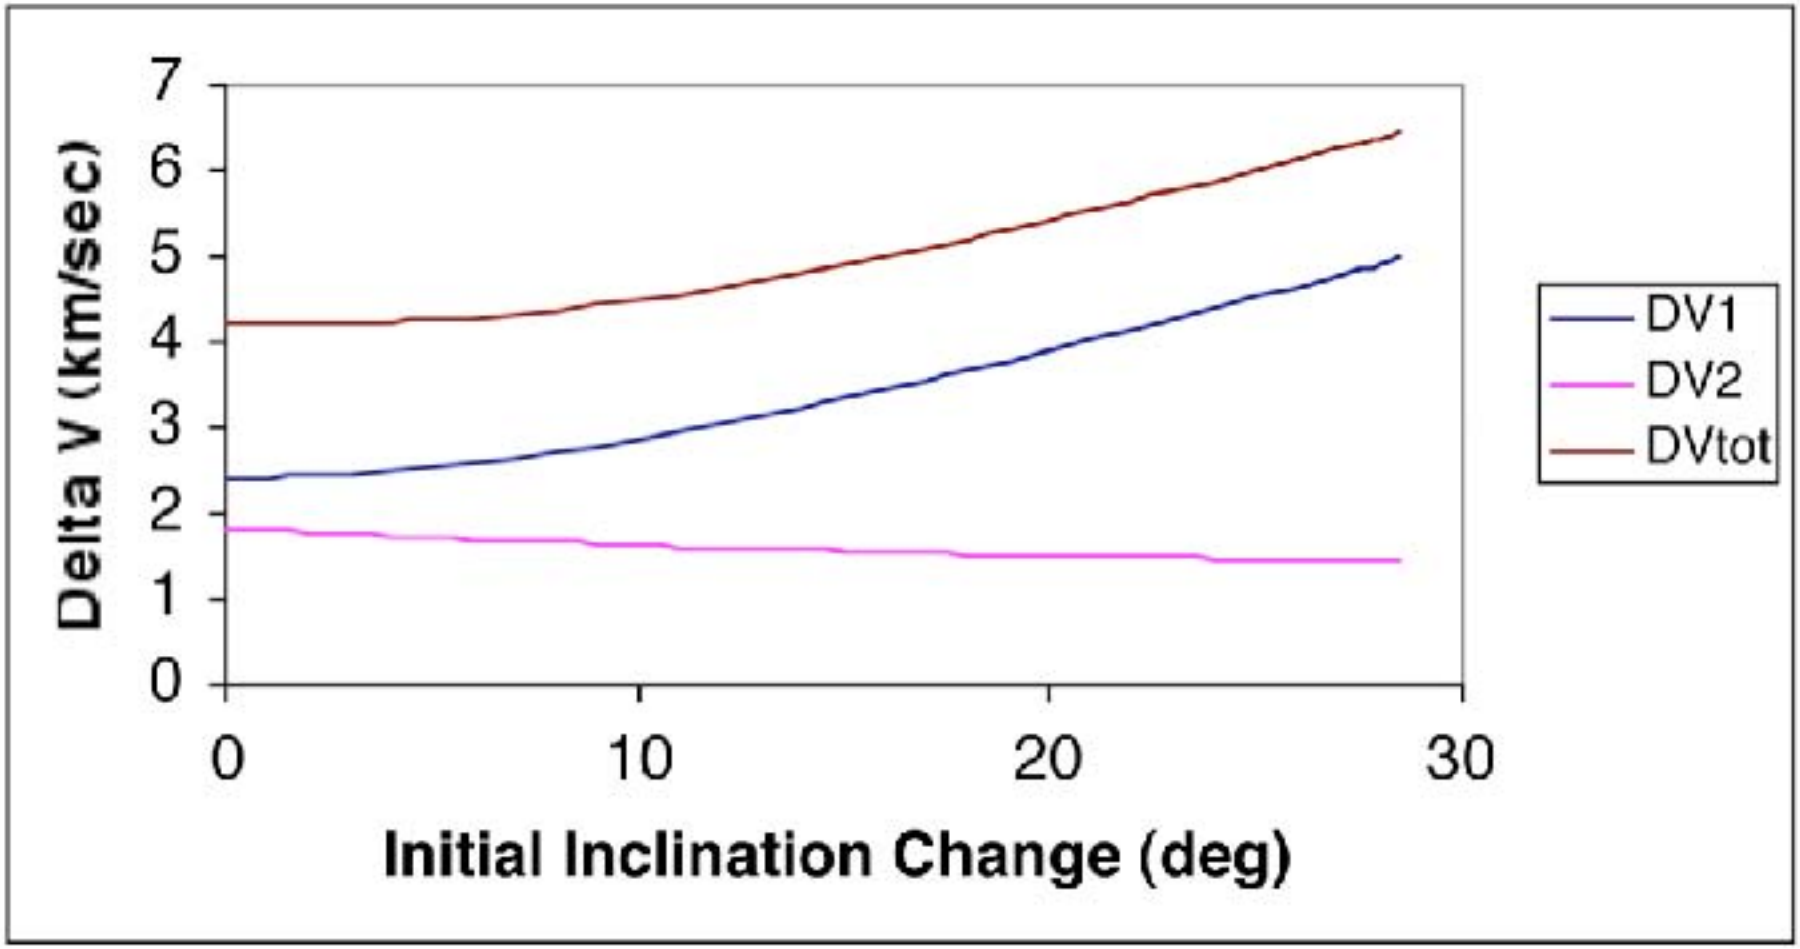


Optimum initial plane change = 2.20°

# Calculating Time in Orbit

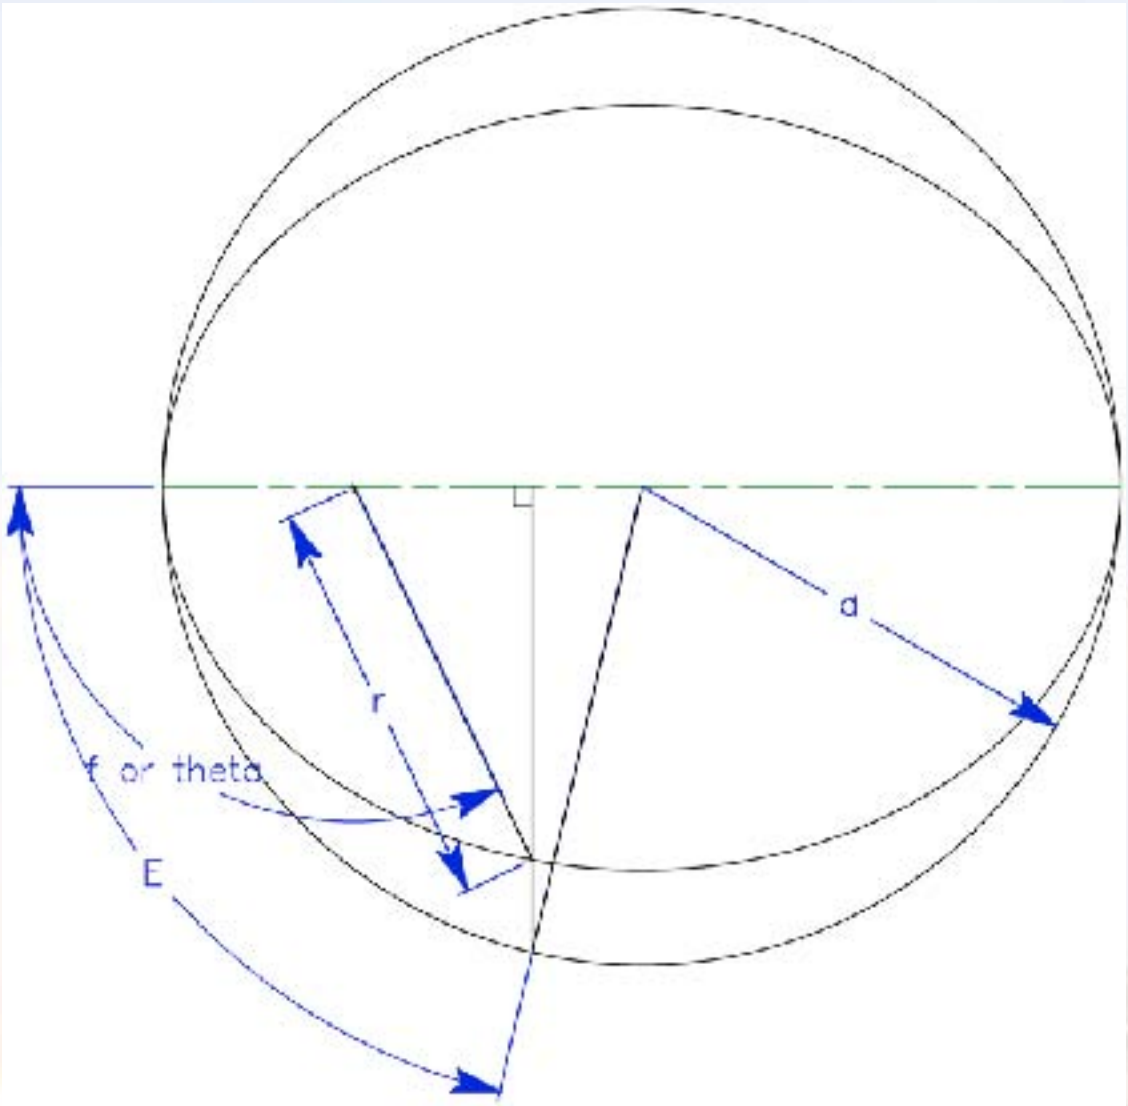

# Time in Orbit

- Period of an orbit

$$P = 2\pi\sqrt{\frac{a^3}{\mu}}$$

- Mean motion (average angular velocity)

$$n = \sqrt{\frac{\mu}{a^3}}$$

- Time since pericenter passage

$$M = nt = E - e\sin E$$

➥M=mean anomaly

# Dealing with the Eccentric Anomaly

- Relationship to orbit

$$r = a\left(1 - e\cos E\right)$$

- Relationship to true anomaly

$$\tan\frac{\theta}{2} = \sqrt{\frac{1+e}{1-e}}\tan\frac{E}{2}$$

- Calculating M from time interval: iterate

$$E_{i+1} = nt + e\sin E_i$$

until it converges

# Example: Time in Orbit

- Hohmann transfer from LEO to GEO
  - $h_1$=300 km --> $r_1$=6378+300=6678 km
  - $r_2$=42240 km
- Time of transit (1/2 orbital period)

$$a = \frac{1}{2}(r_1 + r_2) = 24,459\ km$$

$$t_{transit} = \frac{P}{2} = \pi\sqrt{\frac{a^3}{\mu}} = 19,034\ sec = 5h17m14s$$

# Example: Time-based Position

Find the spacecraft position 3 hours after perigee

$$n = \sqrt{\frac{\mu}{a^3}} = 1.650x10^{-4} \ \frac{rad}{sec}$$

$$e = 1 - \frac{r_p}{a} = 0.7270$$

$$E_{j+1} = nt + e \sin E_j = 1.783 + 0.7270 \sin E_j$$

E=0; 1.783; 2.494; 2.222; 2.361; 2.294; 2.328; 2.311; 2.320; 2.316; 2.318; 2.317; 2.317; 2.317

# Example: Time-based Position (cont.)

$$E = 2.317$$

$$r = a(1 - e\cos E) = 12,387 \text{ km}$$

$$\tan\frac{\theta}{2} = \sqrt{\frac{1+e}{1-e}}\tan\frac{E}{2} \Longrightarrow \theta = 160 \text{ deg}$$

Have to be sure to get the position in the proper quadrant - since the time is less than 1/2 the period, the spacecraft has yet to reach apogee --> 0°<θ<180°

# Velocity Components in Orbit

$$r = \frac{p}{1 + e\cos\theta}$$

$$v_r = \frac{dr}{dt} = \frac{d}{dt}\left(\frac{p}{1 + e\cos\theta}\right) = \frac{-p(-e\sin\theta\frac{d\theta}{dt})}{(1 + e\cos\theta)^2}$$

$$v_r = \frac{pe\sin\theta}{(1 + e\cos\theta)^2}\frac{d\theta}{dt}$$

$$1 + e\cos\theta = \frac{p}{r} \Rightarrow v_r = \frac{r^2\frac{d\theta}{dt}e\sin\theta}{p}$$

$$\overrightarrow{h} = \overrightarrow{r} \times \overrightarrow{v}$$

# Velocity Components in Orbit (cont.)

$$\vec{h} = \vec{r} \times \vec{v}$$

$$h = rv\cos\gamma = r\left(r\frac{d\theta}{dt}\right) = r^2\frac{d\theta}{dt}$$

$$v_r = \frac{r^2\frac{d\theta}{dt}e\sin\theta}{p} = \frac{he\sin\theta}{p} = \frac{\sqrt{p\mu}}{p}e\sin\theta$$

$$\boxed{v_r = \sqrt{\frac{\mu}{p}}e\sin\theta}$$

$$v_\theta = r\frac{d\theta}{dt} = r\frac{h}{r^2} = \frac{h}{r} = \frac{\sqrt{p\mu}}{r}$$

$$\boxed{v_\theta = \sqrt{\frac{\mu}{p}}(1 + e\cos\theta)}$$

$$\boxed{\tan\gamma = \frac{v_r}{v_\theta} = \frac{e\sin\theta}{1 + e\cos\theta}}$$

# Patched Conics

- Simple approximation to multi-body motion (e.g., traveling from Earth orbit through solar orbit into Martian orbit)
- Treats multibody problem as "hand-offs" between gravitating bodies --> reduces analysis to sequential two-body problems
- Caveat Emptor: There are a number of formal methods to perform patched conic analysis. The approach presented here is a very simple, convenient, and not altogether accurate method for performing this calculation. Results will be accurate to a few percent, which is adequate at this level of design analysis.

# Example: Lunar Orbit Insertion

- $v_2$ is velocity of moon around Earth
- Moon overtakes spacecraft with velocity of ($v_2$-$v_{apogee}$)
- This is the velocity of the spacecraft relative to the moon while it is effectively "infinitely" far away (before lunar gravity accelerates it) = "hyperbolic excess velocity"

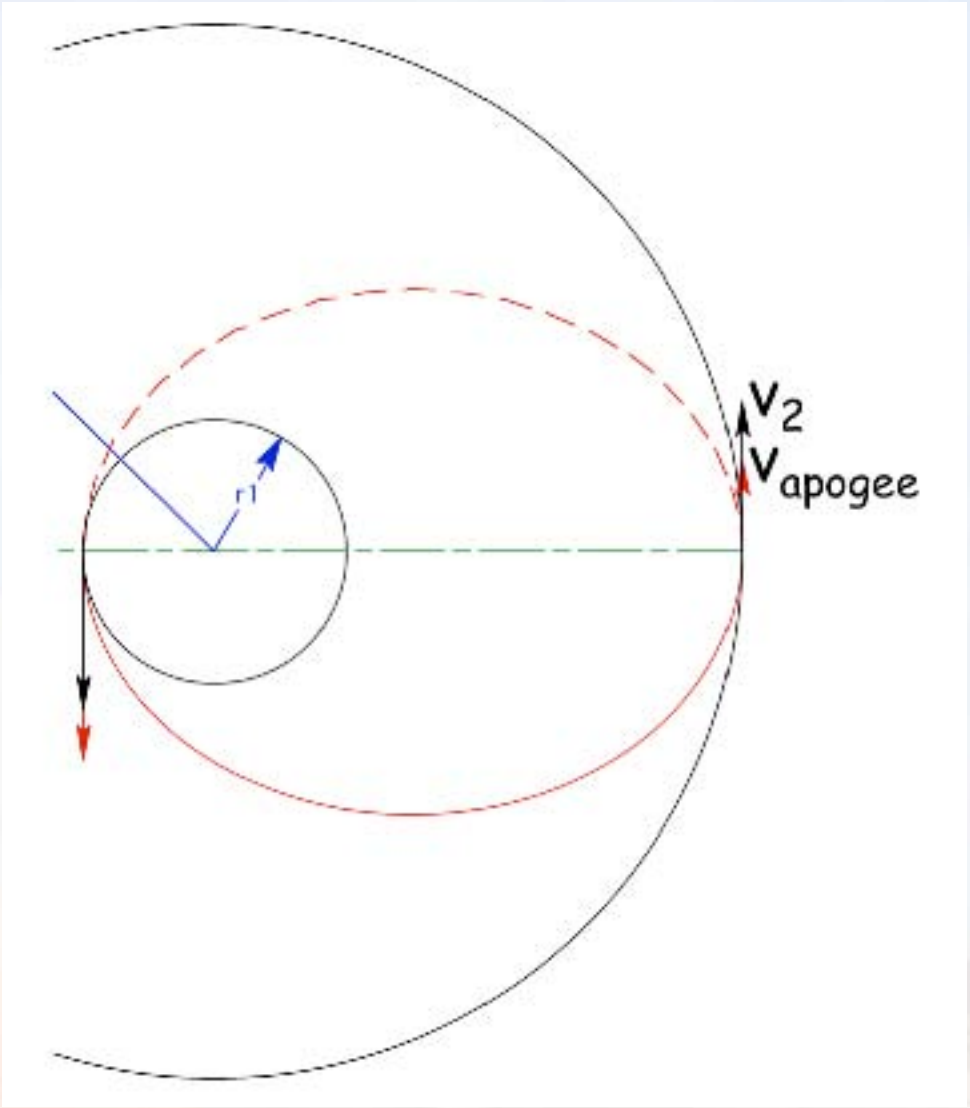

# Planetary Approach Analysis

- Spacecraft has $v_h$ hyperbolic excess velocity, which fixes total energy of approach orbit

$$\frac{v^2}{2} - \frac{\mu}{r} = -\frac{\mu}{2a} = \frac{v_h^2}{2}$$

- Vis-viva provides velocity of approach

$$v = \sqrt{v_h^2 + \frac{2\mu}{r}}$$

- Choose transfer orbit such that approach is tangent to desired final orbit at periapse

$$\Delta v = \sqrt{v_h^2 + \frac{2\mu}{r}} - \sqrt{\frac{\mu}{r}}$$

# Patched Conic - Lunar Approach

- Lunar orbital velocity around the Earth

$$v_m = \sqrt{\frac{\mu}{r_m}} = \sqrt{\frac{398,604}{384,400}} = 1.018 \ \frac{km}{sec}$$

- Apogee velocity of Earth transfer orbit from initial 400 km low Earth orbit

$$v_a = v_m \sqrt{\frac{2r_1}{r_1 + r_m}} = 1.018 \sqrt{\frac{6778}{6778 + 384,400}} = 0.134 \ \frac{km}{sec}$$

- Velocity difference between spacecraft "infinitely" far away and moon (hyperbolic excess velocity)

$$v_h = v_m - v_a = v_m = 1.018 - 0.134 = 0.884 \ \frac{km}{sec}$$

# Patched Conic - Lunar Orbit Insertion

- The spacecraft is now in a hyperbolic orbit of the moon. The velocity it will have at the perilune point tangent to the desired 100 km low lunar orbit is

$$v_{pm} = \sqrt{v_h^2 + \frac{2\mu_m}{r_{LLO}}} = \sqrt{0.884^2 + \frac{2(4667.9)}{1878}} = 2.398 \ \frac{km}{sec}$$

- The required delta-V to slow down into low lunar orbit is

$$\Delta v = v_{pm} - v_{cm} = 2.398 - \sqrt{\frac{4667.9}{1878}} = 0.822 \frac{km}{sec}$$

# ΔV Requirements for Lunar Missions

| To: / From: | Low Earth Orbit | Lunar Transfer Orbit | Low Lunar Orbit | Lunar Descent Orbit | Lunar Landing |
|---|---|---|---|---|---|
| Low Earth Orbit | | 3.107 km/sec | | | |
| Lunar Transfer Orbit | 3.107 km/sec | | 0.837 km/sec | | 3.140 km/sec |
| Low Lunar Orbit | | 0.837 km/sec | | 0.022 km/sec | |
| Lunar Descent Orbit | | | 0.022 km/sec | | 2.684 km/sec |
| Lunar Landing | | 2.890 km/sec | | 2.312 km/sec | |

# LOI ΔV Based on Landing Site

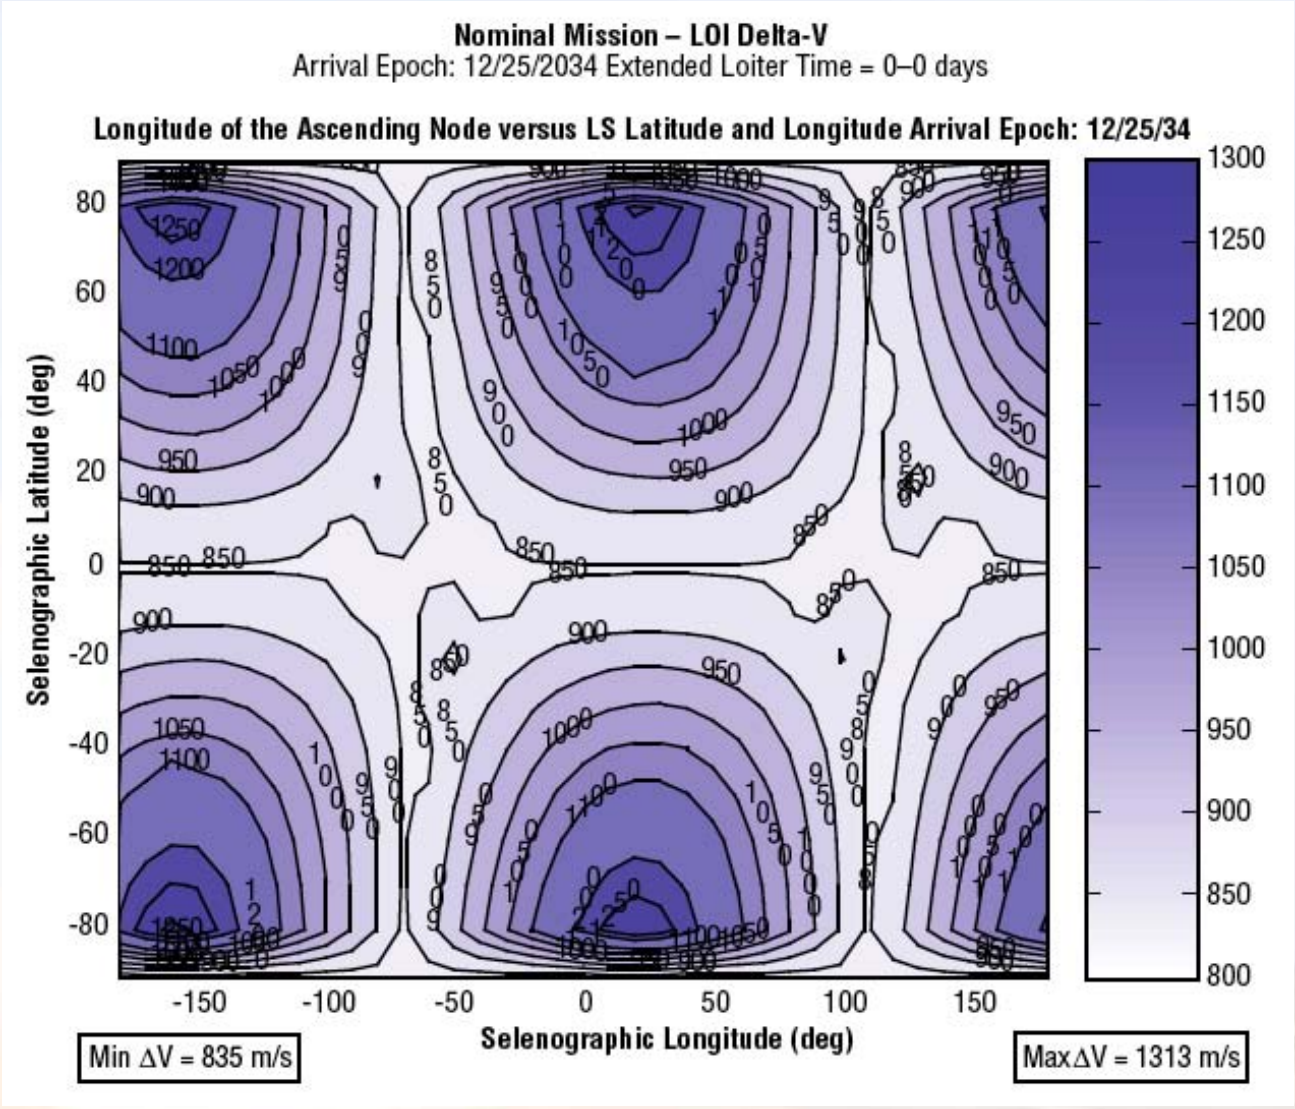

# LOI ΔV Including Loiter Effects

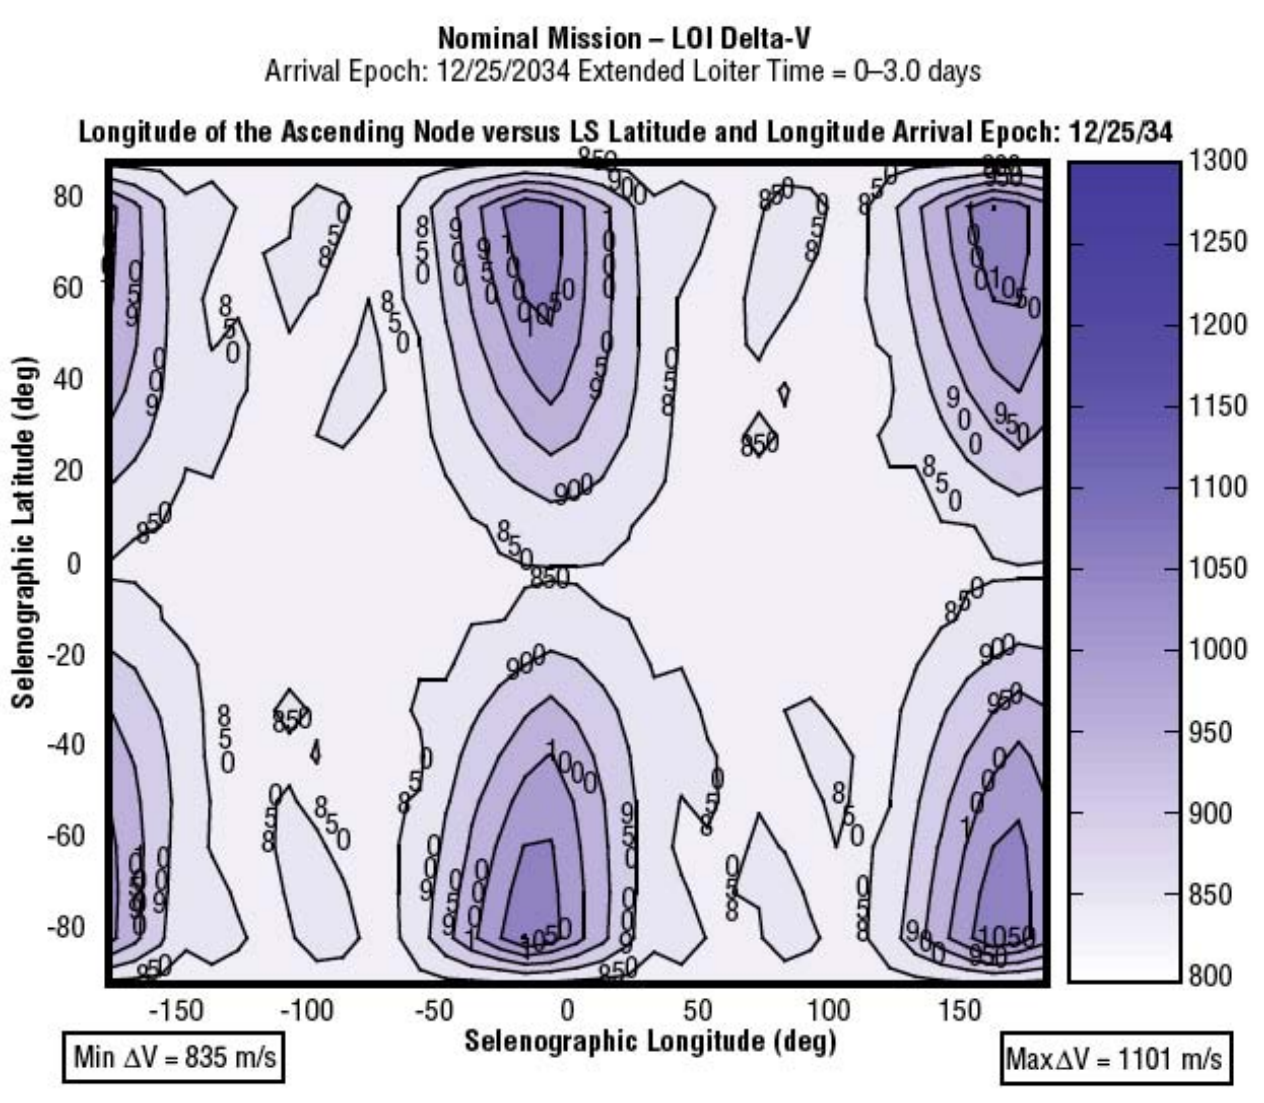

# Interplanetary Trajectory Types

## "Short-Stay" ("Opposition-Class")

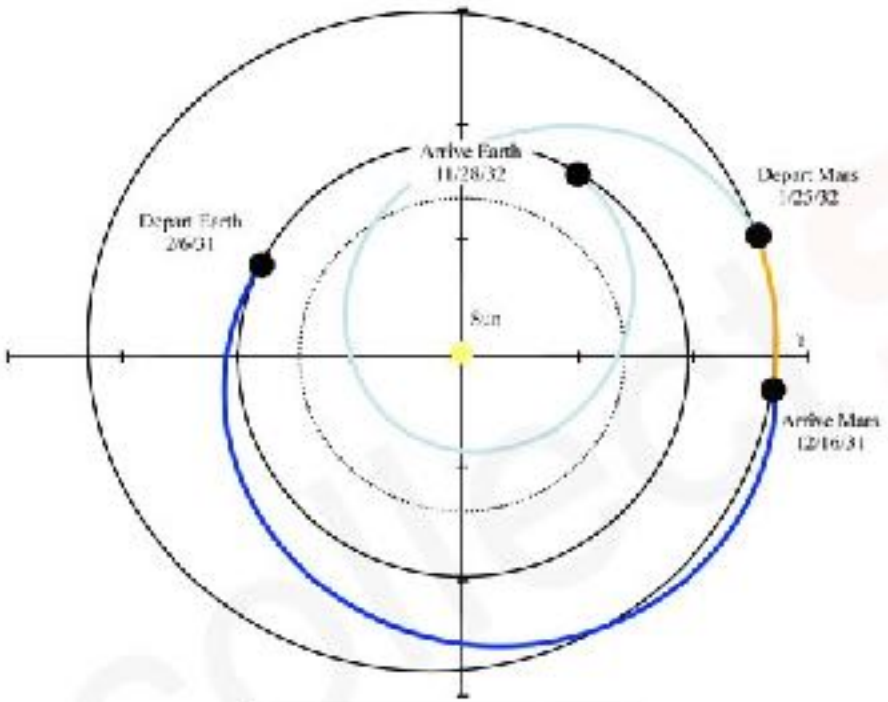


| MISSION TIMES | |
|---|---|
| Outbound | 313 days |
| Stay | 40 days |
| Return | 308 days |
| Total Mission | 661 days |

## "Long-Stay" ("Conjunction-Class")

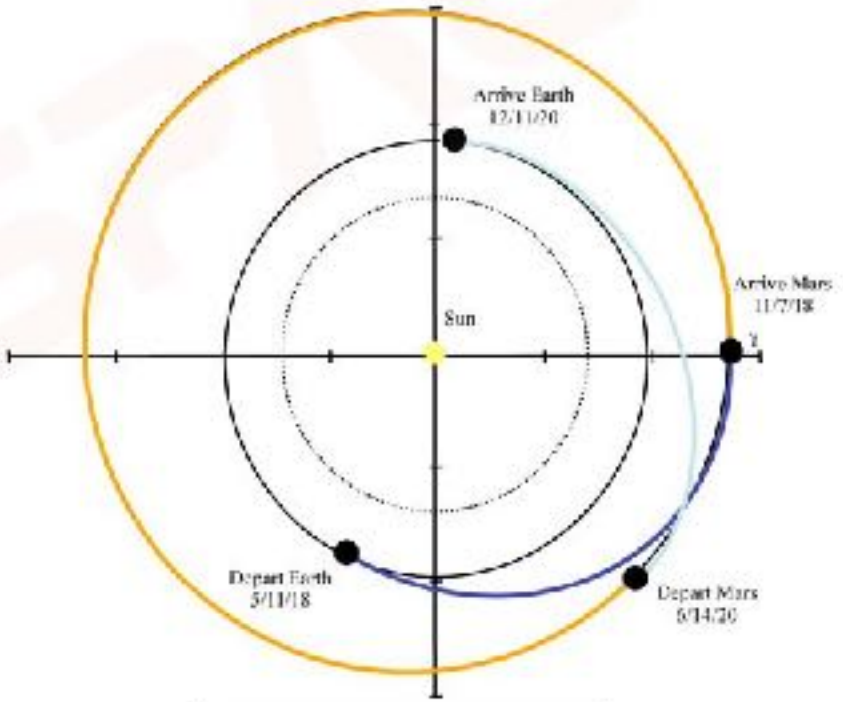


| MISSION TIMES | |
|---|---|
| Outbound | 180 days |
| Stay | 545 days |
| Return | 180 days |
| Total Mission | 905 days |

# Interplanetary "Pork Chop" Plots

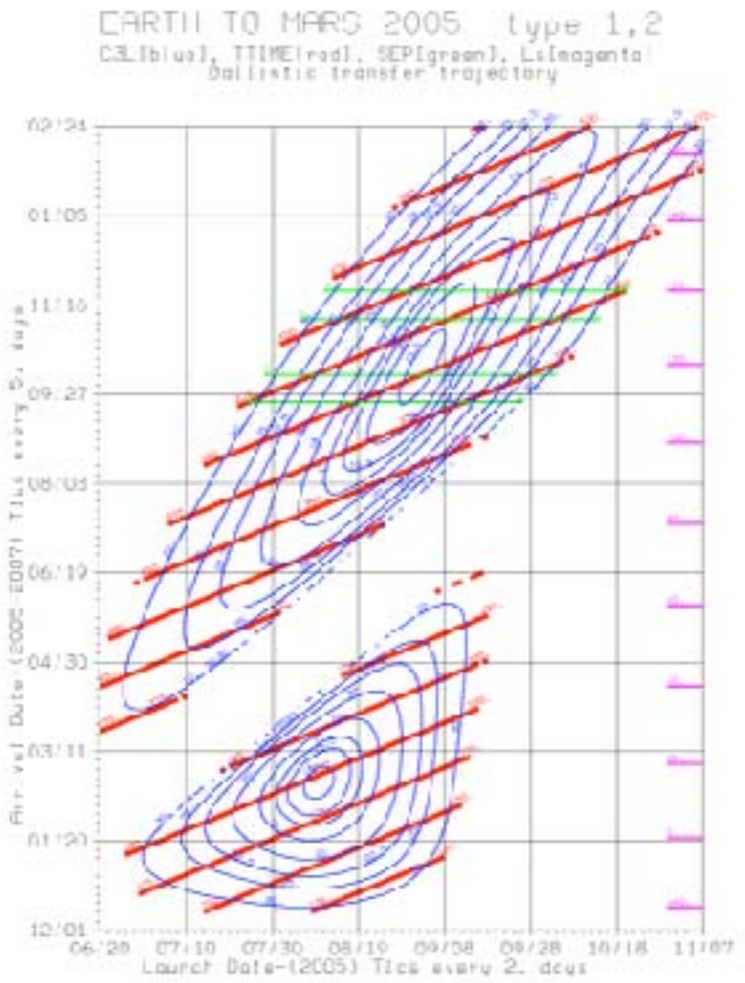


- Summarize a number of critical parameters
  - Date of departure
  - Date of arrival
  - Hyperbolic energy ("C3")
  - Transfer geometry
- Launch vehicle determines available C3 based on window, payload mass
- Calculated using Lambert's Theorem

# C3 for Earth-Mars Transfer 1990-2045

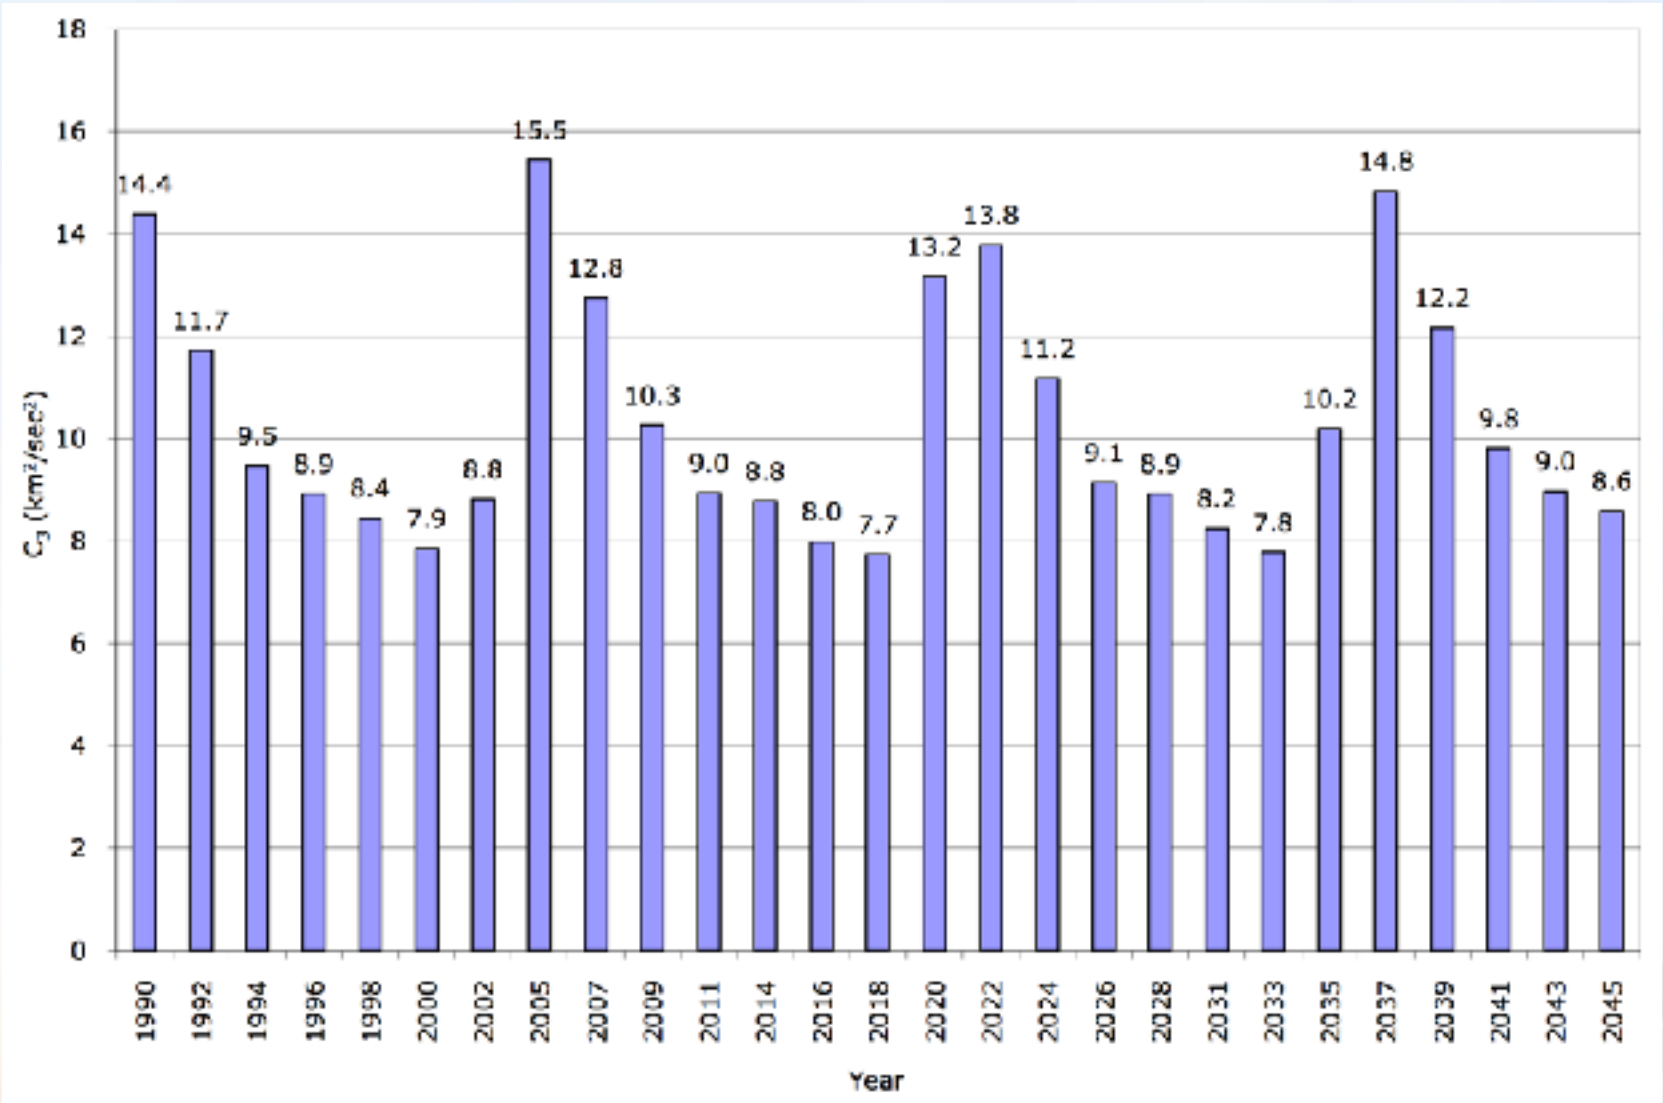

# Earth-Mars Transfer 2033

| Mission type | Earth departure date (m/d/yr) | Mars arrival date (m/d/yr) | $C_3$ ($km^2/sec^2$) | Right ascension (deg) | Declination (deg) | Mars arrival excess speed (km/s) |
|---|---|---|---|---|---|---|
| Type 1 | 4/6/33 | 10/1/33 | 8.412 | 271 | –54.9 | 3.956 |
| Type 2 | 4/28/33 | 1/27/34 | 7.781 | 311.4 | –11.2 | 4.377 |
| Type 1 | 4/20/33 | 11/6/33 | 9.266 | 267.1 | –53.2 | 3.311 |
| Type 2 | 1/26/33 | 10/17/33 | 17.78 | 278.3 | –2.53 | 3.831 |

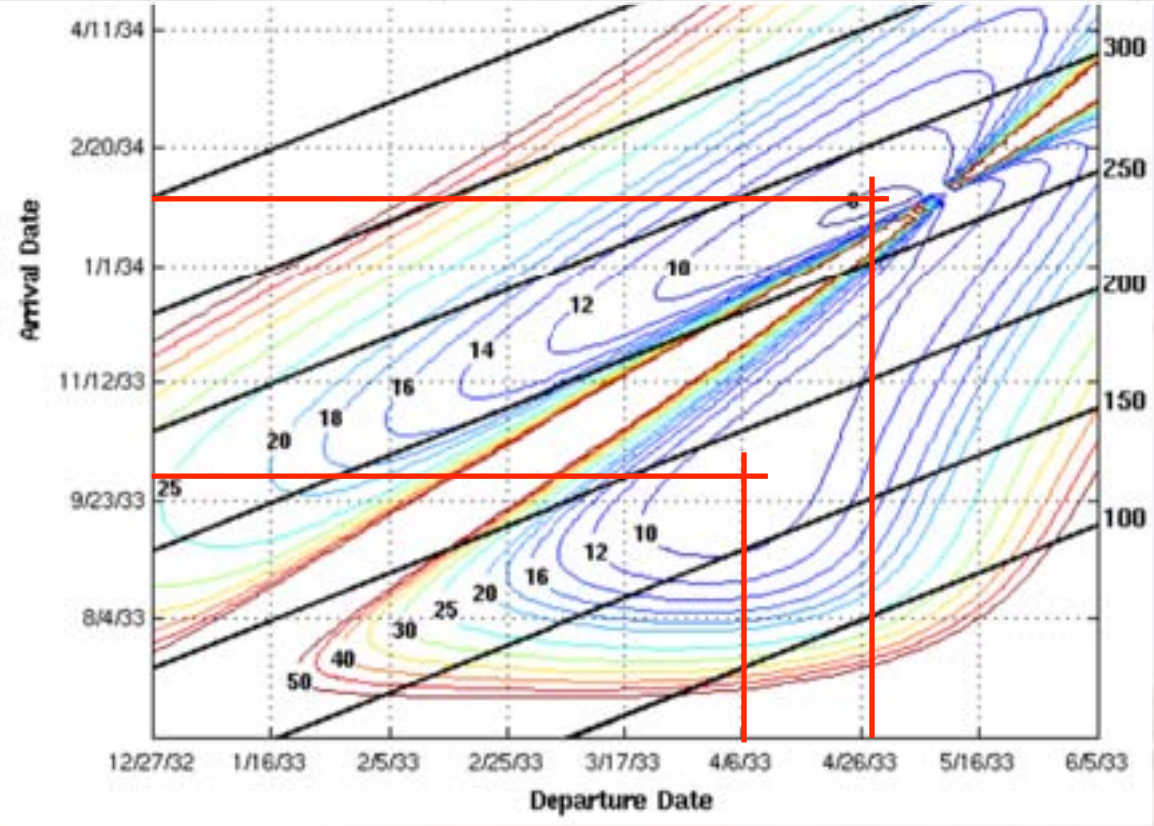

# Earth-Mars Transfer 2037

| Mission type | Earth departure date (m/d/yr) | Mars arrival date (m/d/yr) | $C_3$ ($km^2/sec^2$) | Right ascension (deg) | Declination (deg) | Mars arrival excess speed (km/s) |
|---|---|---|---|---|---|---|
| Type 1 | 6/2/37 | 12/17/37 | **17.07** | 43.45 | 39.79 | 3.344 |
| Type 2 | 6/18/37 | 7/19/38 | **14.84** | 74.97 | 13.59 | 3.356 |
| Type 1 | 6/30/37 | 2/19/38 | 28.33 | 26.54 | 32.34 | **2.334** |
| Type 2 | 4/13/37 | 2/7/38 | 31.13 | 66.88 | 1.891 | **2.422** |

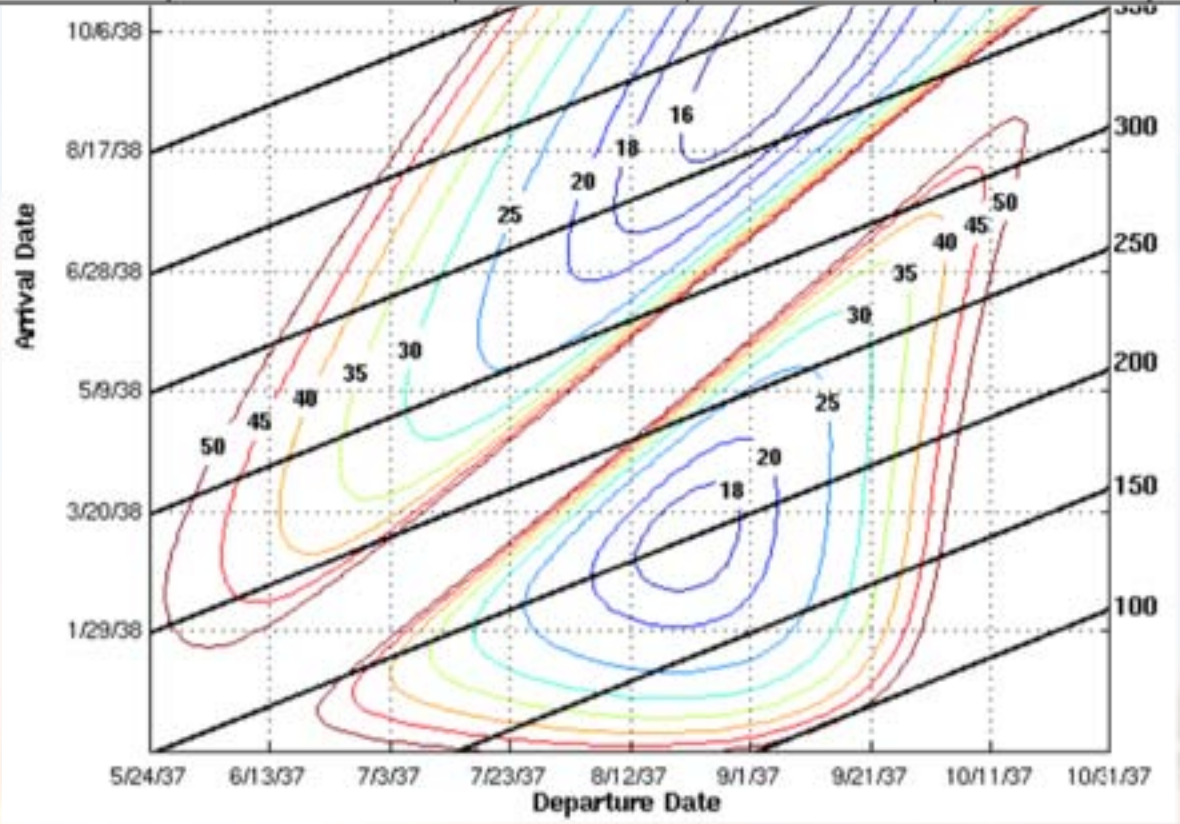

# Interplanetary Delta-V

$$\text{Hyperbolic excess velocity} \equiv V_h$$

$$C_3 = V_h^2$$

$$V_{req} = \sqrt{V_{esc}^2 + C_3}$$

$$\Delta V = \sqrt{V_{esc}^2 + C_3} - V_c$$

$$\text{2033 Window:} \Delta\ V = 3.55\ km/sec$$

$$\text{2037 Window:} \Delta\ V = 3.859\ km/sec$$

$\Delta V$ in departure from 300 km LEO

# Earth-Moon Potential Field

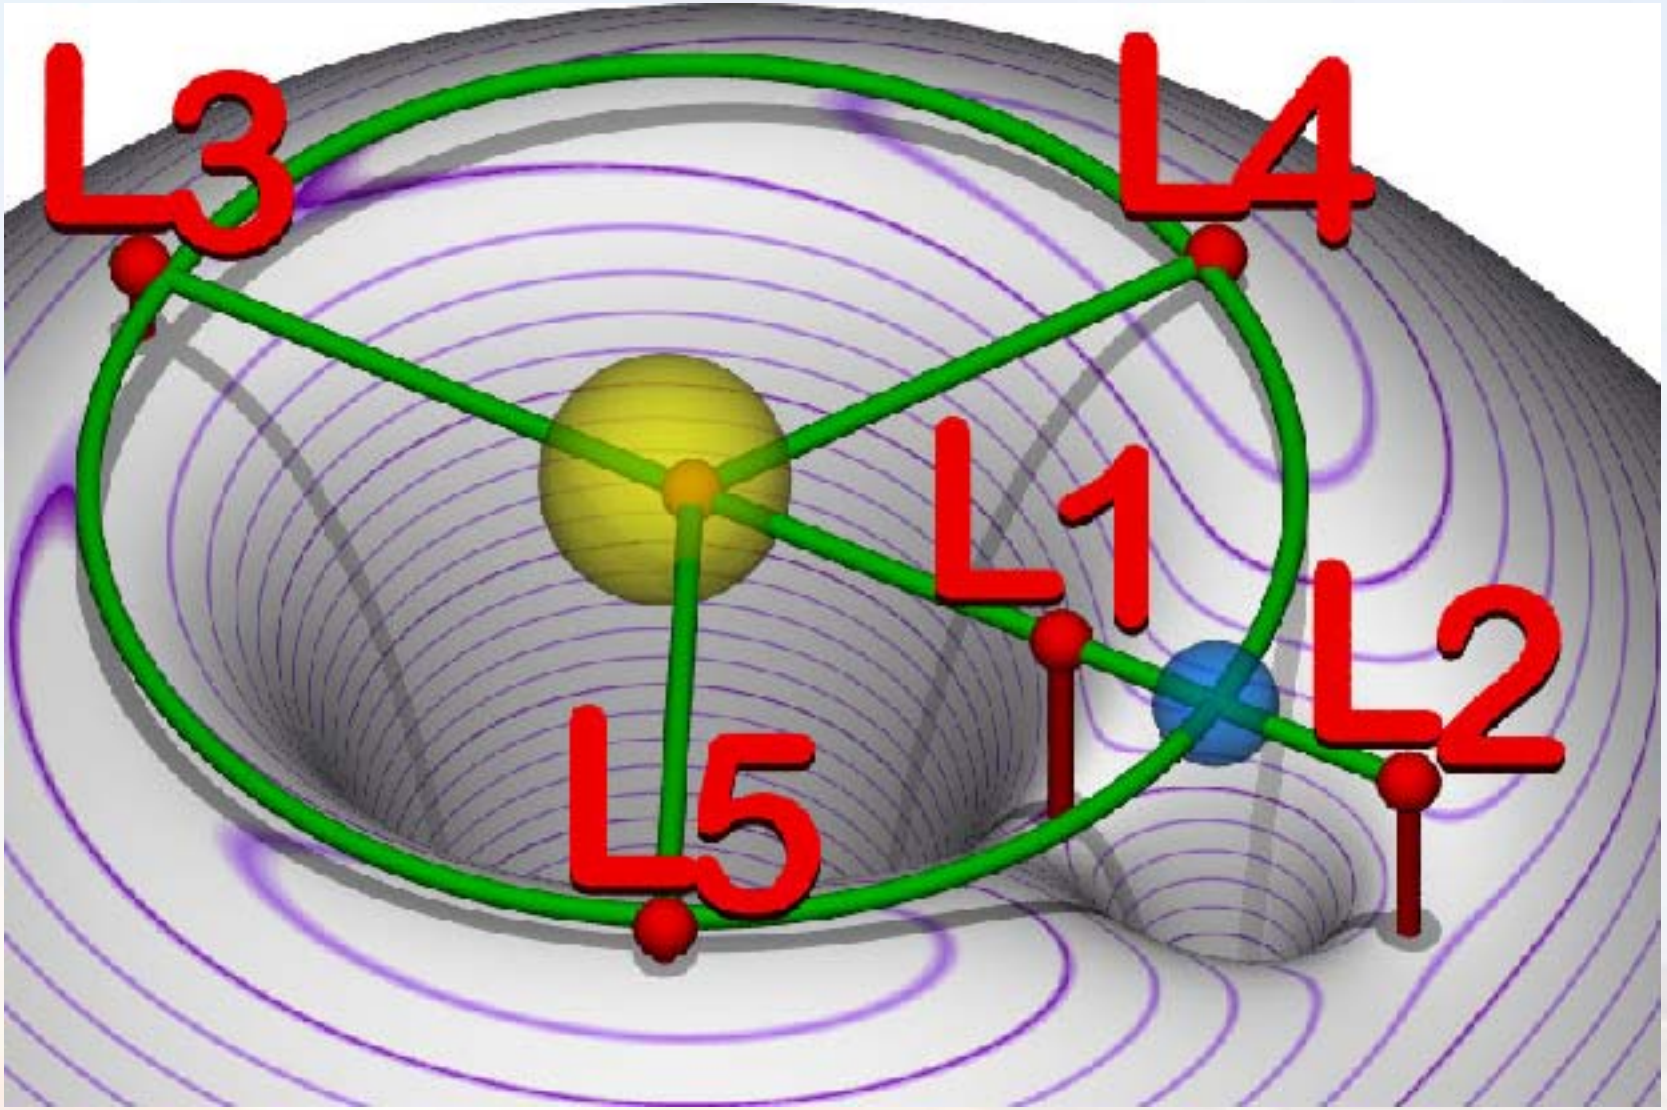

# The Earth-Moon System

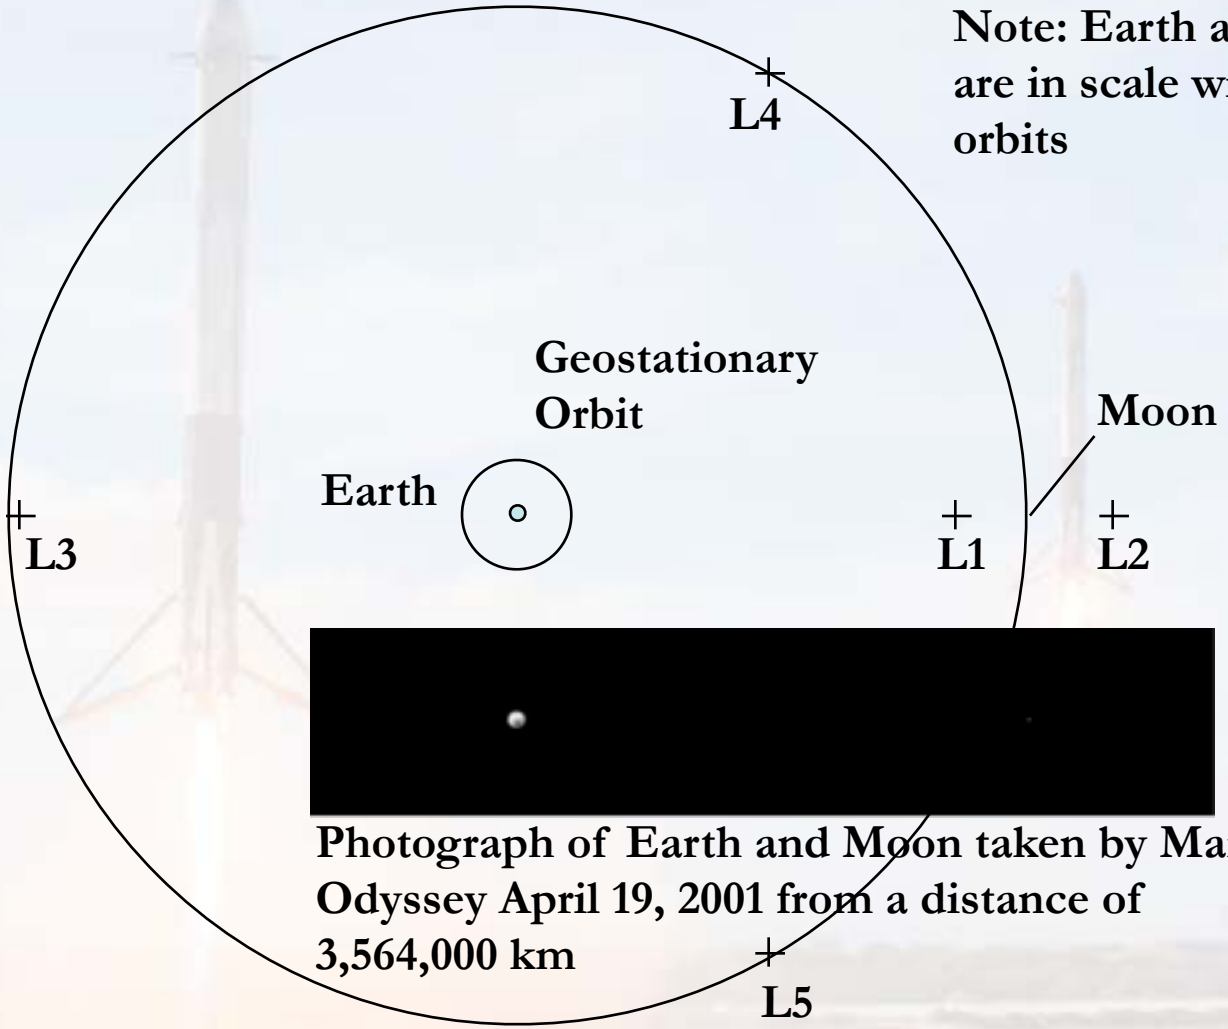


Photograph of Earth and Moon taken by Mars Odyssey April 19, 2001 from a distance of 3,564,000 km

# Free-Body Diagram with Spherical Planet

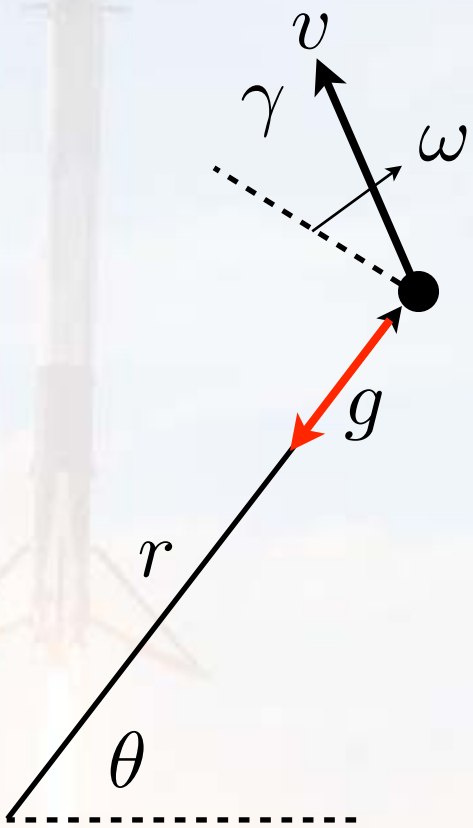

# Orbital Planar State Equations

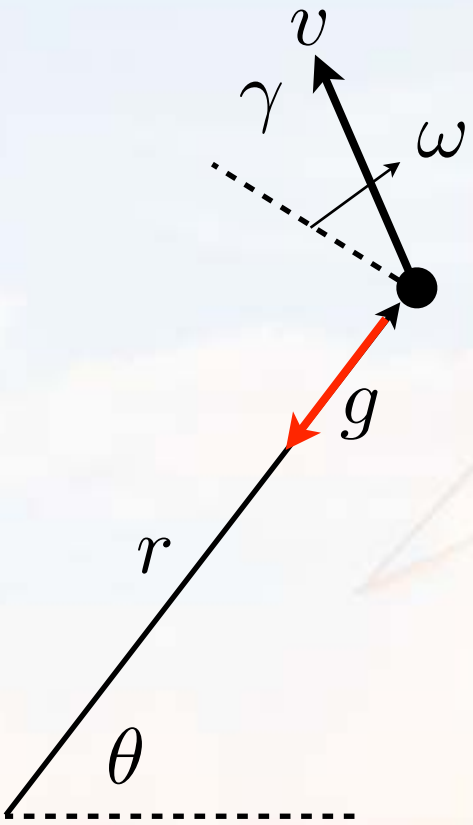


Inertial angular velocity

$$\omega = \dot{\gamma} - \dot{\theta}$$

Sum of accelerations normal to velocity vector

$$-g\cos\gamma = \omega v$$

Sum of accelerations perpendicular to velocity vector

$$-g\sin\gamma = \dot{v}$$

# Orbital Planar State Equations (2)

$$\dot{r} = v \sin\gamma$$

$$r\dot{\theta} = v \cos\gamma$$

$$\omega = \dot{\gamma} - \dot{\theta} = \dot{\gamma} - \frac{v}{r}\cos\gamma$$

$$-g\cos\gamma = \left(\dot{\gamma} - \frac{v}{r}\cos\gamma\right) v$$

$$-\left(g - \frac{v^2}{r}\right)\cos\gamma = \dot{\gamma}v$$

$$-\left(1 - \frac{v^2}{rg}\right) g\cos\gamma = \dot{\gamma}v$$

# Canonical Orbital Planar State Equations

$$\dot{\gamma} = -\frac{1}{v}\left(1 - \frac{v^2}{v_c^2}\right) g \cos\gamma$$

$$\dot{v} = -g \sin\gamma$$

$$\dot{r} = v \sin\gamma$$

$$\dot{\theta} = \frac{v}{r} \cos\gamma$$

Coupled first-order ODEs

$$g = g_o \left(\frac{r_o}{r}\right)^2$$

# Numerical Integration - 4th Order R-K

Given a series of equations $\dot{\bar{y}} = \bar{f}(t, \bar{x})$

$$\bar{k_1} = \Delta t \; \bar{f}\left(t_n, \bar{y_n}\right)$$

$$\bar{k_2} = \Delta t \; \bar{f}\left(t_n + \frac{\Delta t}{2}, \bar{y_n} + \frac{\bar{k_1}}{2}\right)$$

$$\bar{k_3} = \Delta t \; \bar{f}\left(t_n + \frac{\Delta t}{2}, \bar{y_n} + \frac{\bar{k_2}}{2}\right)$$

$$\bar{k_4} = \Delta t \; \bar{f}\left(t_n + \Delta t, \bar{y_n} + \bar{k_3}\right)$$

$$\bar{y_{n+1}} = \bar{y_n} + \frac{\bar{k_1}}{6} + \frac{\bar{k_2}}{3} + \frac{\bar{k_3}}{3} + \frac{\bar{k_4}}{6} + O(\Delta t^5)$$

# References for This Lecture


- Wernher von Braun, *The Mars Project* University of Illinois Press, 1962
- William Tyrrell Thomson, *Introduction to Space Dynamics* Dover Publications, 1986
- Francis J. Hale, *Introduction to Space Flight* Prentice-Hall, 1994
- William E. Wiesel, *Spaceflight Dynamics* MacGraw-Hill, 1997
- J. E. Prussing and B. A. Conway, *Orbital Mechanics* Oxford University Press, 1993